


molex

INSULATION DISPLACEMENT CABLE:
 0.050" PITCH, 28 AWG, 19/40 STRANDED, EXTRUDED FEP

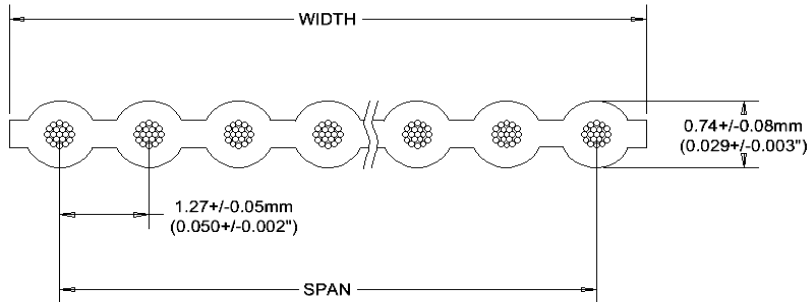

Cond. No.	Part Number	Span	Width
2	1000570226	$1.3 \pm 0.051\text{mm}$ (0.050 ± 0.002 "	$2.54 \pm 0.13\text{mm}$ (0.100 ± 0.005 "

CHARACTERISTICS		
Conductor	28 AWG, 19/40, Silver Plated Copper	
Insulation	FEP	
Color	Natural	
Impedance (ohms)	115 Unbalanced	165 Balanced
Capacitance (pF/ft)	10.5 Unbalanced	6.0 Balanced
Inductance (uH/ft)	0.14 Unbalanced	0.16 Balanced
Insulation Resistance (Mohm)	>500	
Voltage Rating	300V	
Temperature Rating	200C	

STANDARD PACKAGING

100 ft./spool, 10 Ft. minimum length

UL STYLE 20424