

REV. Status
 PRELIMINARY
 01/16/01 MP
 PRELIMINARY 1
 ADDED UL
 APPROVAL
 01/24/01 JC
 PRELIMINARY 2
 ADDED UL
 MARKING TO ISO
 02/09/01 MP
 PRELIMINARY 3
 CHANGED 4
 FROM 1.5mH
 03/01/01 MP

ADSL transformer for use with Texas Instruments ADSL IC chip TNET5000P CPE side

- A. Electrical Specifications (@ 25°C)
1. Primary (Line side) Impedance; 100Ω
 2. Secondary (IC side) Impedance; 25Ω
 3. Longitudinal Balance; 60dB MIN @ 100KHz, 0dBm (Per ITU method pin 10 grounded)
 4. Primary Open Circuit Inductance; 1.52mH ±5% @ 10KHz, 0.1Vrms Measured (1-4)
 5. Leakage Inductance; 15μH MAX @ 100KHz, 0.1Vrms Measured (1-4) with 7 & 10 shorted
 6. Interwinding Capacitance: 35pF MAX @ 100KHz, 0.1Vrms Measured (1-10)
 7. Total Harmonic Distortion; -80dB MAX @ 100KHz
 8. DC Resistance; (1-4)=2.0Ω MAX (7-10)=0.55Ω MAX
 9. Turns Ratio; (10-7):(1-4)=1:1.95±2%
 10. Dielectric Strength; 1875Vrms 1 second @ Pri to Sec

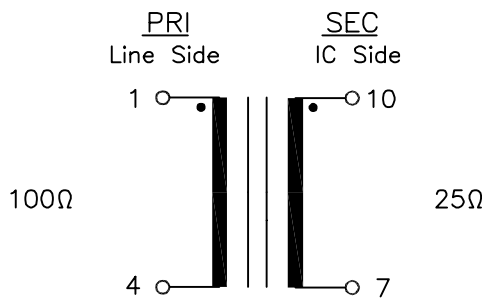

 UL# E208555

MODEL NUMBER
TTC-4069

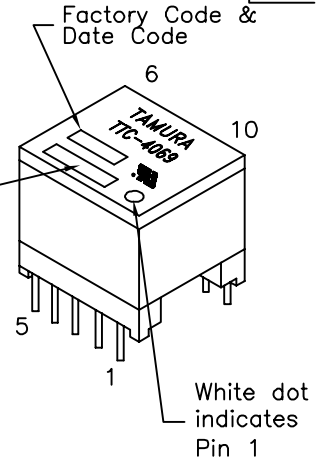
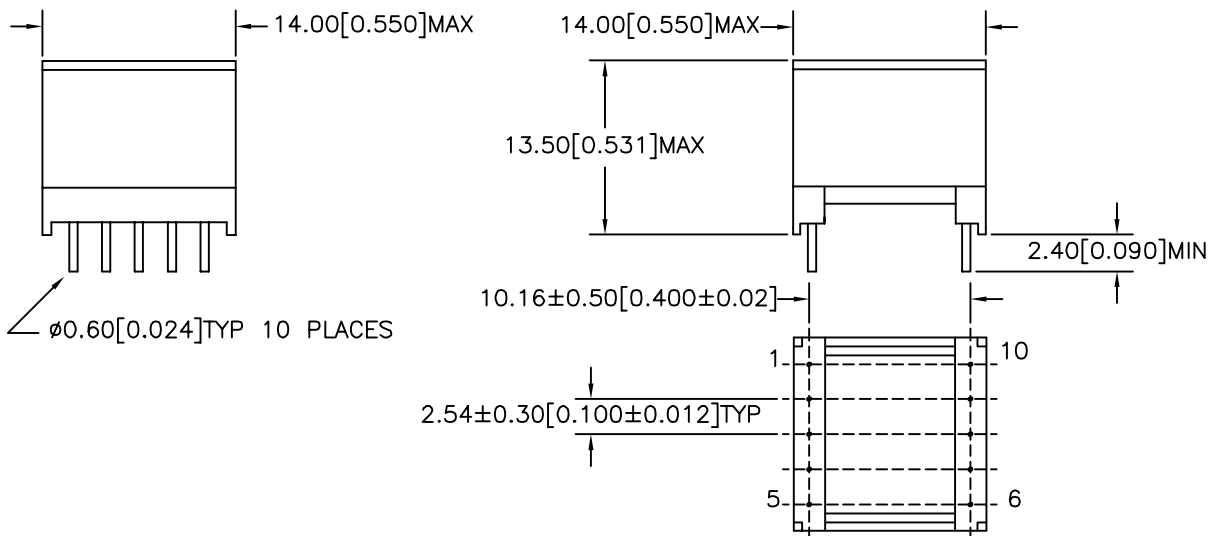
B. Marking; TTC-4069, TAMURA, date code and country of origin

C. Safety; Approved to UL1950 3rd Edition, File No. E208555
 Complies with IEC950

D. Schematic;



E. Mechanical Specifications;



PREPARED BY:

D. Rund

ENGINEER:

M. Pitchai

QUALITY CONTROL:

D. Kelley

APPROVED:

J. Coleman

DWG CONTROL NO.
 P-A1-12648
 ACAD\TTC\A1126481.DWG

REV
PR3

ADSL
 TRANSFORMER

TAMURA CORPORATION OF AMERICA
 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
 (909) 699-1270 FAX 9096769482

TTC-4069

MODEL SPECIFICATION

DIM: mm(In) SCL: 2/1 SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.