



UNIT : mm

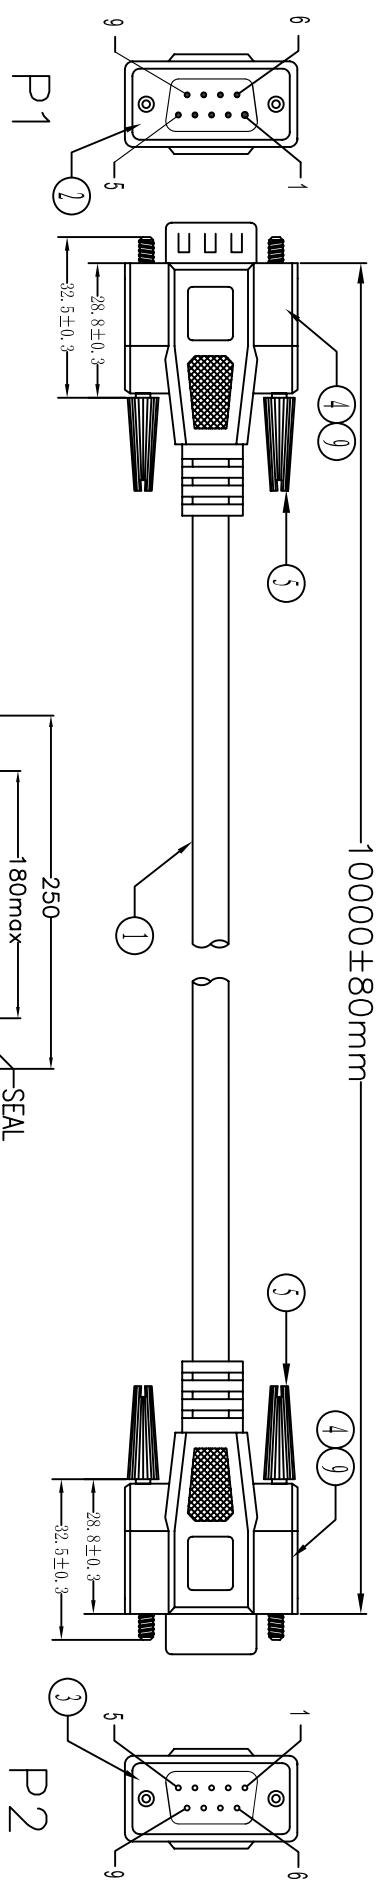

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

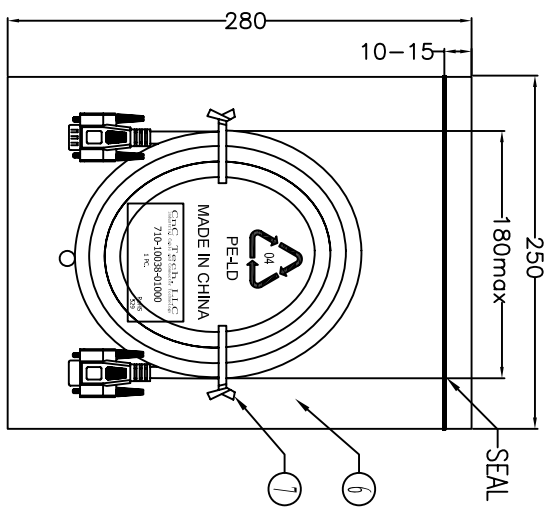

PIN ASSIGNMENT

P1	1	BLACK	P2	1
	2	GREY		2
	3	YELLOW		3
	4	PURPLE		4
	5	ORANGE		5
	6	RED		6
	7	BROWN		7
	8	GREEN		8
	9	BLUE		9
SHELL		D.W	SHELL	

⑨	TUBE	2	HEAT SHRINK TUBE BLACK OD:1.5*1.15MM
⑧	PE BAG	1/5	CLEAR SIZE:360*380*0.05mm PRINT BLACK*MADE IN CHINA**"SPCS"及印性:产周期,有透气孔.
⑦	TIE	2	WHITE L=180mm
⑥	PE BAG	1	CLEAR SIZE:250*280*0.05mm PRINT BLACK*MADE IN CHINA**"1PC"及印性:产周期,有透气孔.
⑤	SCREW	4	SCREW:#4-40UNC D-E L32.5mm,NICKEL PLATED,INSULATION COLOR BEIGE(V-29)
④	OUT JACKET	4*3.5g	BEIGE(V-29) 40P PVC(MOULD NO:WM-113)
③	CONN	8g	CLEAR LDPE(MOULD NO:NM-049)
②	CONN	1	DB 9PIN FEMALE PIN G/F SHELL-NICKEL SOLDER TYPE INSULATION COLOR BLUE
①	CABLE	1	DB 9PIN MALE PIN G/F SHELL-NICKEL SOLDER TYPE INSULATION COLOR BLUE
			NOUL 30AWG(7/0.10)*9C+D+W+AL/MY+JACKET CONOL:BEIGE(V-29) OD:5.0mm L:10000+50/-0mm.

Cnc Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHSH	DARWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	710-10038-01000
DECIDE BY		DATE	2012-02-06
VERSIONS/EDITION	A/0	PROJECTION	