
## NEWNEX PROPRIETARY

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

COMPANY NAME	CUSTOMER SIGNATURE	DATE

## **COMMENTS:**


\*RoHS compliant product

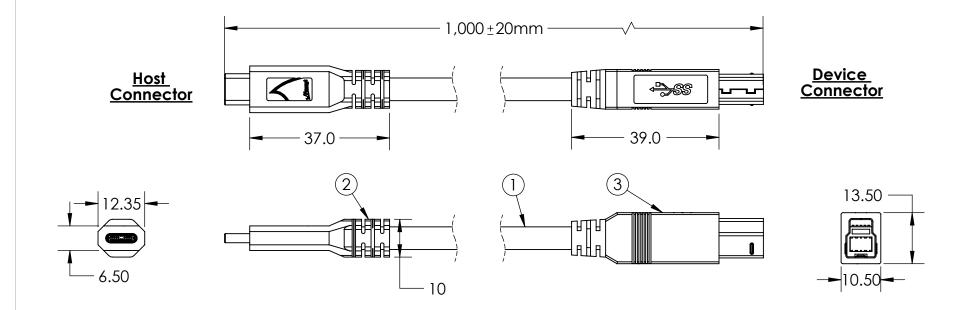

	WIRING STRUCTURE			
Rd=5.1kΩ	Type C	SIGNAL NAME	B Plug	
	A4,B4,A9,B9	VBUS	1	
	- A5	CC	-	
	f	Dn1	2	
	A6	Dp1	3	
	A1,B1,A12,B12	GND+Drain	4,7	
	B10	SDPn1	5	
	B11	SDPp1	6	
	A3	SDPn2	8	
	A2	SDPp2	9	
	SHELL	Shield	SHELL	

## Notes:

- 1. Cable: USB 3.1 Cable, Black Jacket.
- 2. Connector: USB 3.1 C Male With Rd.
- 3. Connector: USB 3.0 B Male,
- 4. Packaging: 1 Piece + PE bag.

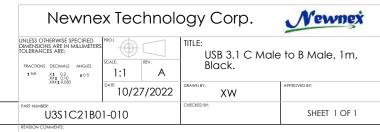

\*Both shell clam and copper foil have 360 degree contact with braiding

\*100% OPEN, SHORT, MISWIRE TESTING

Drawing Generated.