
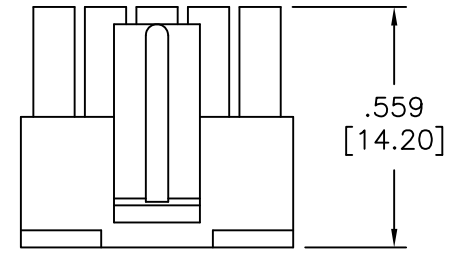

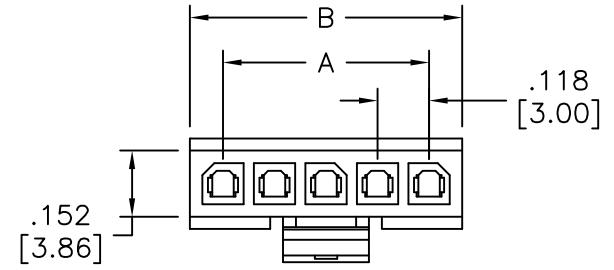



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/2/20	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

NUMBER OF POSITIONS	DIM. A	DIM. B
02	.118 [3.00]	.275 [7.00]
03	.236 [6.00]	.394 [10.00]
04	.354 [9.00]	.512 [13.00]
05	.472 [12.00]	.629 [16.00]
06	.591 [15.00]	.748 [19.00]
07	.709 [18.00]	.866 [22.00]
08	.827 [21.00]	.984 [25.00]
09	.954 [24.00]	1.102 [28.00]
10	1.063 [27.00]	1.220 [31.00]
11	1.181 [30.00]	1.340 [34.00]
12	1.299 [33.00]	1.456 [37.00]



**SPECIFICATIONS:**  
 Material:  
 Insulator: Nylon, rated UL 94V-0, Glow wire compliant  
 Insulator color: Black  
 Electrical:  
 Voltage rating: 250 VAC RMS or DC  
 Current rating: 20 Awg: 5 Amps max  
                   22 Awg: 5 Amps max  
                   24 Awg: 4 Amps max  
                   26 Awg: 3 Amps max  
                   28 Awg: 2 Amps max  
                   30 Awg: 1 Amp max.  
 Insulation resistance: 1000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1500 VAC for 1 minute  
 Mechanical:  
 Wire size: 20 Awg thru 30 Awg  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	
DRAWN	DATE
AY	3/2/20
CHECKED	DATE
AY1	3/2/20
APPROVED	

**ADAM TECH INTERCONNECTS** 909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

TITLE: FEMALE CRIMP HOUSING, SINGLE ROW  
 .118 [3.00] PITCH

SIZE	PART NO.	REV.
X	DMT-1A-XX	-

REF: S00123T SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1

6 5 4 3 2 1