

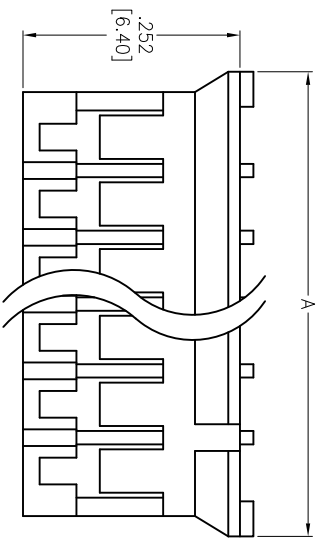


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	
A		REDRAWN	11/16/11	
B		REVISED SPEC.	1/8/13	

APPROVED: _____
 DATE: _____ TITLE: _____

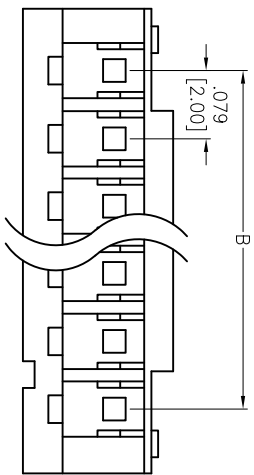

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-2
 Insulator color: White
 Electrical:
 Operating voltage: 150 VAC max
 Current rating: 2 Amp max
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 800 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant

Positions: 2 thru 20
 A = .079 [2.00] x No. of Spaces + .150 [3.80]
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES

.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS	DATE
SS	4/6/05

DRAWN	SS	4/6/05
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] CRIMP HOUSING
 LOW PROFILE, DUAL POLARIZED

SIZE	PART NO.	REV.
X	2CH-C-XX	B
REF:	S00016T	SCALE: NTS
		SHEET 1 OF 1

