Specifications are subject to change. Please refer to the current datasheet on www.grayhill.com for the most current published specifications for this product.

Butt Contact Pushbutton Switches

Grayhill

# SERIES 04 4PST


### **FEATURES**

- Joy Stick Action
- Position Locator On CRT Screens
- · Moves Cursor On Menu Display





## DIMENSIONS in inches (and millimeters)

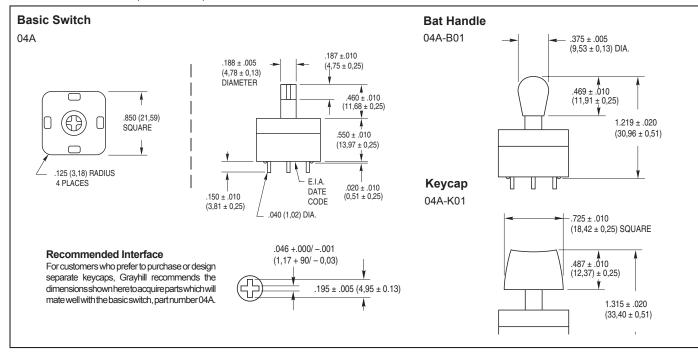


#### SPECIFICATIONS Rating Criteria

Rated: Make and break 250 mA at 115 Vac or 125 mA at 220 Vac resistive load for 500,000 operations Contact Resistance: 25 milliohms maximum on a new switch Insulation Resistance: 1,000 megohms at 100 Vdc Dielectric Strength: 500 Vac RMS minimum Operating Temperature: -40°C to +85° Actuation Force: 13 oz. +/ - 3 oz. Actuation travel: 0.095" +/ - .020" Actuation lever stop strength: 20 lbs. min.

### **Materials and Finishes**

Base, Cover and Switch Actuator: Polyester (Black) Terminals: Brass, gold-plated over nickel Shorting Bar: Phosphor bronze, gold-plated over nickel Spring: Tinned music wire Keycap: ABS or equivalent Bat-Handle: ABS

### CIRCUITRY



### **ORDERING INFORMATION**

Description	Part No.
Basic Switch	04A
Switch with Arrowhead Keycap	04A-K01
Switch with Bat-Handle	04A-B01*

\*Shipped with bat handle permanently attached.

Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.