

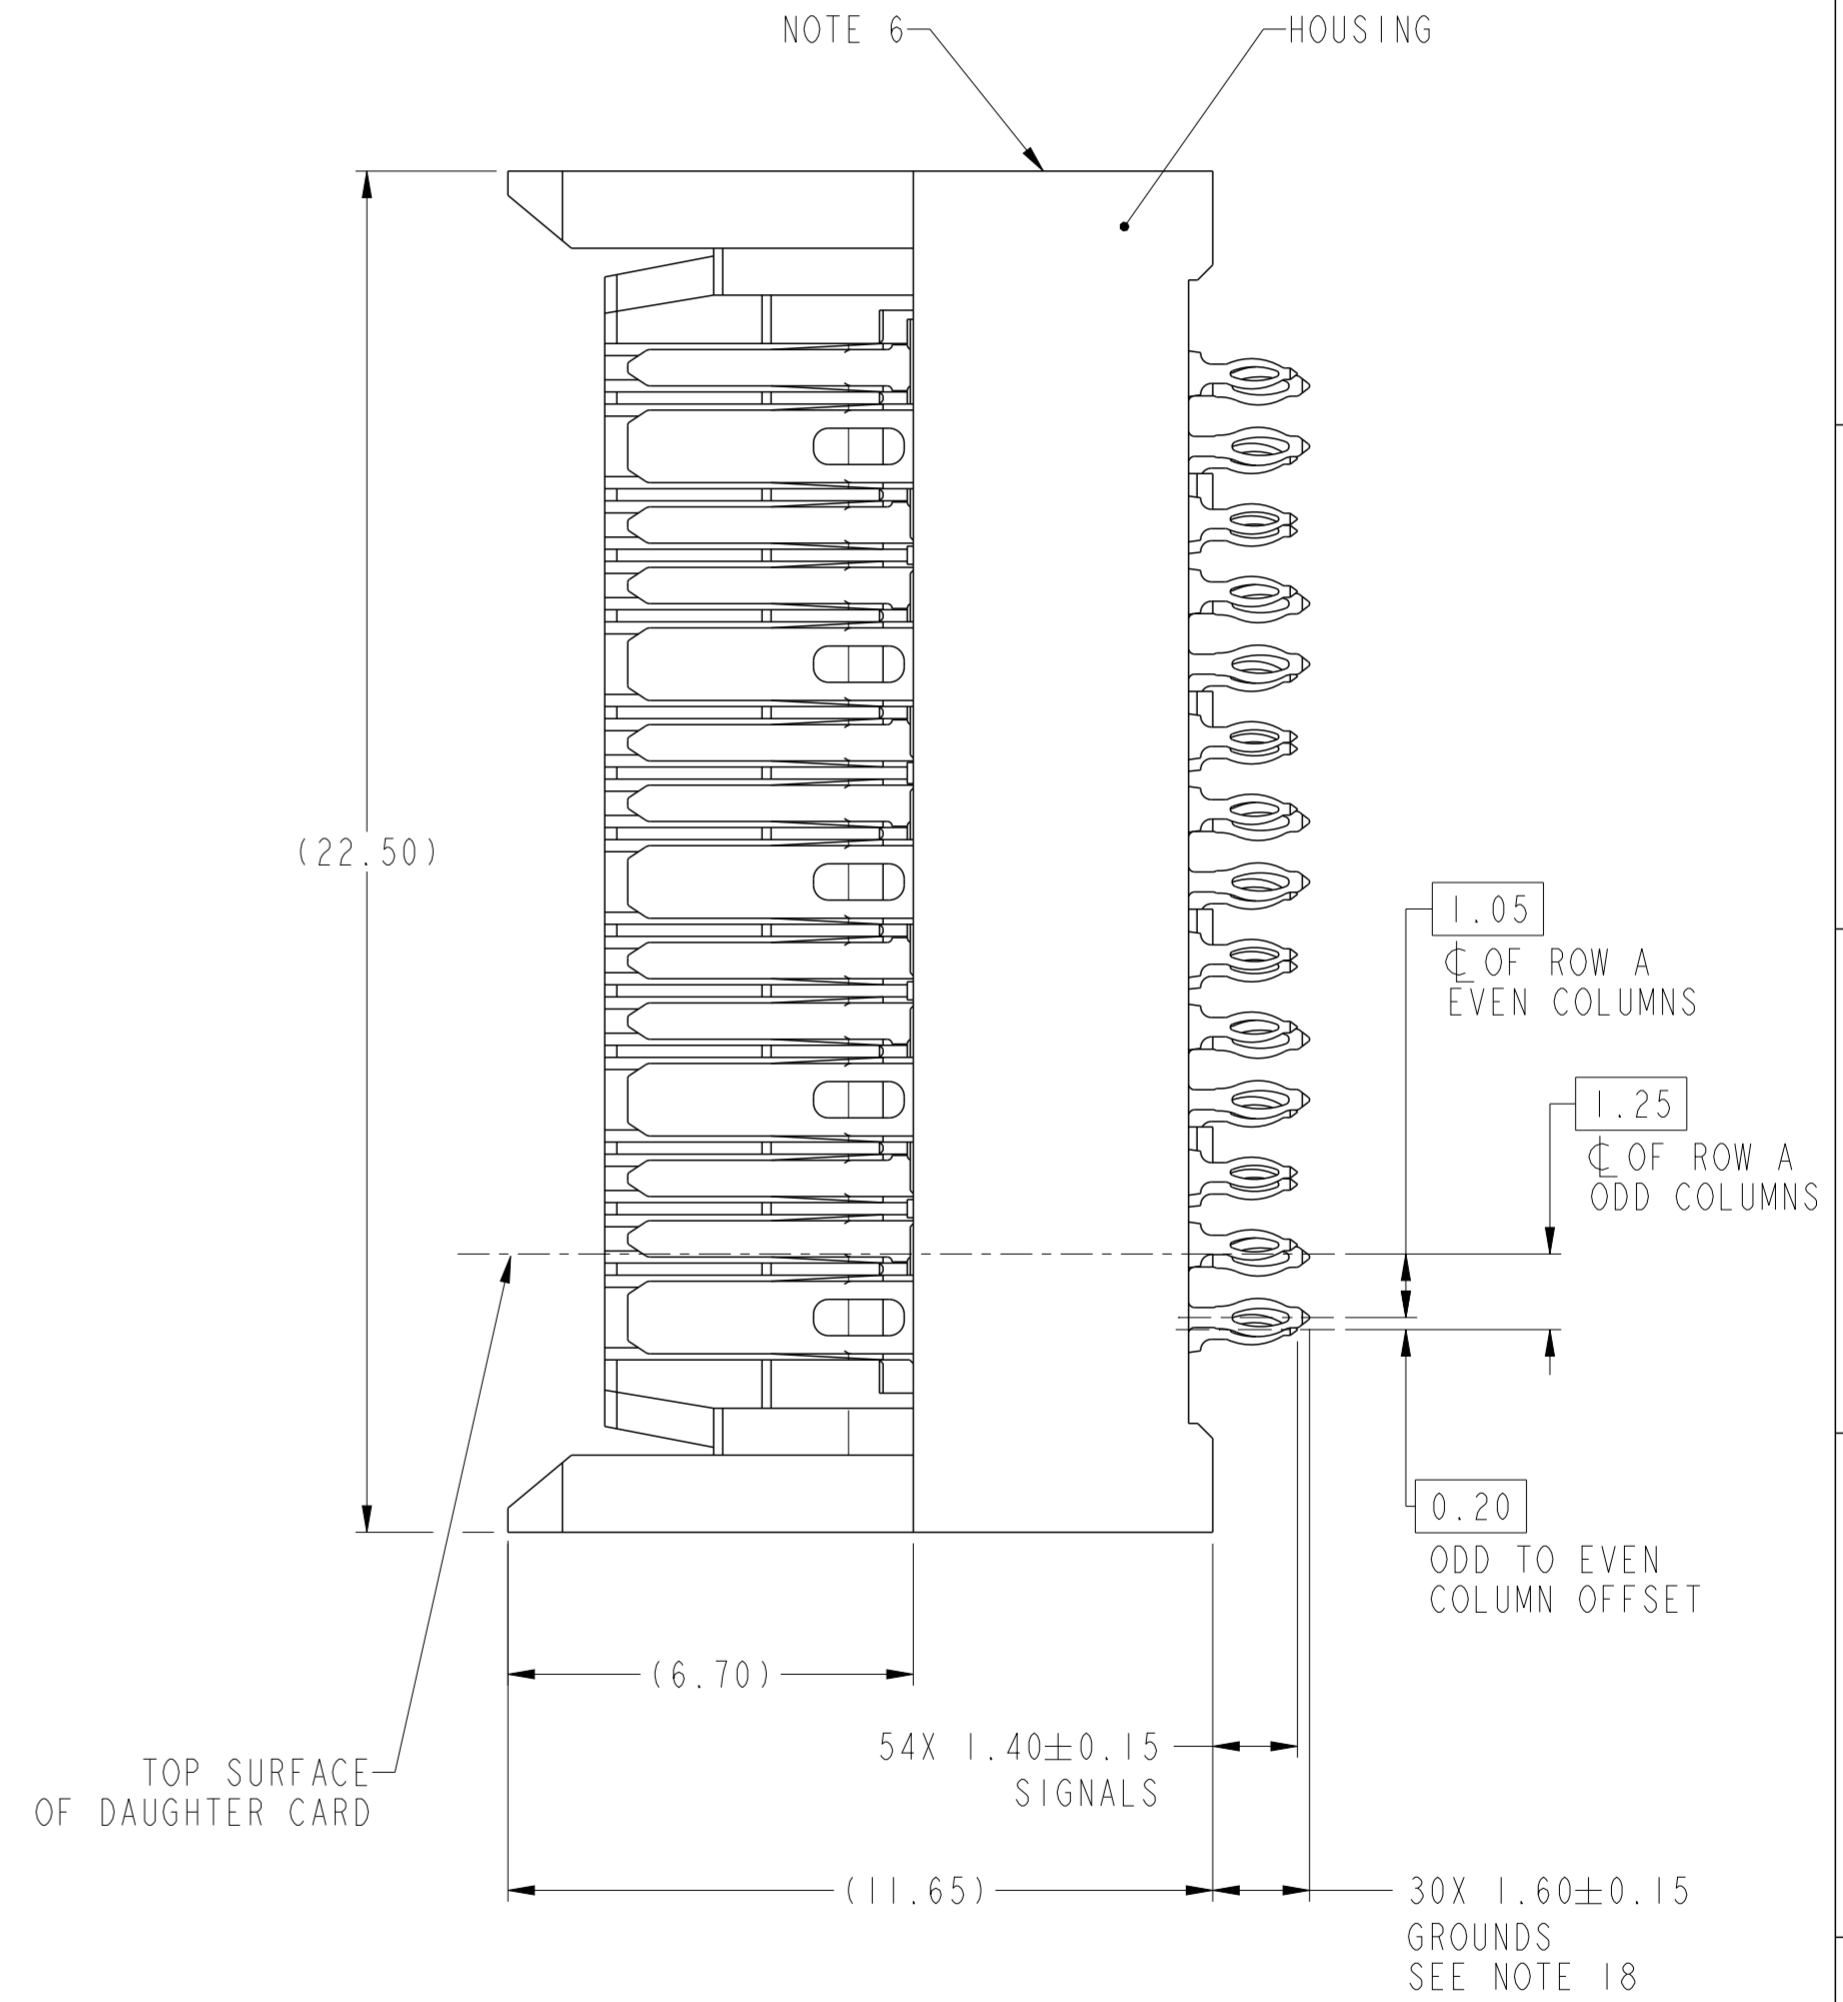
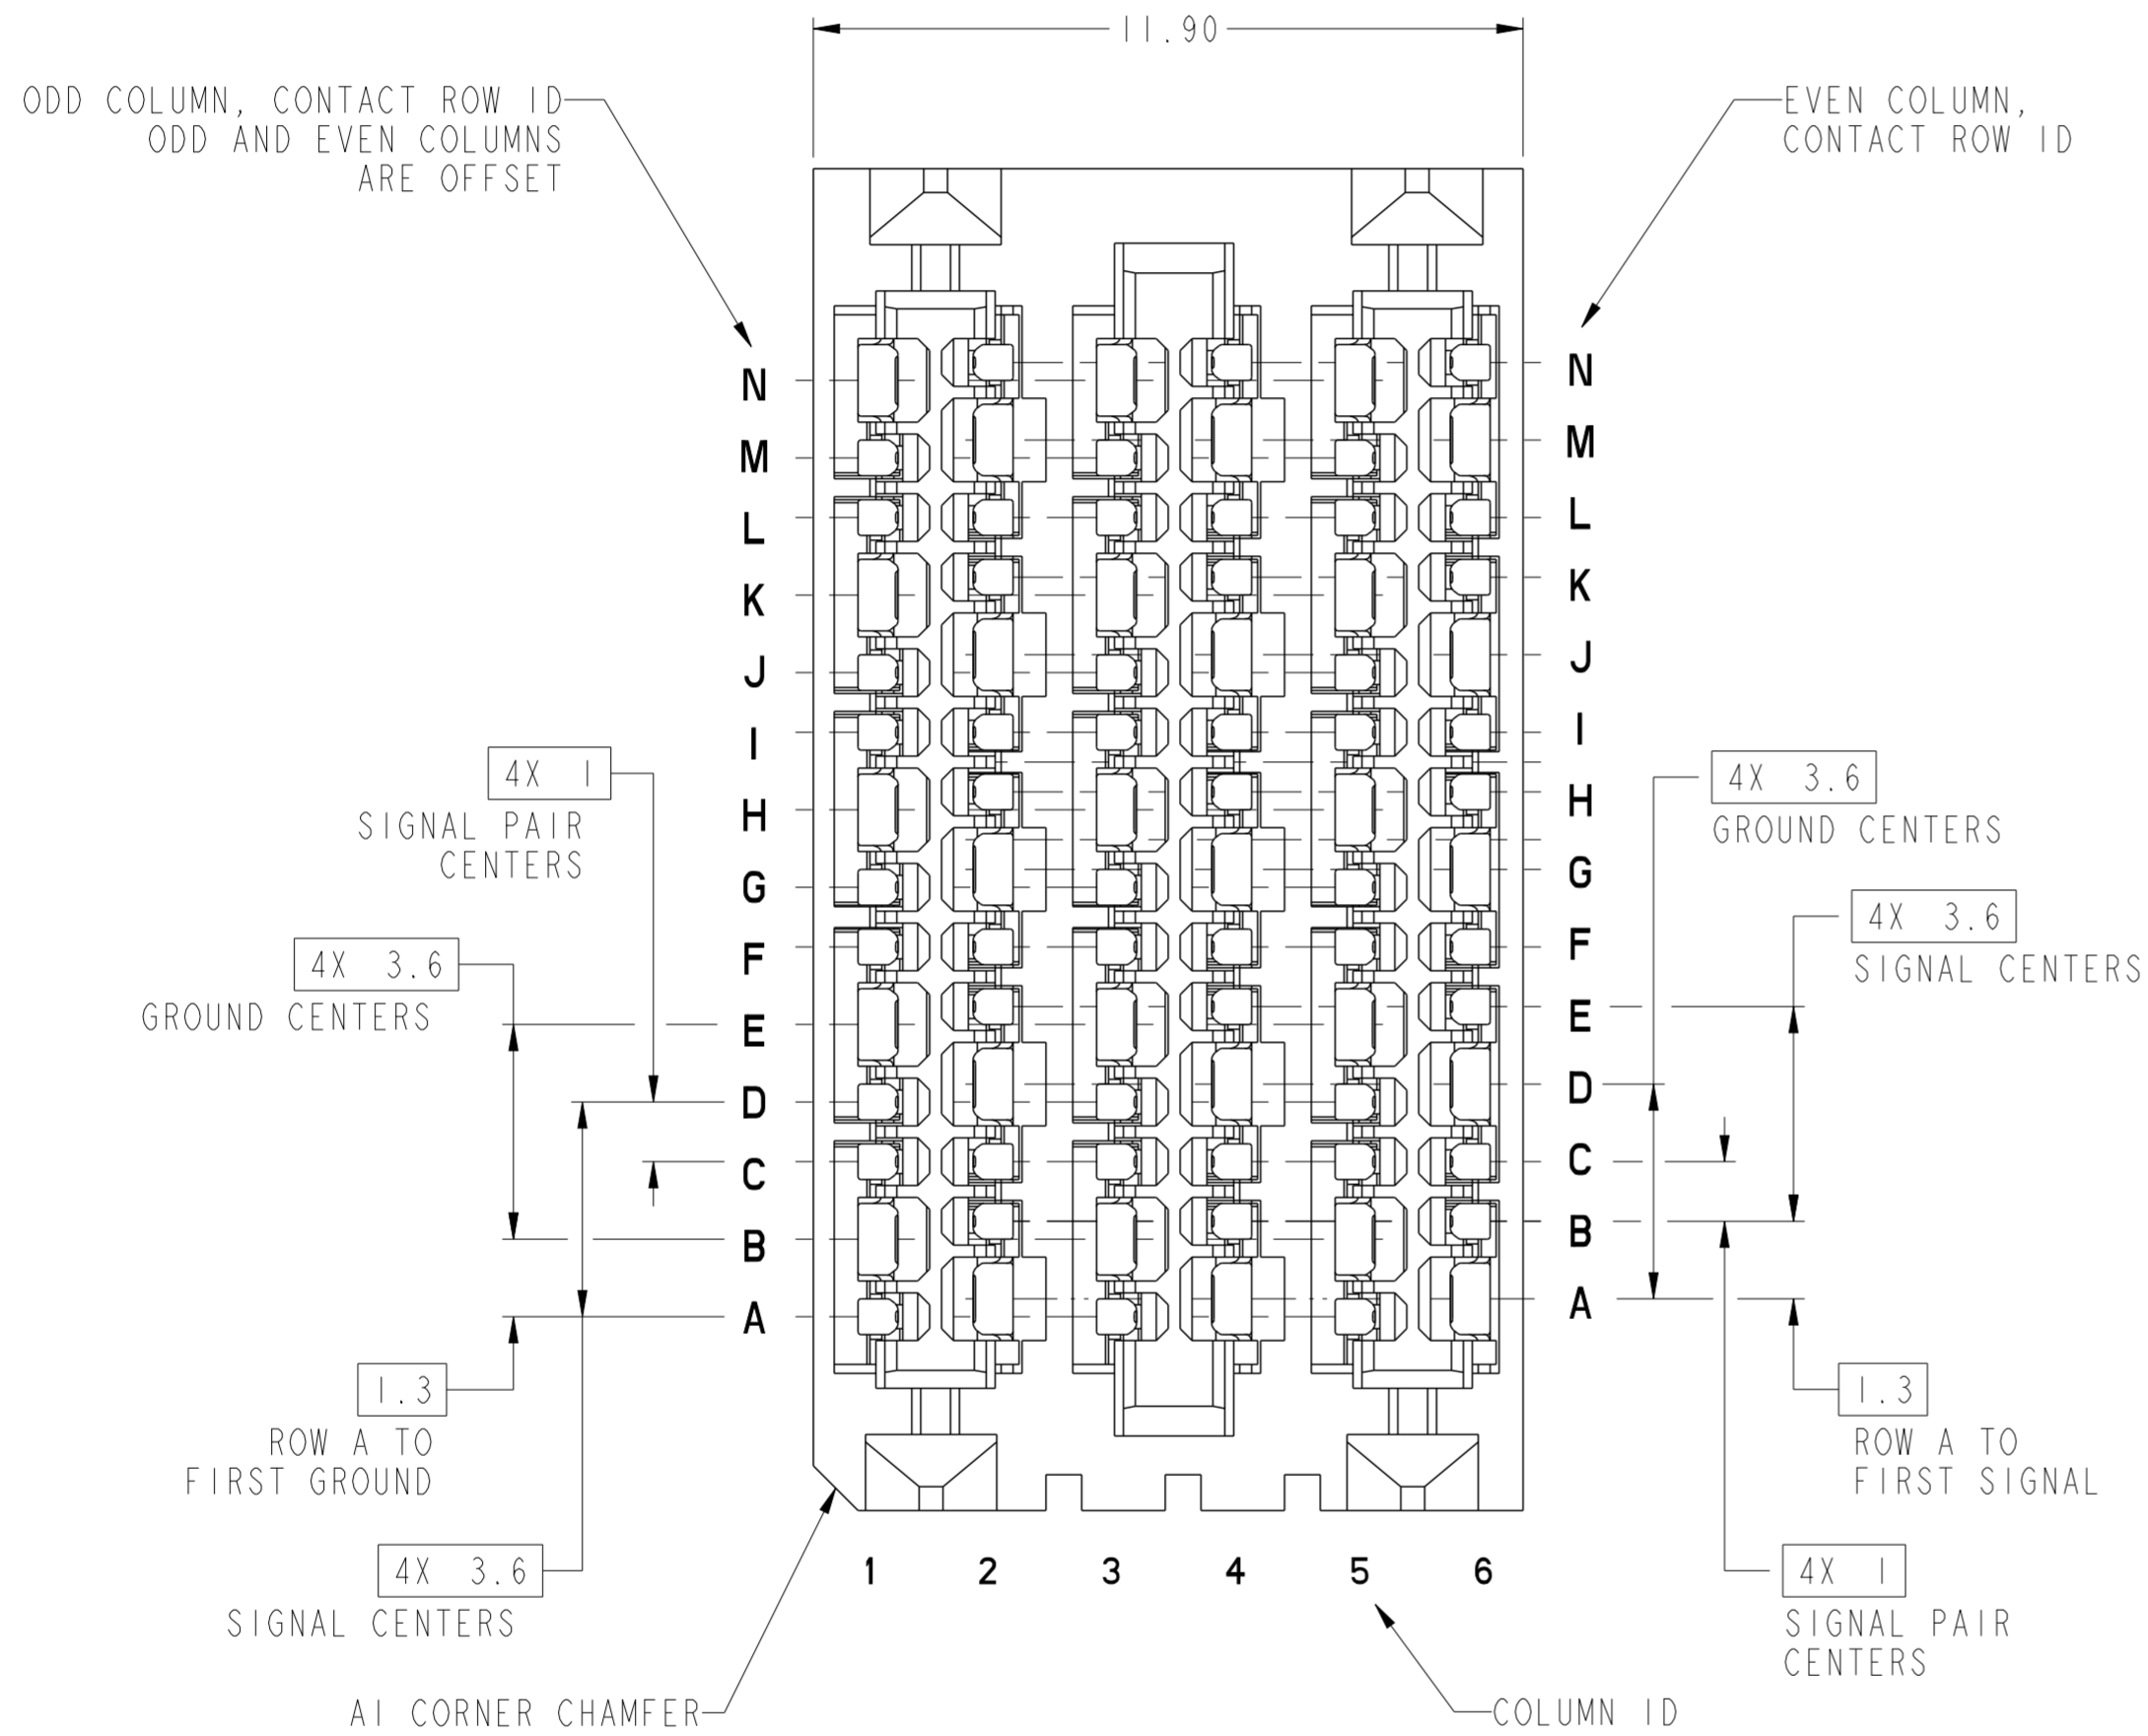


PRODUCT NUMBER
SEE SHEET 10

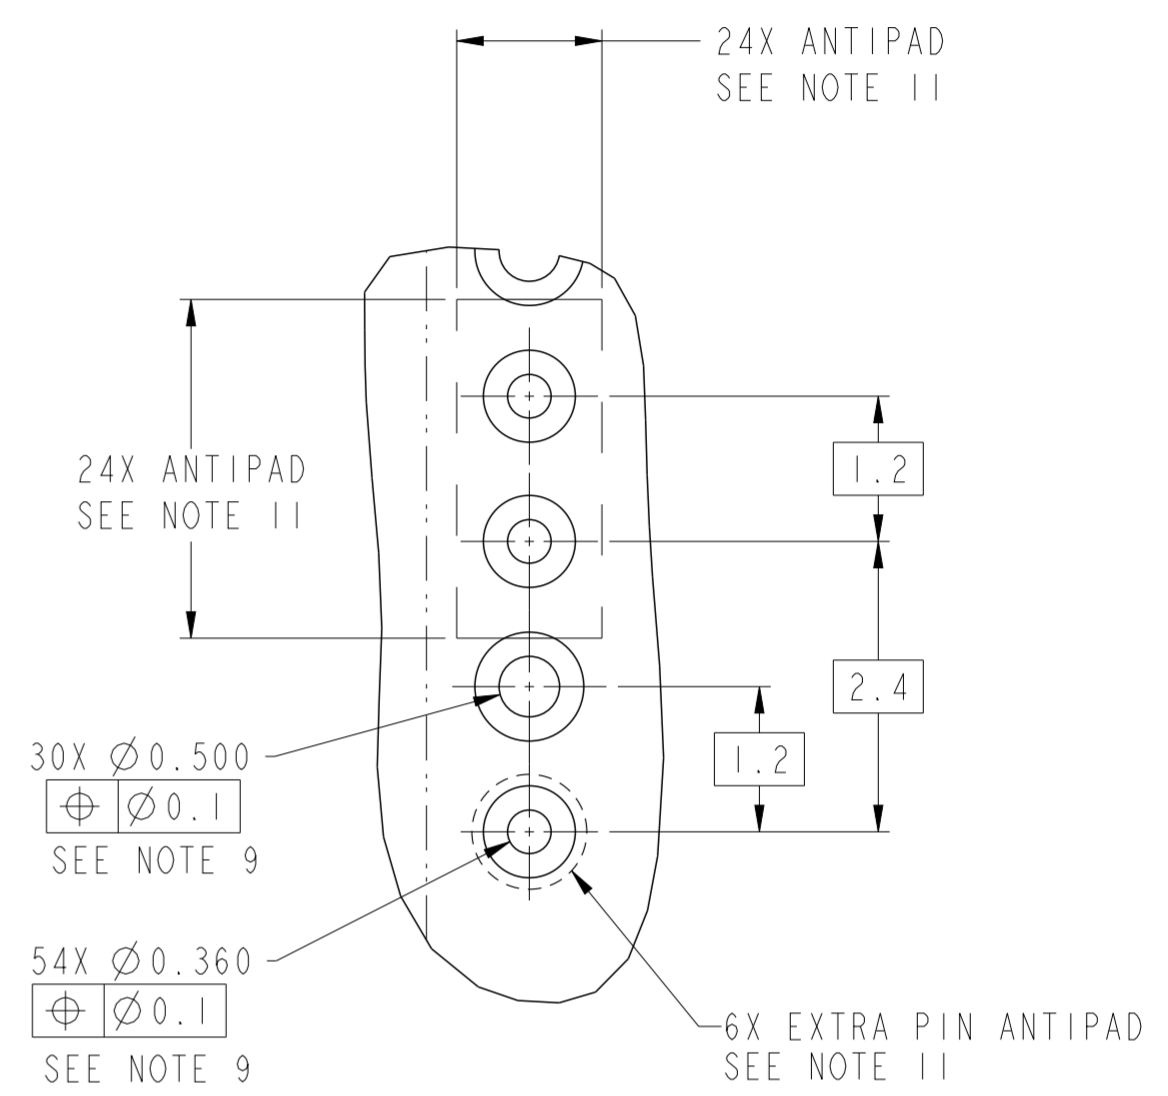


10127896-Y01YLF
(10127896-101YLF STANDARD MATE CONNECTOR SHOWN)

| | | | | | | | | | | |
|---------------|---------------------------------------|-------|--------------|---------------------|------------|--|---------------|----------------|-----------|----------|
| spec ref | SEE NOTES | dr | Heaven Cen | 2013/11/12 | projection | MM | size | A2 | scale | 8:1 |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | eng | Peng-Bing Fu | 2020/08/13 | | | ecn no | ELX-DG-37989-1 | rel level | Released |
| ASME Y14.5M | | chr | - | apppr | | | | | | |
| surface | linear | 0.X | ±.3 | Amphenol FCI | | ExaMAX VERTICAL HEADER ASSY 4 PR, 84 POS, 6 IMLA | | 10127896 | rev B | |
| | | 0.XX | ±.10 | | | | | | | |
| | | 0.XXX | ±.050 | | | | | | | |
| | angular | 0° | ±° | cat. no. | SEE TABLE | Product - Customer Drw | sheet 1 of 11 | | | |

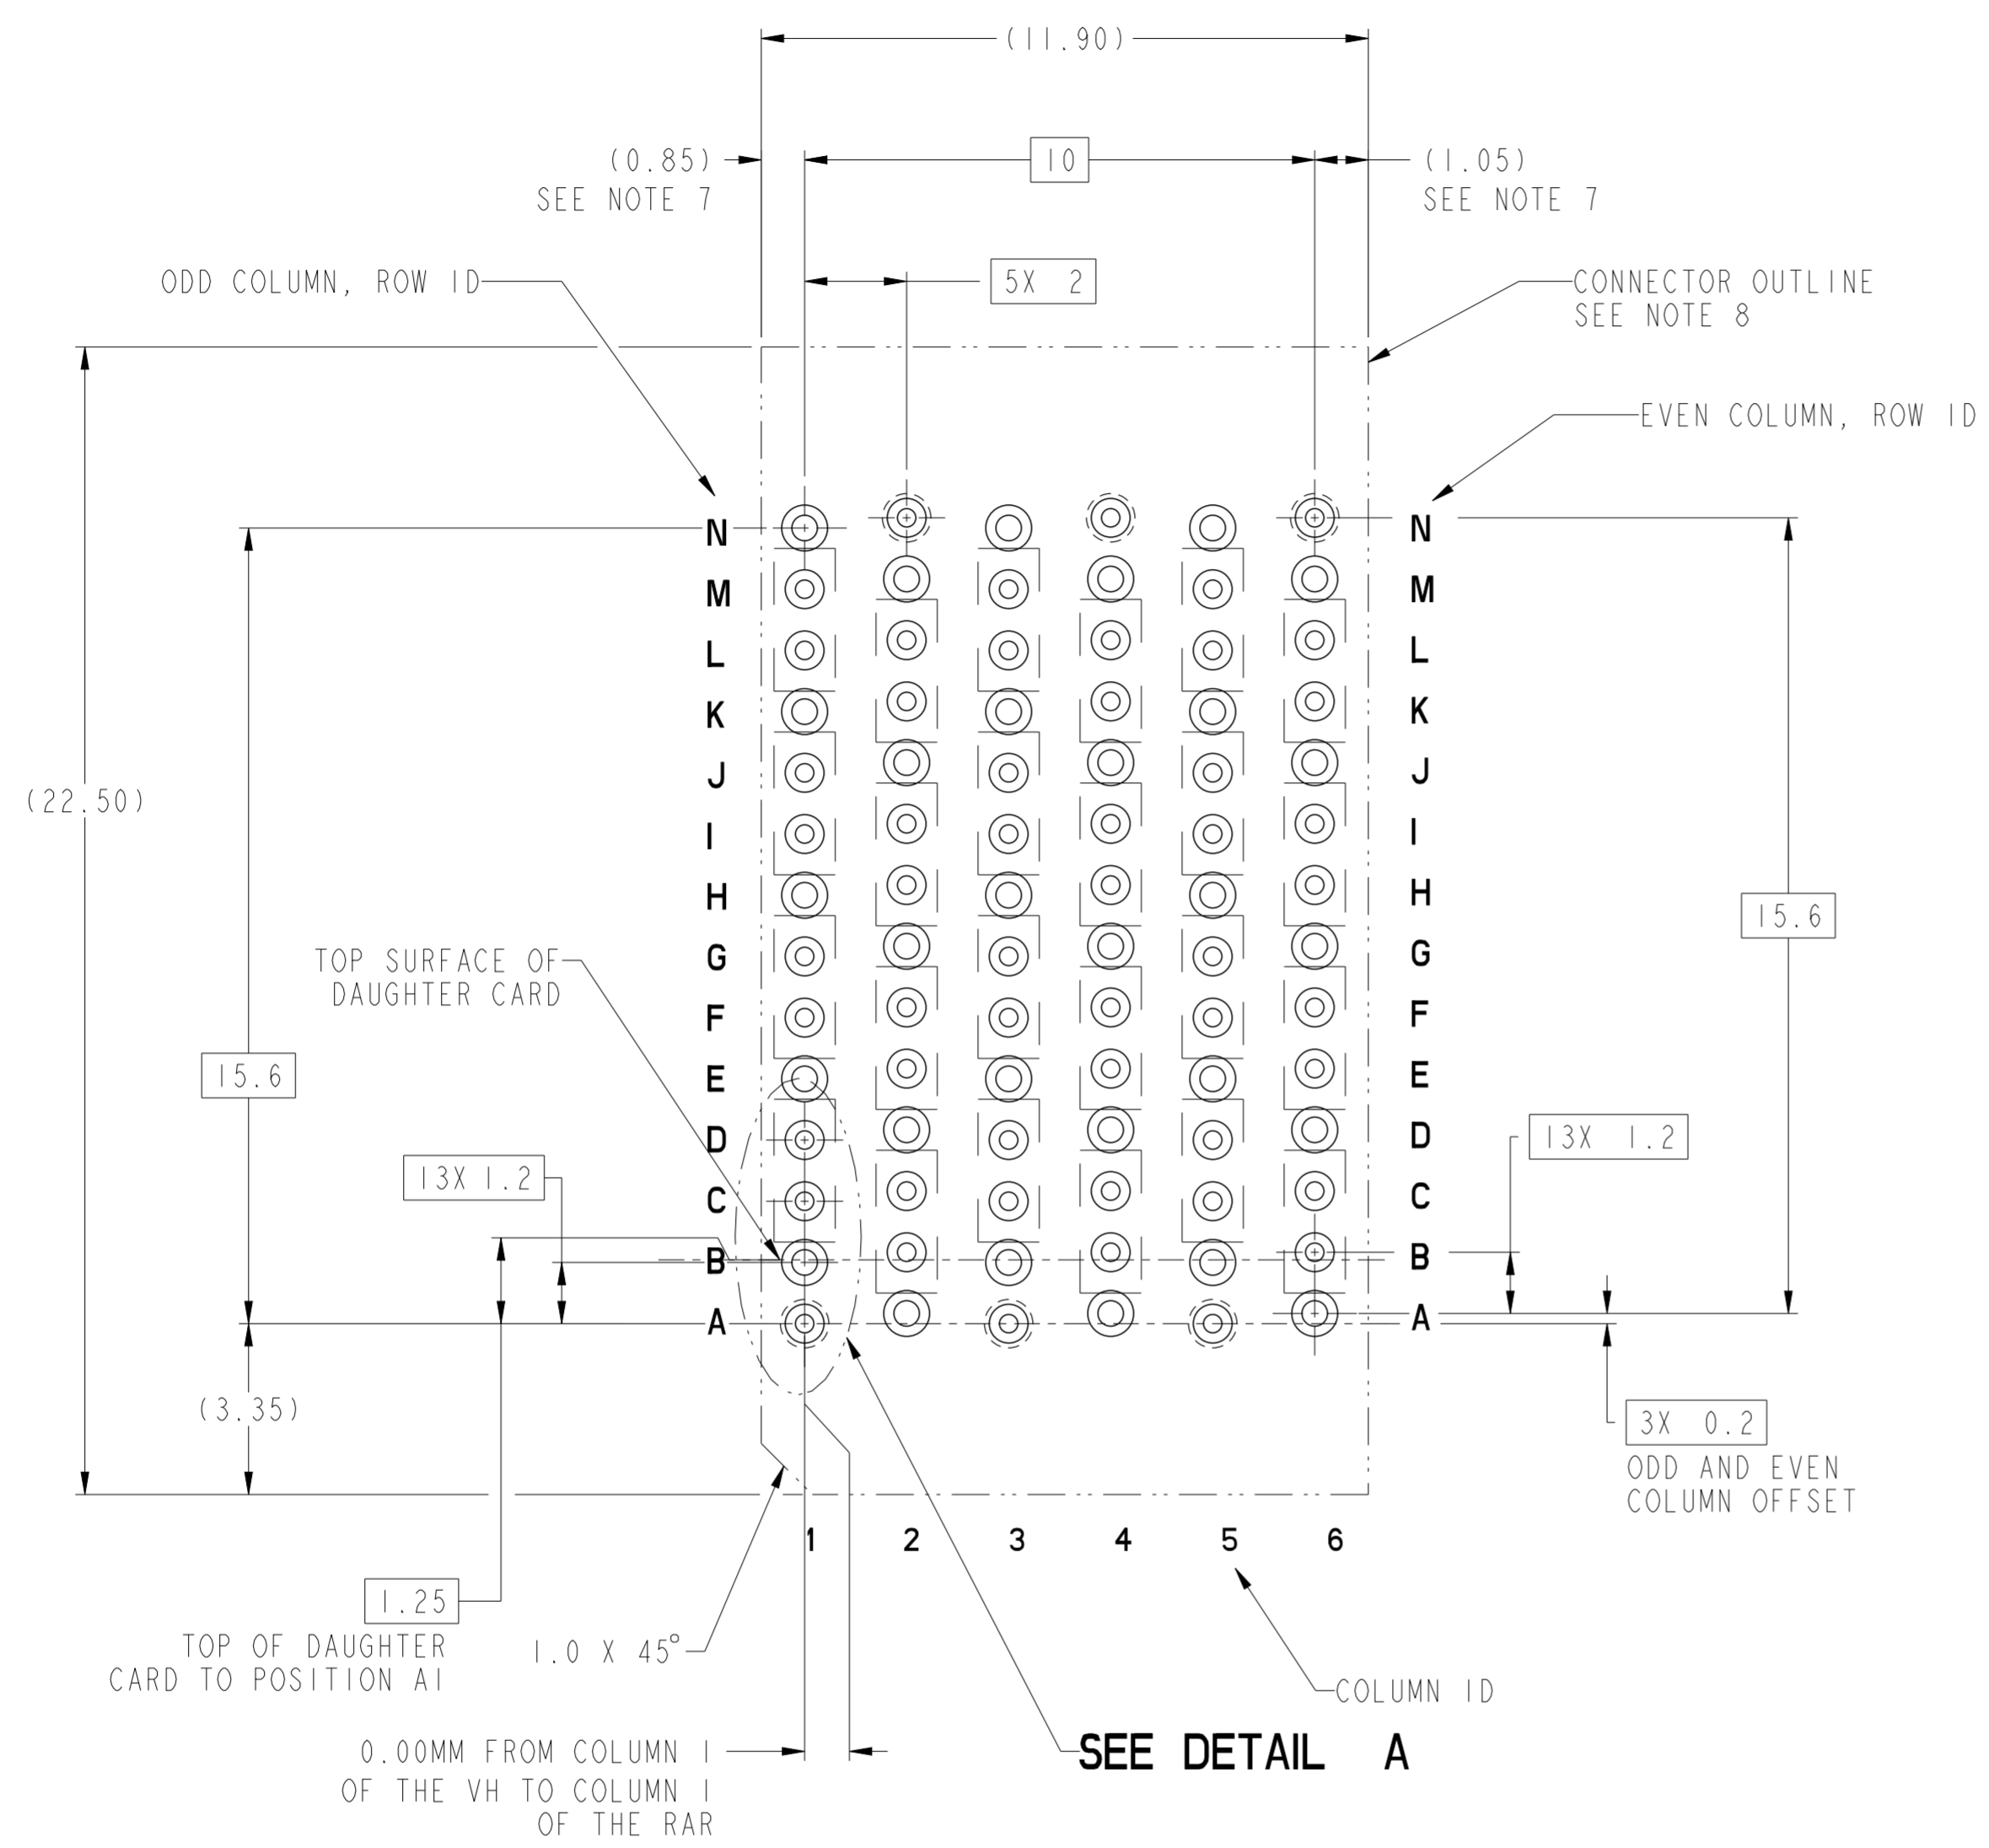

**RECOMMENDED PCB LAYOUT FOR
10127896-Y01YLF COMPONENT SIDE
SEE NOTES 7, 8, 9, & 11**

| | | | | | | | | | | | |
|---------------|---------------------------------------|------|--------------|------------|------------|-----------|---|--------------------|-----------|------------------------|---------------|
| spec ref | SEE NOTES | dr | Heaven Cen | 2013/1/12 | projection | MM | size | A2 | scale | 3:1 | |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | eng | Peng-Bing Fu | 2020/08/13 | | | ecn no | ELX-DG-37989-1 | rel level | Released | |
| ASME Y14.5M | | chr | - | apppr | | | | | | | Heaven Cen |
| surface | linear | 0.X | ±.3 | | title | | ExaMAX VERTICAL HEADER ASSY 4 PR, 84 POS, 6 IMLA | dwg no 10127896 | rev B | | |
| | | 0.XX | ±.10 | | cat. no. | SEE TABLE | | | | Product - Customer Drw | sheet 2 of 11 |
| | angular | 0° | ±° | | | | | | | | |

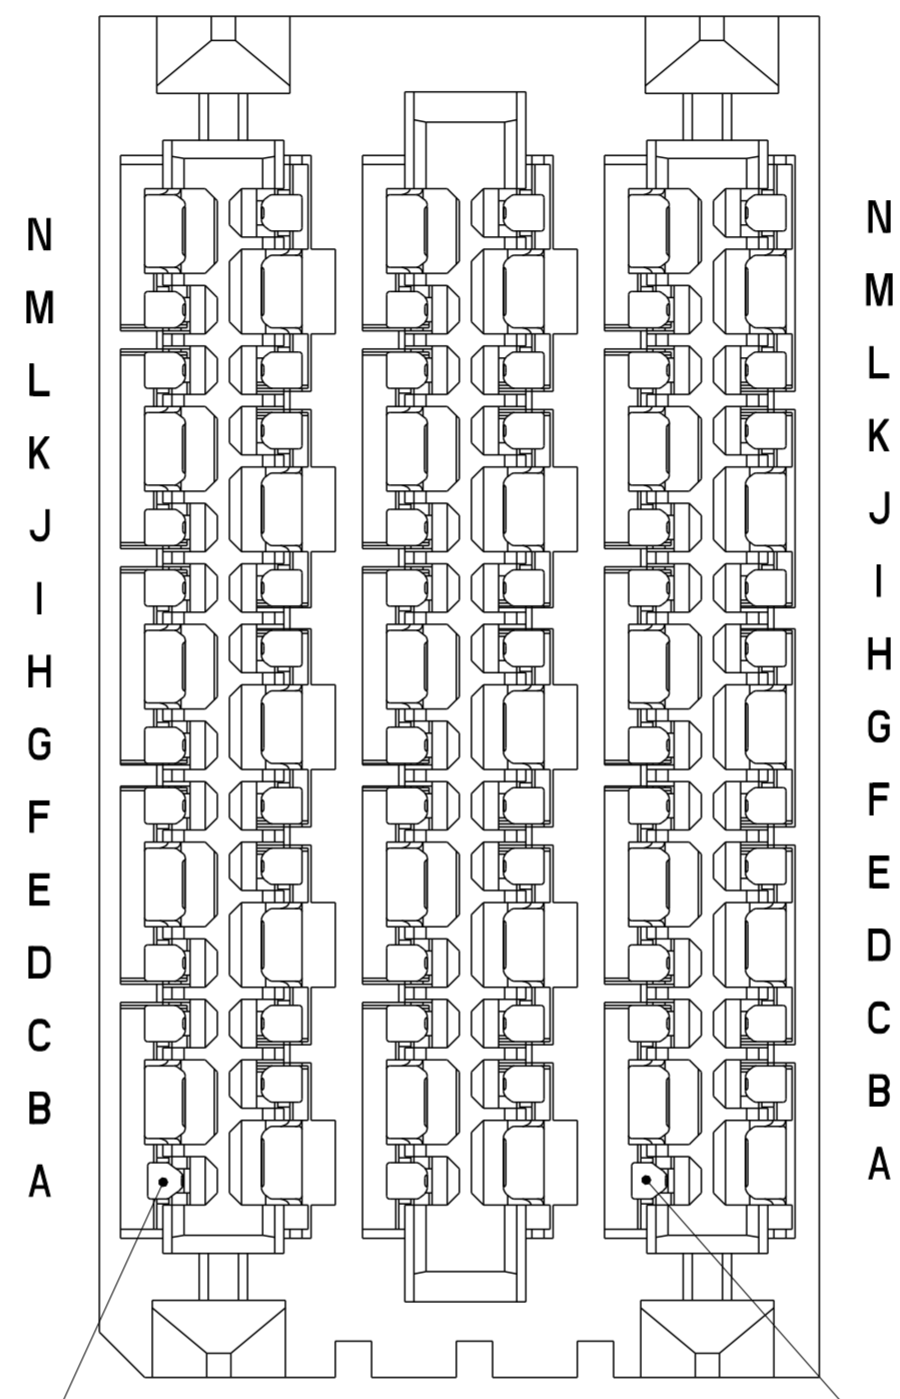

ADVANCED MATE POSITION A1 SEE NOTE 13

ADVANCED MATE POSITION A5 SEE NOTE 13

10127896-201YLF
ADVANCED MATE CONNECTOR
 ADVANCED MATE POSITIONS ARE POSITIONS A1 AND A5 ONLY
 FOR ALL OTHER DIMENSIONS SEE SHEETS 1 & 2

**Amphenol
FCi**

© 2016 AFci


| | | | | | | | | | | | | | | | | | | | | | | |
|---------------------------------------|--|--------|-----------------------------|------------|------------|--------|----------|----------------|-------|-------|---------|----|----|------|------------|------------|----------------|--------|----------|-----------|------------------------|---------------|
| spec ref | SEE NOTES | dr | Heaven Cen | 2013/1/12 | projection | MM | size | A2 | scale | 6:1 | | | | | | | | | | | | |
| tolerance std | ASME Y14.5M | eng | Peng-Bing Fu | 2020/08/13 | | | ecn no | ELX-DG-37989-1 | | | | | | | | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | chr | - | rel level | | | Released | | | | | | | | | | | | | | | |
| surface | <table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±.050</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±°</td> </tr> </table> | linear | 0.X | ±.3 | | 0.XX | ±.10 | | 0.XXX | ±.050 | angular | 0° | ±° | appr | Heaven Cen | 2020/08/27 | product family | ExaMAX | cat. no. | SEE TABLE | Product - Customer Drw | sheet 3 of 11 |
| linear | 0.X | ±.3 | | | | | | | | | | | | | | | | | | | | |
| | 0.XX | ±.10 | | | | | | | | | | | | | | | | | | | | |
| | 0.XXX | ±.050 | | | | | | | | | | | | | | | | | | | | |
| angular | 0° | ±° | | | | | | | | | | | | | | | | | | | | |
| | | title | ExaMAX VERTICAL HEADER ASSY | | | div no | 10127896 | rev | B | | | | | | | | | | | | | |

PDS: Rev :B

STATUS:Released

Printed: Aug 27, 2020

SHORT DETECT
POSITION N2
SEE NOTE 14

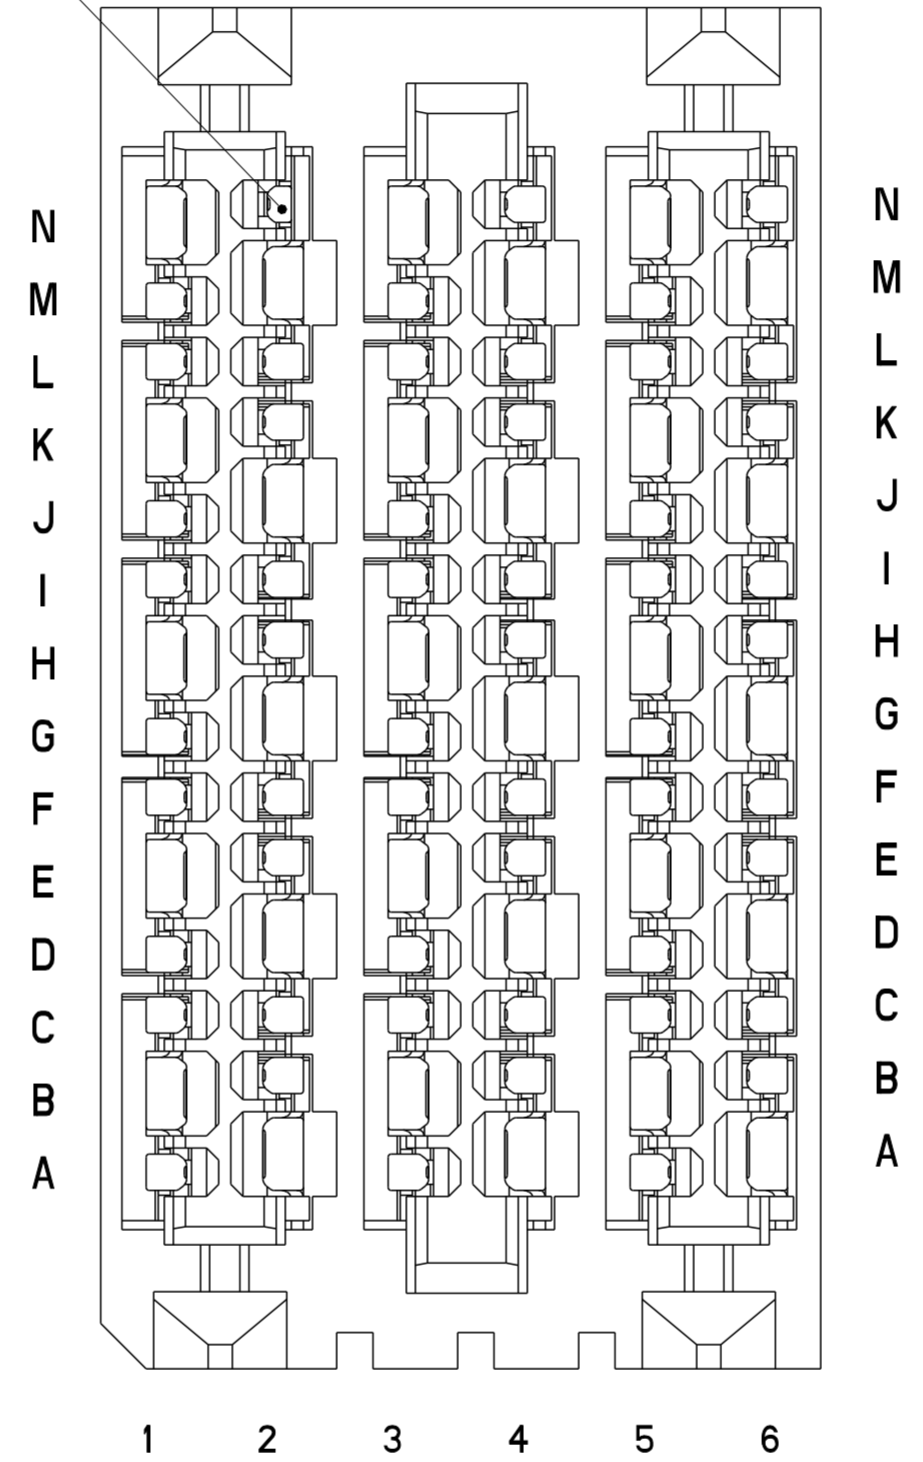


10127896-30Y1LF
SHORT DETECT CONNECTOR
 SHORT DETECT POSITION IS N2 ONLY
 FOR ALL OTHER DIMENSIONS SEE SHEETS 1 & 2

**Amphenol
FCi**

© 2016 AFci

| | | | | | | | | | | | | | | | | | | | | | | |
|---------------------------------------|--|-------------------------|--------------|----------------------|-----------------------------|------------------------|---------------|----------------|----------|-------|---------|----|----|------|------------|------------|----------------|--------|-----------|----------|--|--|
| spec ref | SEE NOTES | dr | Heaven Cen | 2013/11/12 | projection | MM | size | A2 | scale | 6:1 | | | | | | | | | | | | |
| tolerance std | ASME Y14.5M | eng | Peng-Bing Fu | 2020/08/13 | | | ecn no | ELX-DG-37989-1 | | | | | | | | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | chr | - | rel level | | | Released | | | | | | | | | | | | | | | |
| surface | <table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±.050</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±°</td> </tr> </table> | linear | 0.X | ±.3 | | 0.XX | ±.10 | | 0.XXX | ±.050 | angular | 0° | ±° | appr | Heaven Cen | 2020/08/27 | product family | ExaMAX | rel level | Released | | |
| linear | 0.X | ±.3 | | | | | | | | | | | | | | | | | | | | |
| | 0.XX | ±.10 | | | | | | | | | | | | | | | | | | | | |
| | 0.XXX | ±.050 | | | | | | | | | | | | | | | | | | | | |
| angular | 0° | ±° | | | | | | | | | | | | | | | | | | | | |
| | | Amphenol FCi | | title | ExaMAX VERTICAL HEADER ASSY | | | dwg no | 10127896 | | | | | | | | | | | | | |
| | | | | 4 PR, 84 POS, 6 IMLA | | | rev | B | | | | | | | | | | | | | | |
| | | | | cat. no. | SEE TABLE | Product - Customer Drw | sheet 4 of 11 | | | | | | | | | | | | | | | |

SHORT DETECT
POSITION N2
SEE NOTE 15

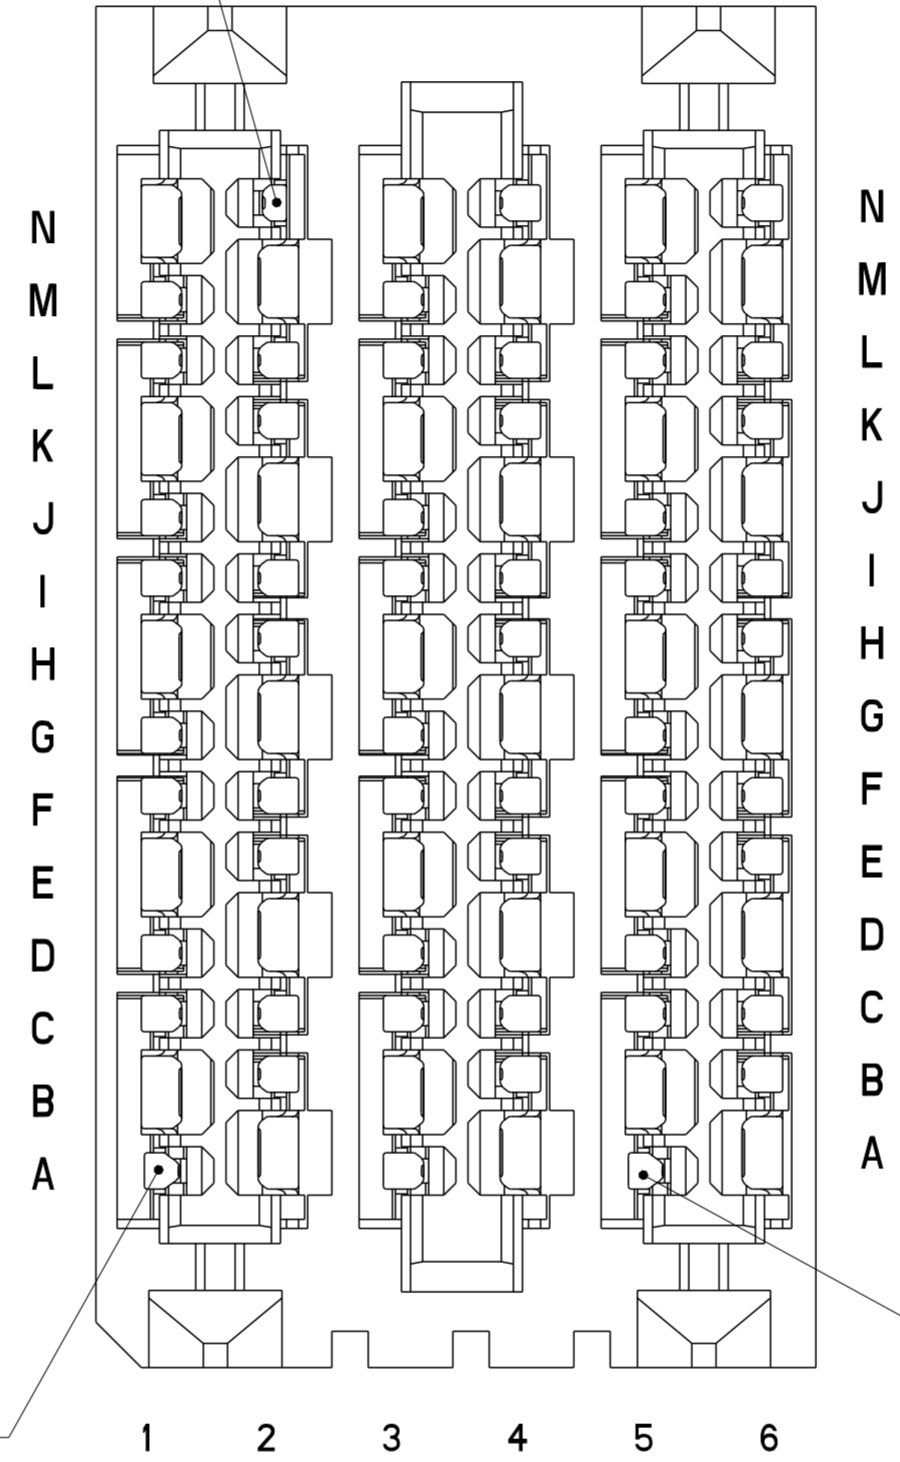

ADVANCED MATE
POSITION A1
SEE NOTE 15

ADVANCED MATE
POSITION A5
SEE NOTE 15

10127896-401YLF
ADVANCED MATE/SHORT DETECT CONNECTOR
ADVANCED MATE POSITIONS ARE POSITIONS A1 AND A5 ONLY
SHORT DETECT POSITION IS N2 ONLY
FOR ALL OTHER DIMENSIONS SEE SHEETS 1 & 2

Amphenol
FCi

© 2016 APCI

| | | | | | | | | | | |
|---------------|---------------------------------------|---------|--------------|------------|------------|--|------------------------|----------------|----------------|--------|
| spec ref | SEE NOTES | dr | Heaven Cen | 2013/11/12 | projection | MM | size | A2 | scale | 1:1 |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | eng | Peng-Bing Fu | 2020/08/13 | | | ecn no | ELX-DG-37989-1 | | |
| ASME Y14.5M | | chr | - | appr | | | Heaven Cen | 2020/08/27 | product family | ExaMAX |
| surface | - | linear | 0.X | ±.3 | | title ExaMAX VERTICAL HEADER ASSY 4 PR, 84 POS, 6 IMLA | dwg no 10127896 | rev B | | |
| | | | 0.XX | ±.10 | | | | | | |
| | | | 0.XXX | ±.050 | | | | | | |
| | | angular | 0° | ±° | cat. no. | SEE TABLE | Product - Customer Drw | sheet 5 of 11 | | |

A

B

C

D

E

F

A



B

C

D

E

F

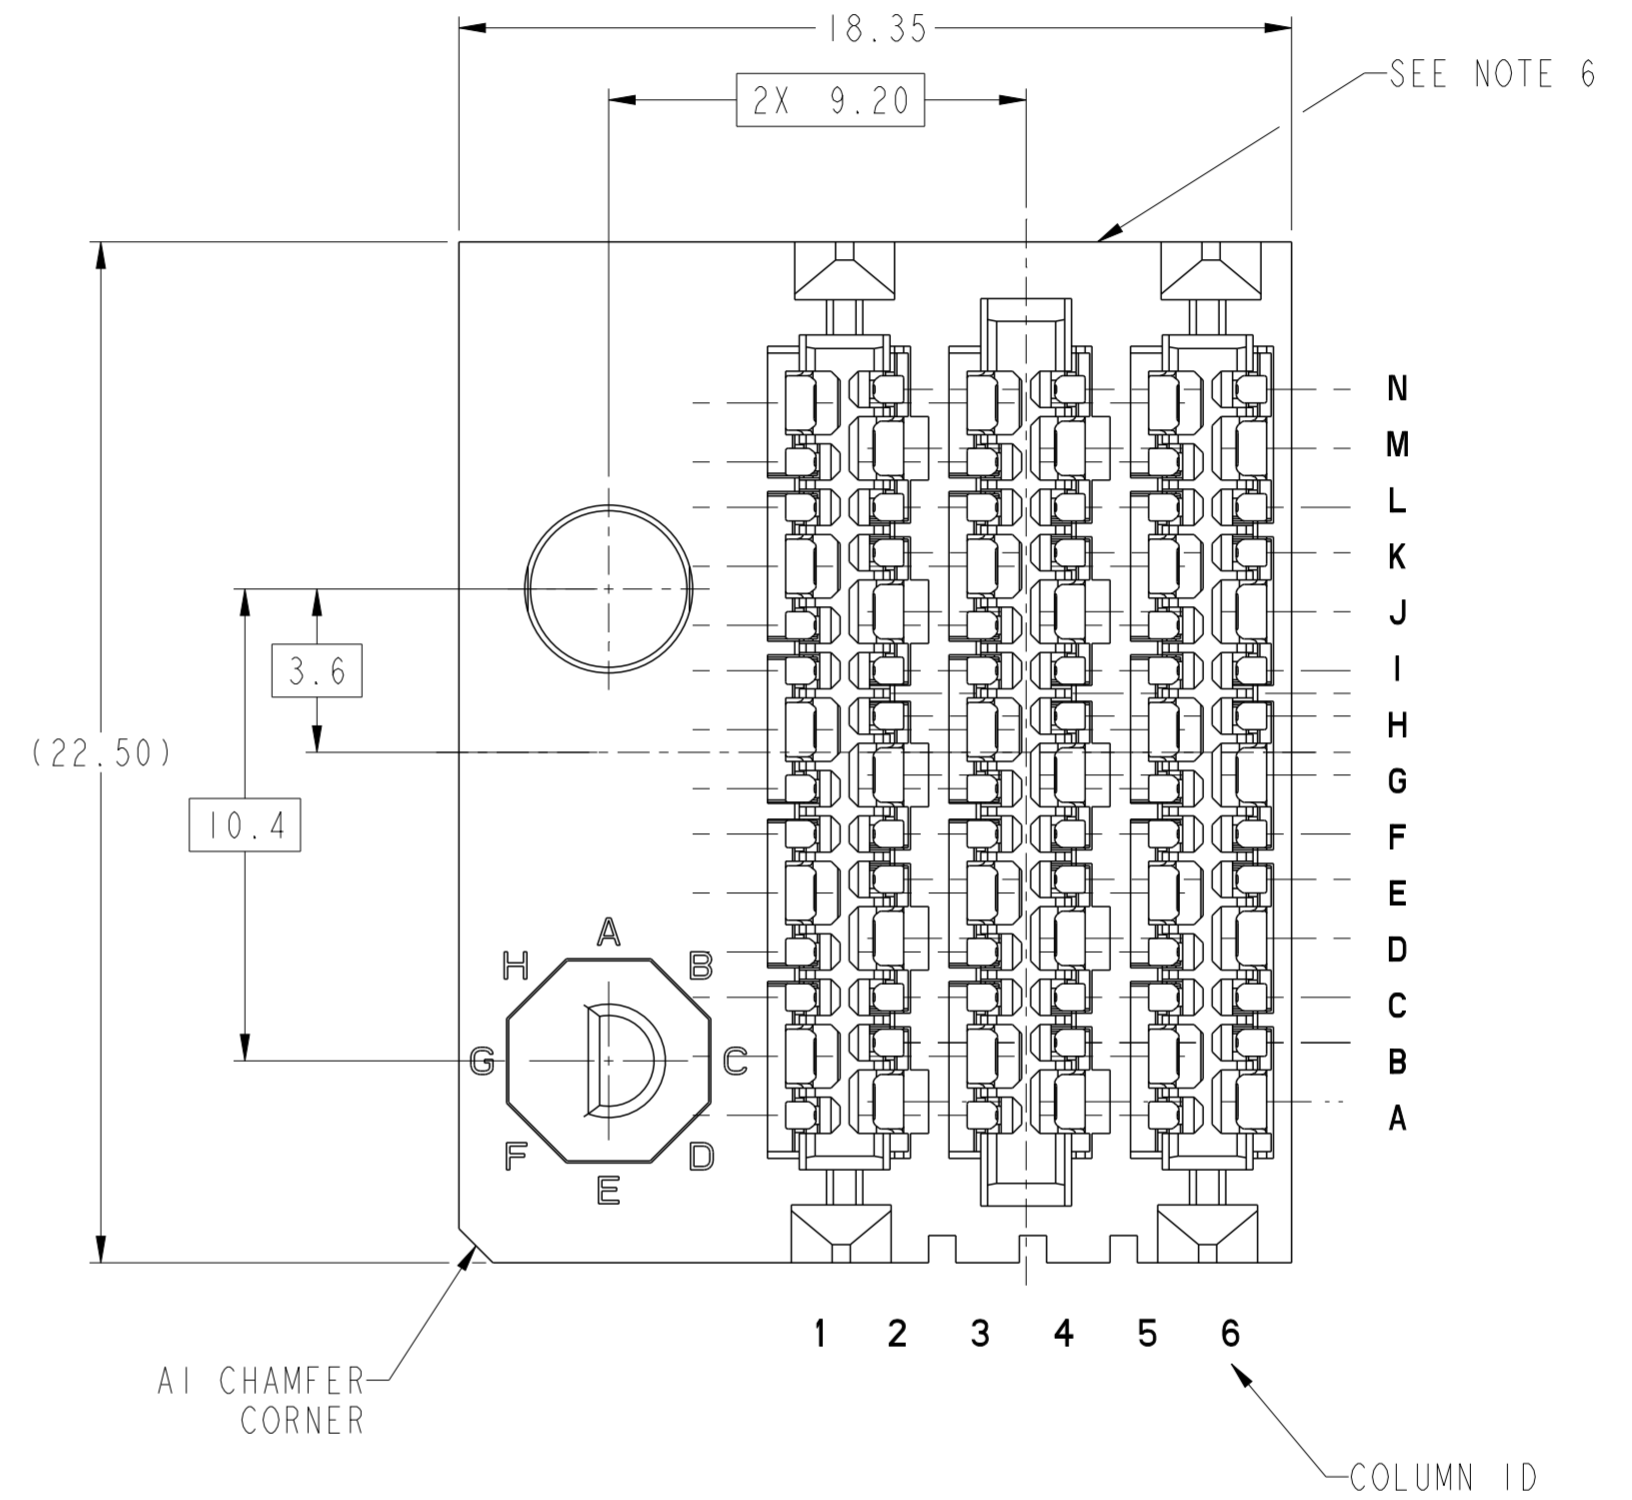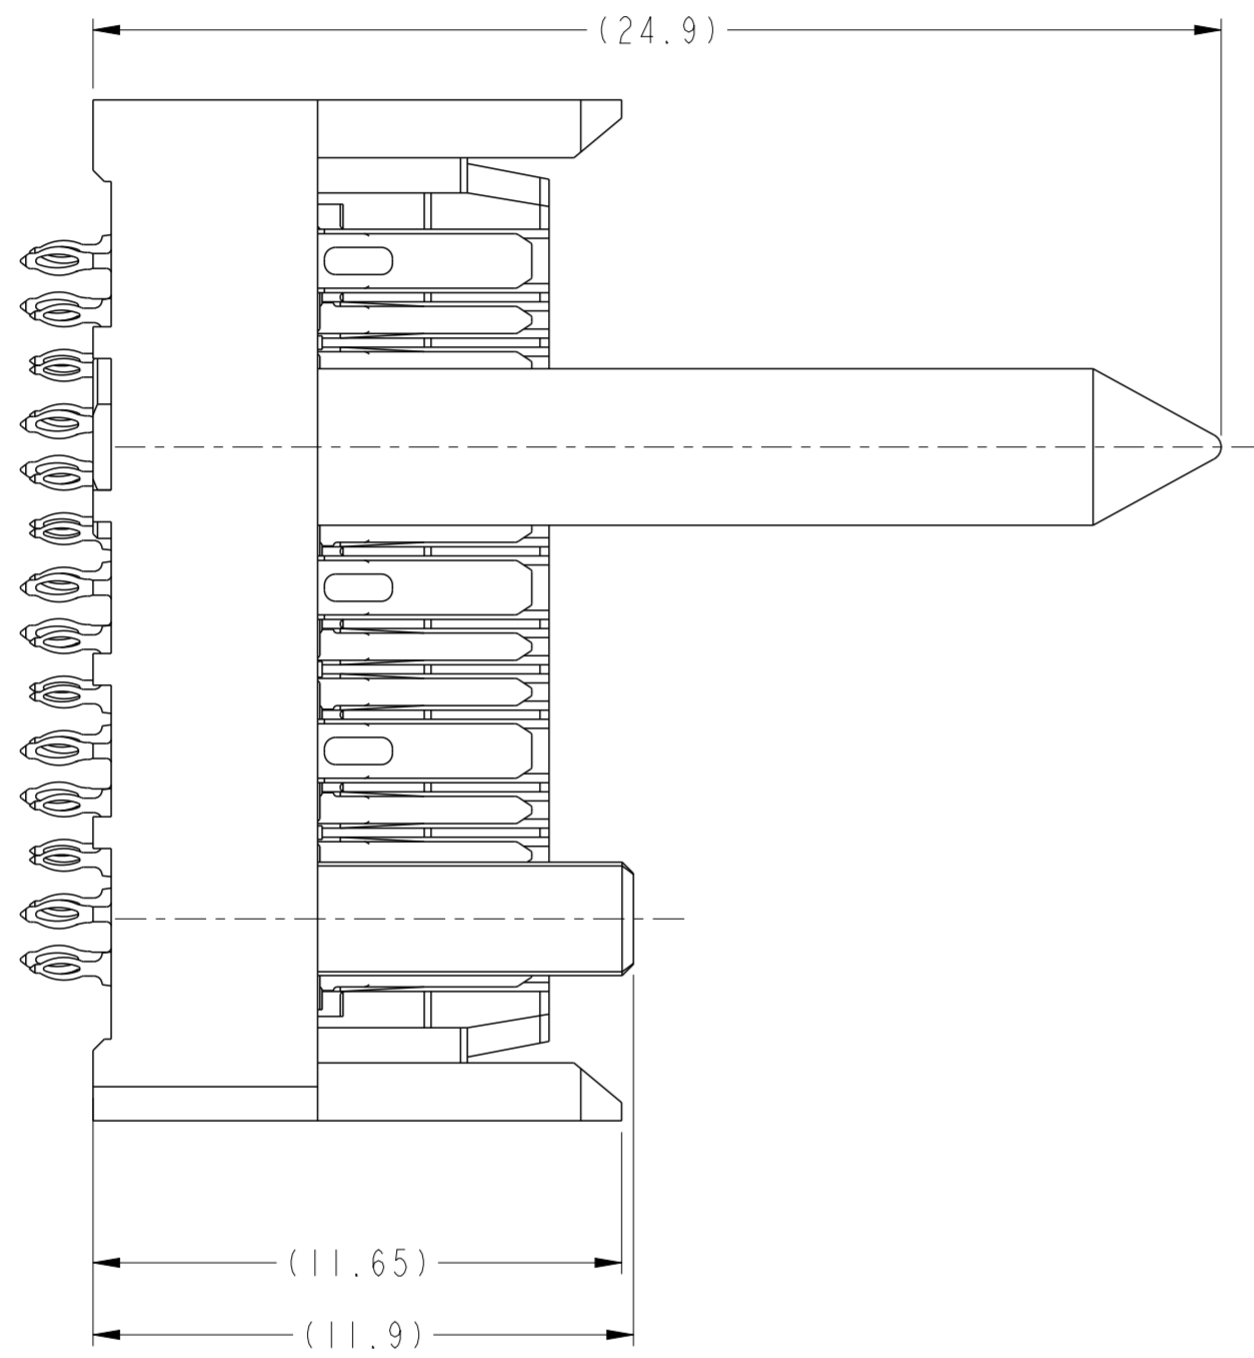

10127896-Y1AYLF THRU -Y1JYLF
 RIGHT GUIDANCE CONNECTOR (SEE NOTE 17)
 FOR ALL OTHER DIMENSIONS SEE SHEET 1

Amphenol
FCi



© 2016 AFci

| | | | | | | | | | | | | | | | | | | | |
|---------------|--|----------|--------------|------------|------------------------|------|---------------|----------------|-----------|----------|----------------|--------|----|--|--|--|--|--------------------|----------|
| spec ref | SEE NOTES | dr | Heaven Cen | 2013/11/12 | projection | MM | size | A2 | scale | 6:1 | | | | | | | | | |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | eng | Peng-Bing Fu | 2020/08/13 | | | ecn no | ELX-DG-37989-1 | rel level | Released | | | | | | | | | |
| ASME Y14.5M | | chr | - | app | | | Heaven Cen | 2020/08/27 | | | product family | ExaMAX | | | | | | | |
| surface | <table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±.050</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±°</td> </tr> </table> | linear | 0.X | ±.3 | | 0.XX | ±.10 | | 0.XXX | ±.050 | angular | 0° | ±° | Amphenol FCI | | title ExaMAX VERTICAL HEADER ASSY 4 PR, 84 POS, 6 IMLA | | dwg no 10127896 | rev B |
| linear | 0.X | ±.3 | | | | | | | | | | | | | | | | | |
| | 0.XX | ±.10 | | | | | | | | | | | | | | | | | |
| | 0.XXX | ±.050 | | | | | | | | | | | | | | | | | |
| angular | 0° | ±° | | | | | | | | | | | | | | | | | |
| | | cat. no. | | SEE TABLE | Product - Customer Drw | | sheet 6 of 11 | | | | | | | | | | | | |

PDS: Rev :B



STATUS:Released

Printed: Aug 27, 2020

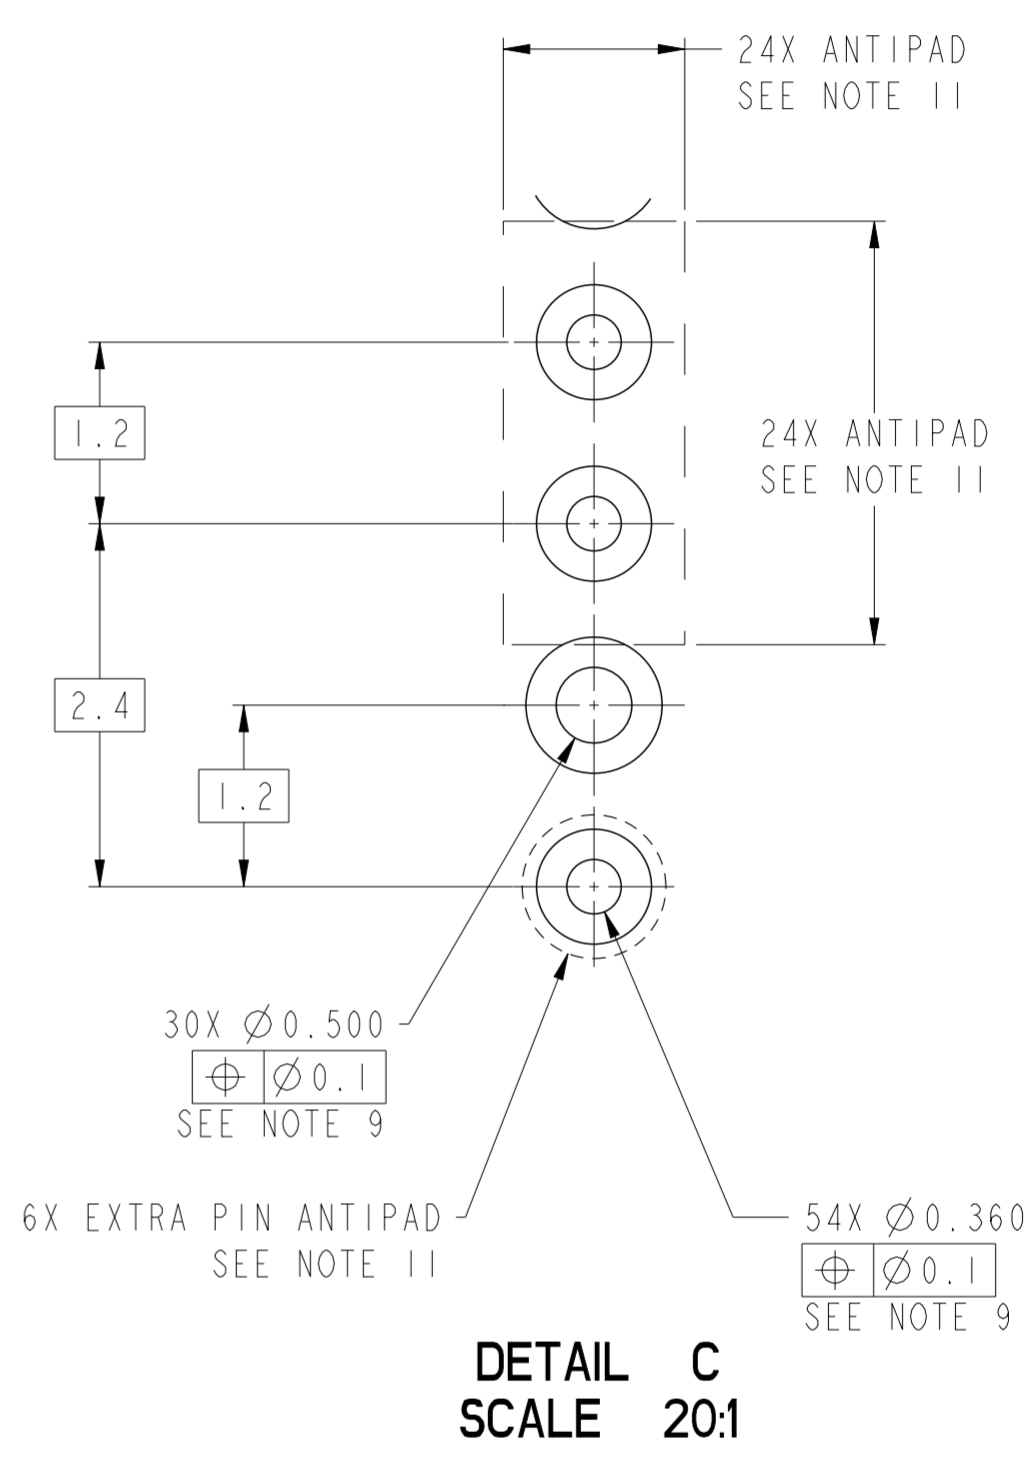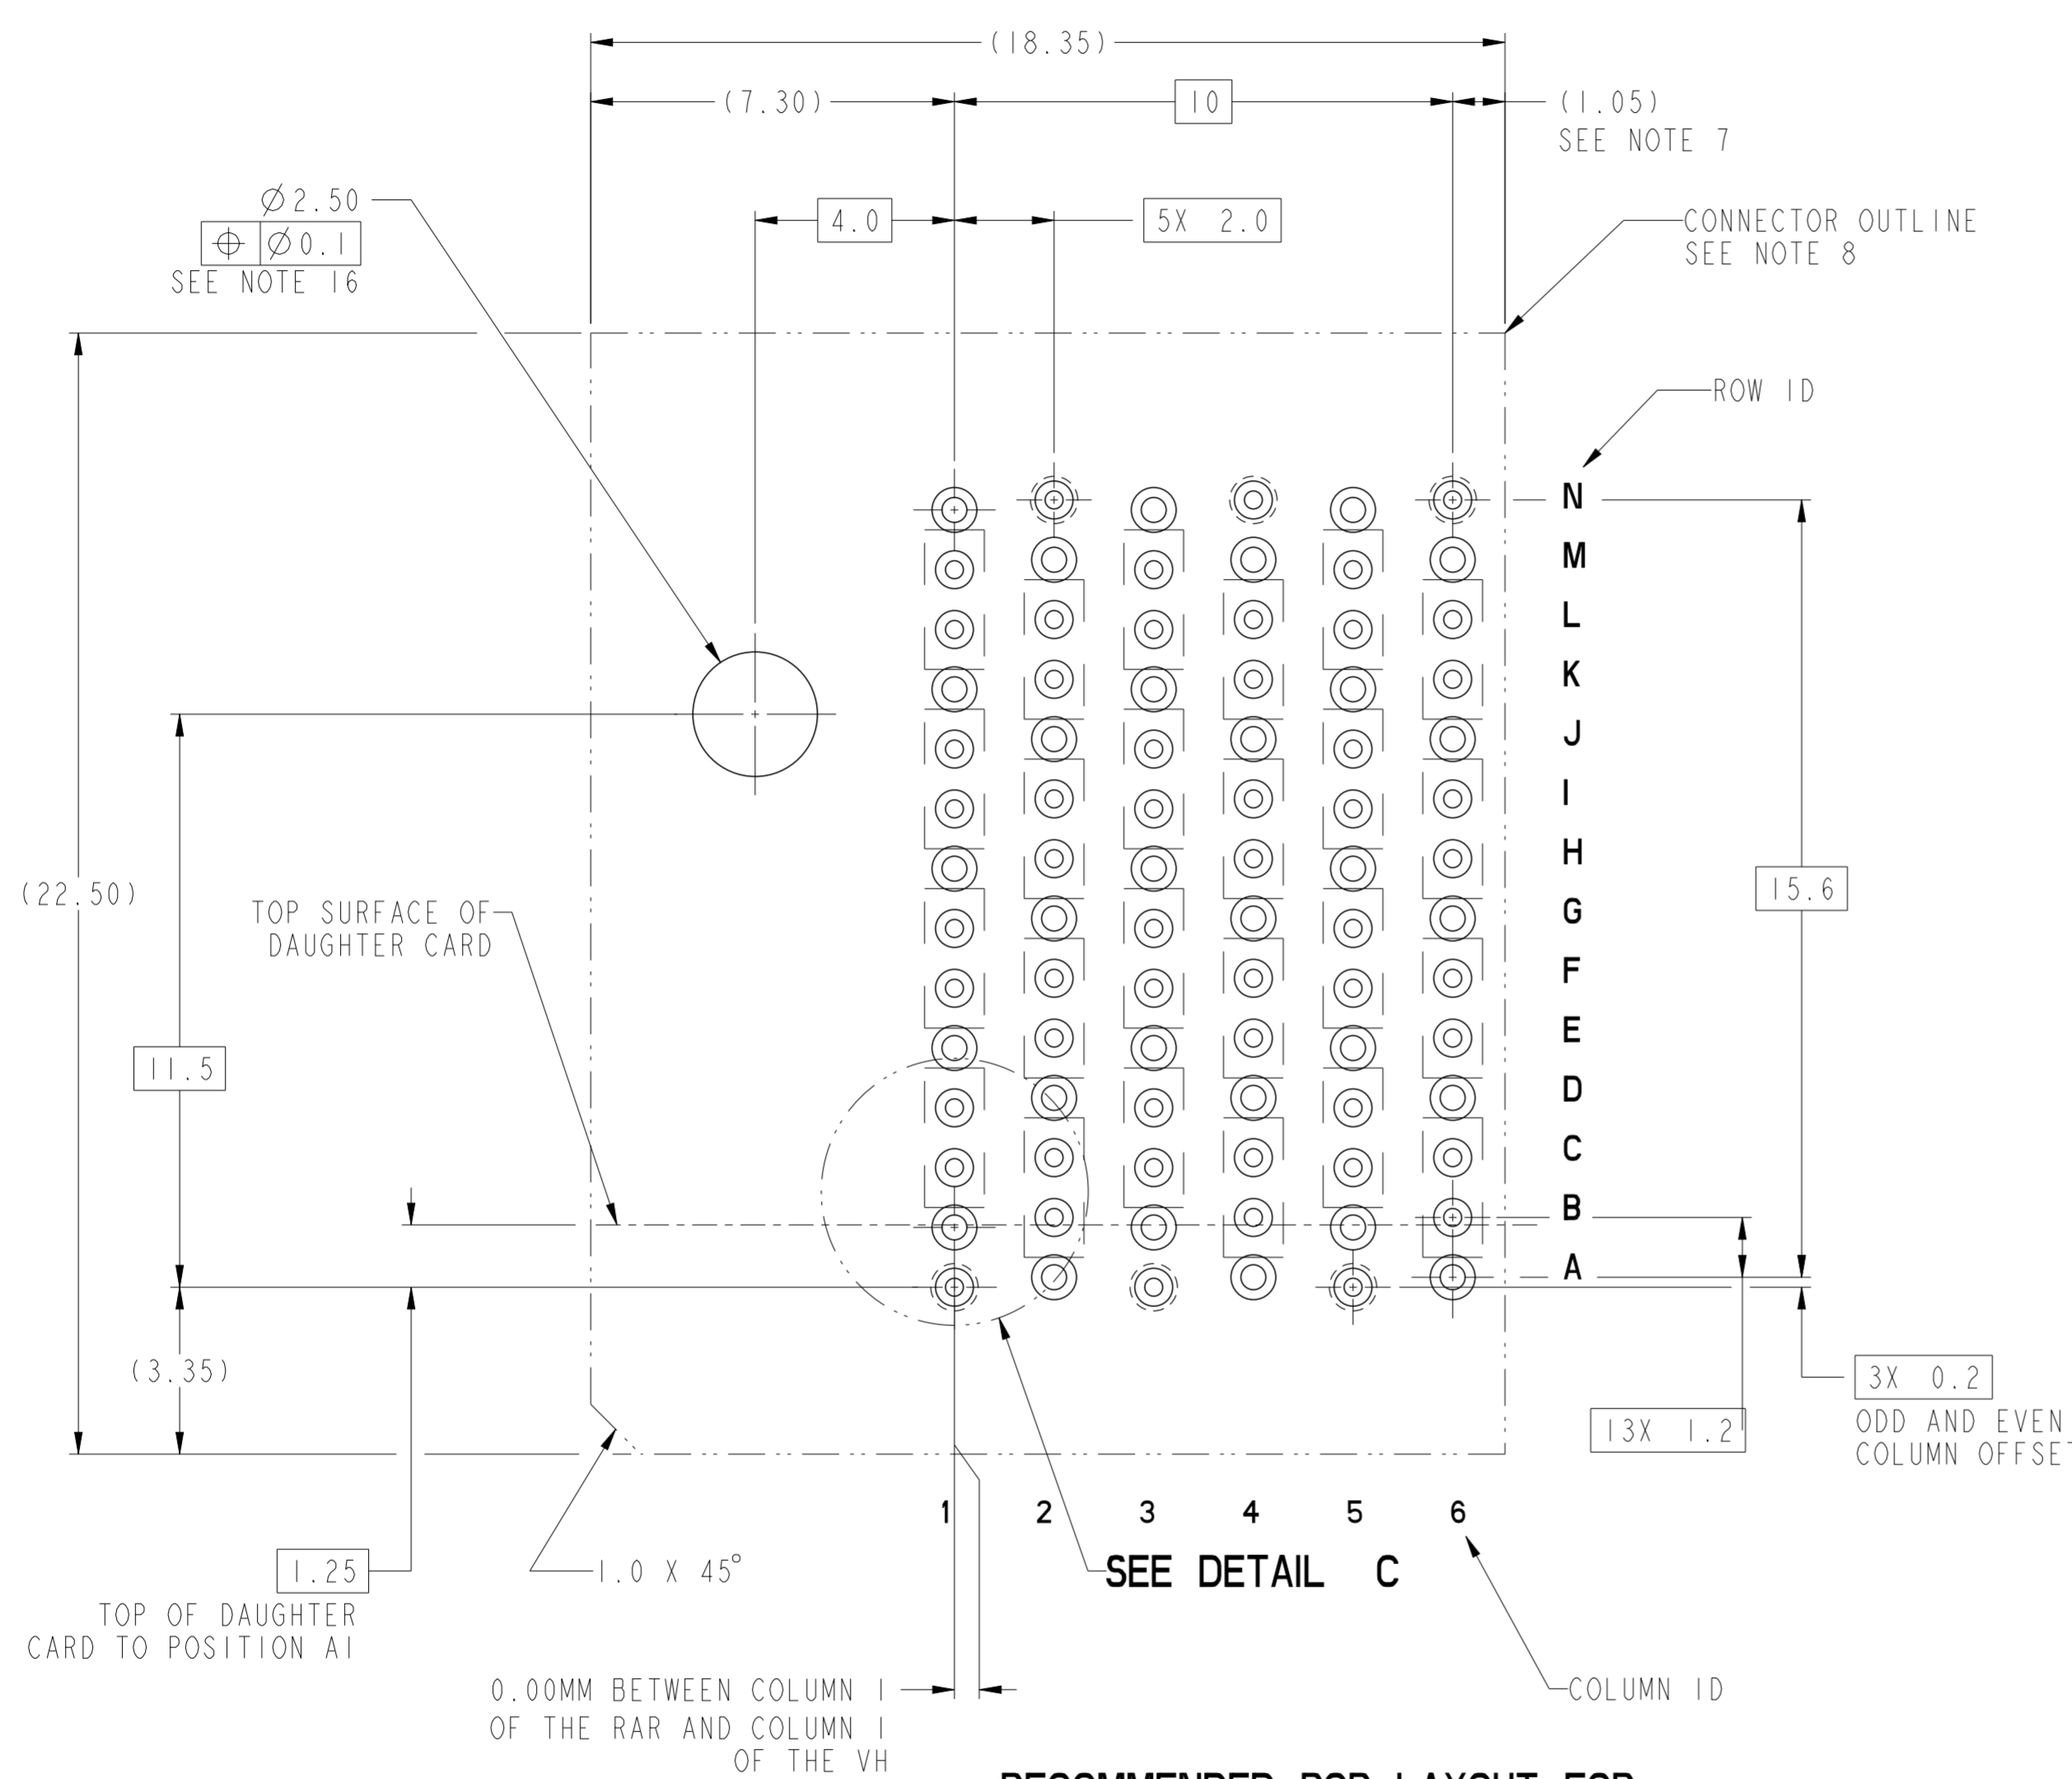



**RECOMMENDED PCB LAYOUT FOR
10127896-Y1YYLF w/RIGHT GUIDANCE
COMPONENT SIDE
SEE NOTES 7, 8, 9, 11 & 16**

| | | | | | | | | | | | | |
|---------------|---------------------------------------|------|--------------|------------|----------------------|----|----------------|-----------------------------|------------------------|---------------|-----|---|
| spec ref | SEE NOTES | dr | Heaven Cen | 2013/11/12 | projection | MM | size | A2 | scale | 2:1 | | |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | eng | Peng-Bing Fu | 2020/08/13 | | | ecn no | ELX-DG-37989-1 | rel level | Released | | |
| ASME Y14.5M | | chr | - | 2020/08/27 | | | product family | ExaMAX | | | | |
| surface | linear | 0.X | ±.3 | | Amphenol FCI | | title | ExaMAX VERTICAL HEADER ASSY | dwg no | 10127896 | rev | B |
| | | 0.XX | ±.10 | | 4 PR, 84 POS, 6 IMLA | | cat. no. | SEE TABLE | Product - Customer Drw | sheet 7 of 11 | | |
| | angular | 0° | ±° | | | | | | | | | |

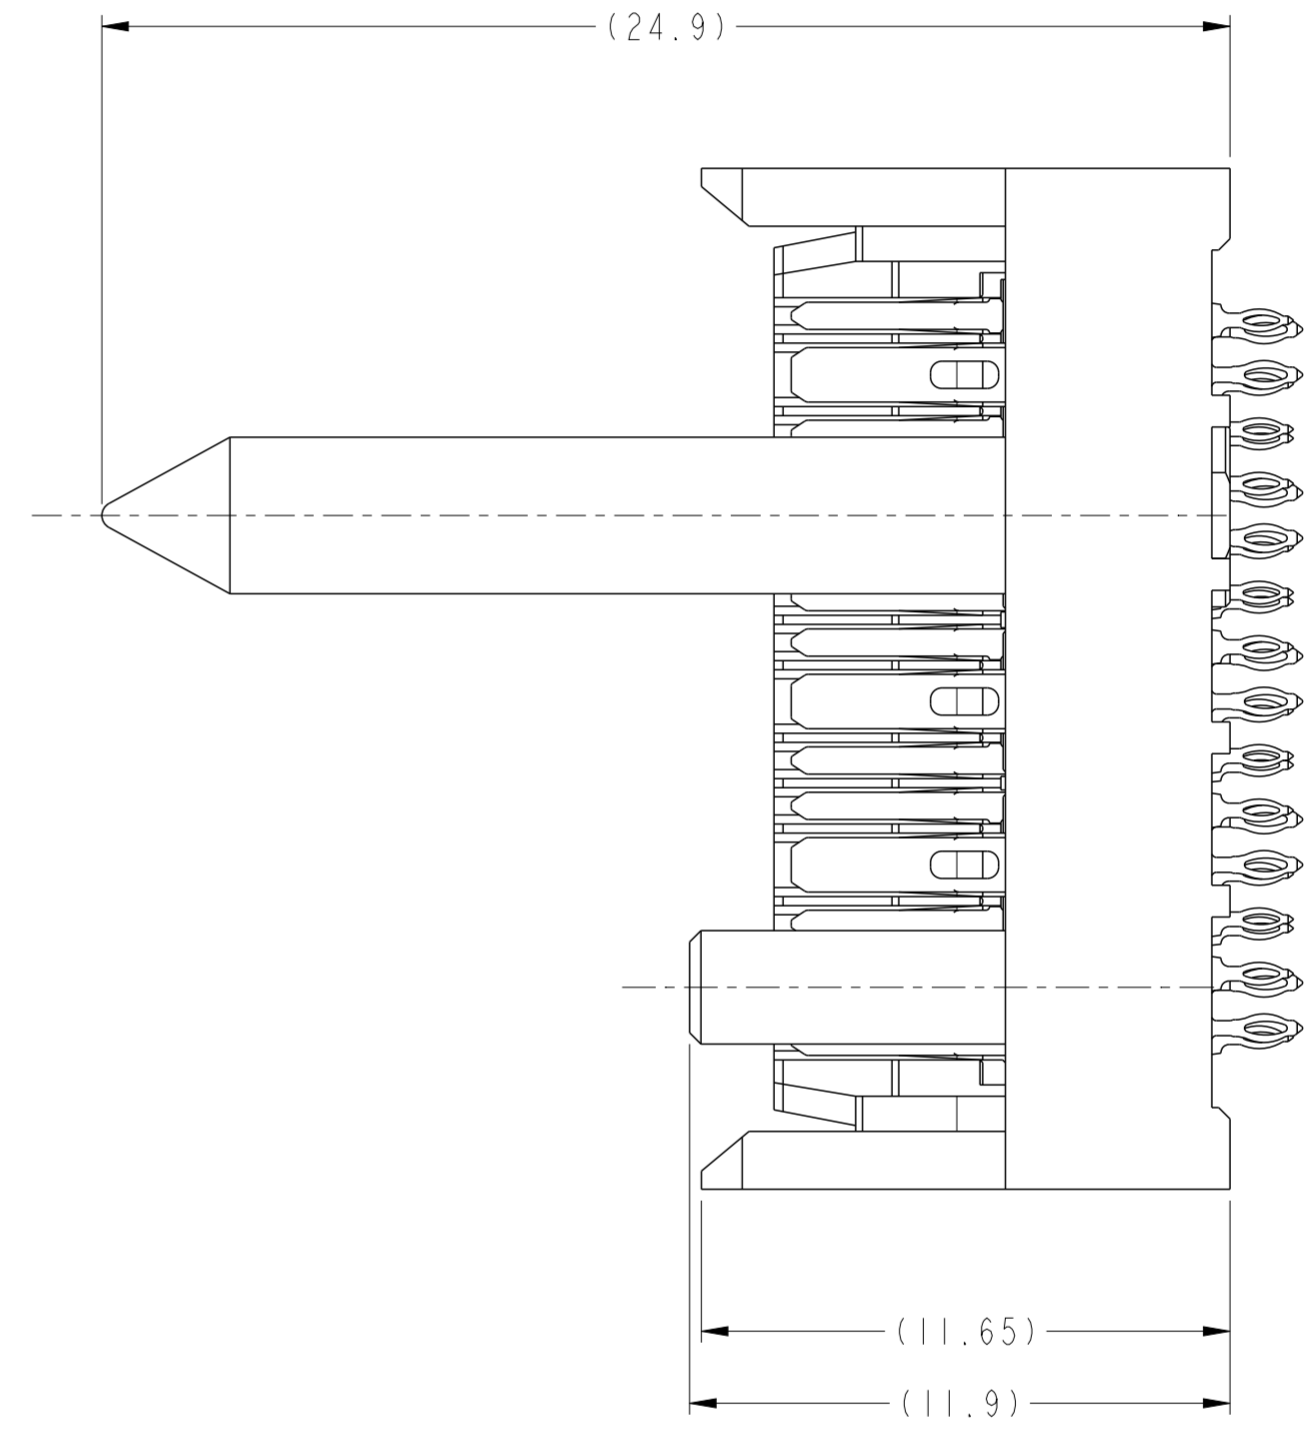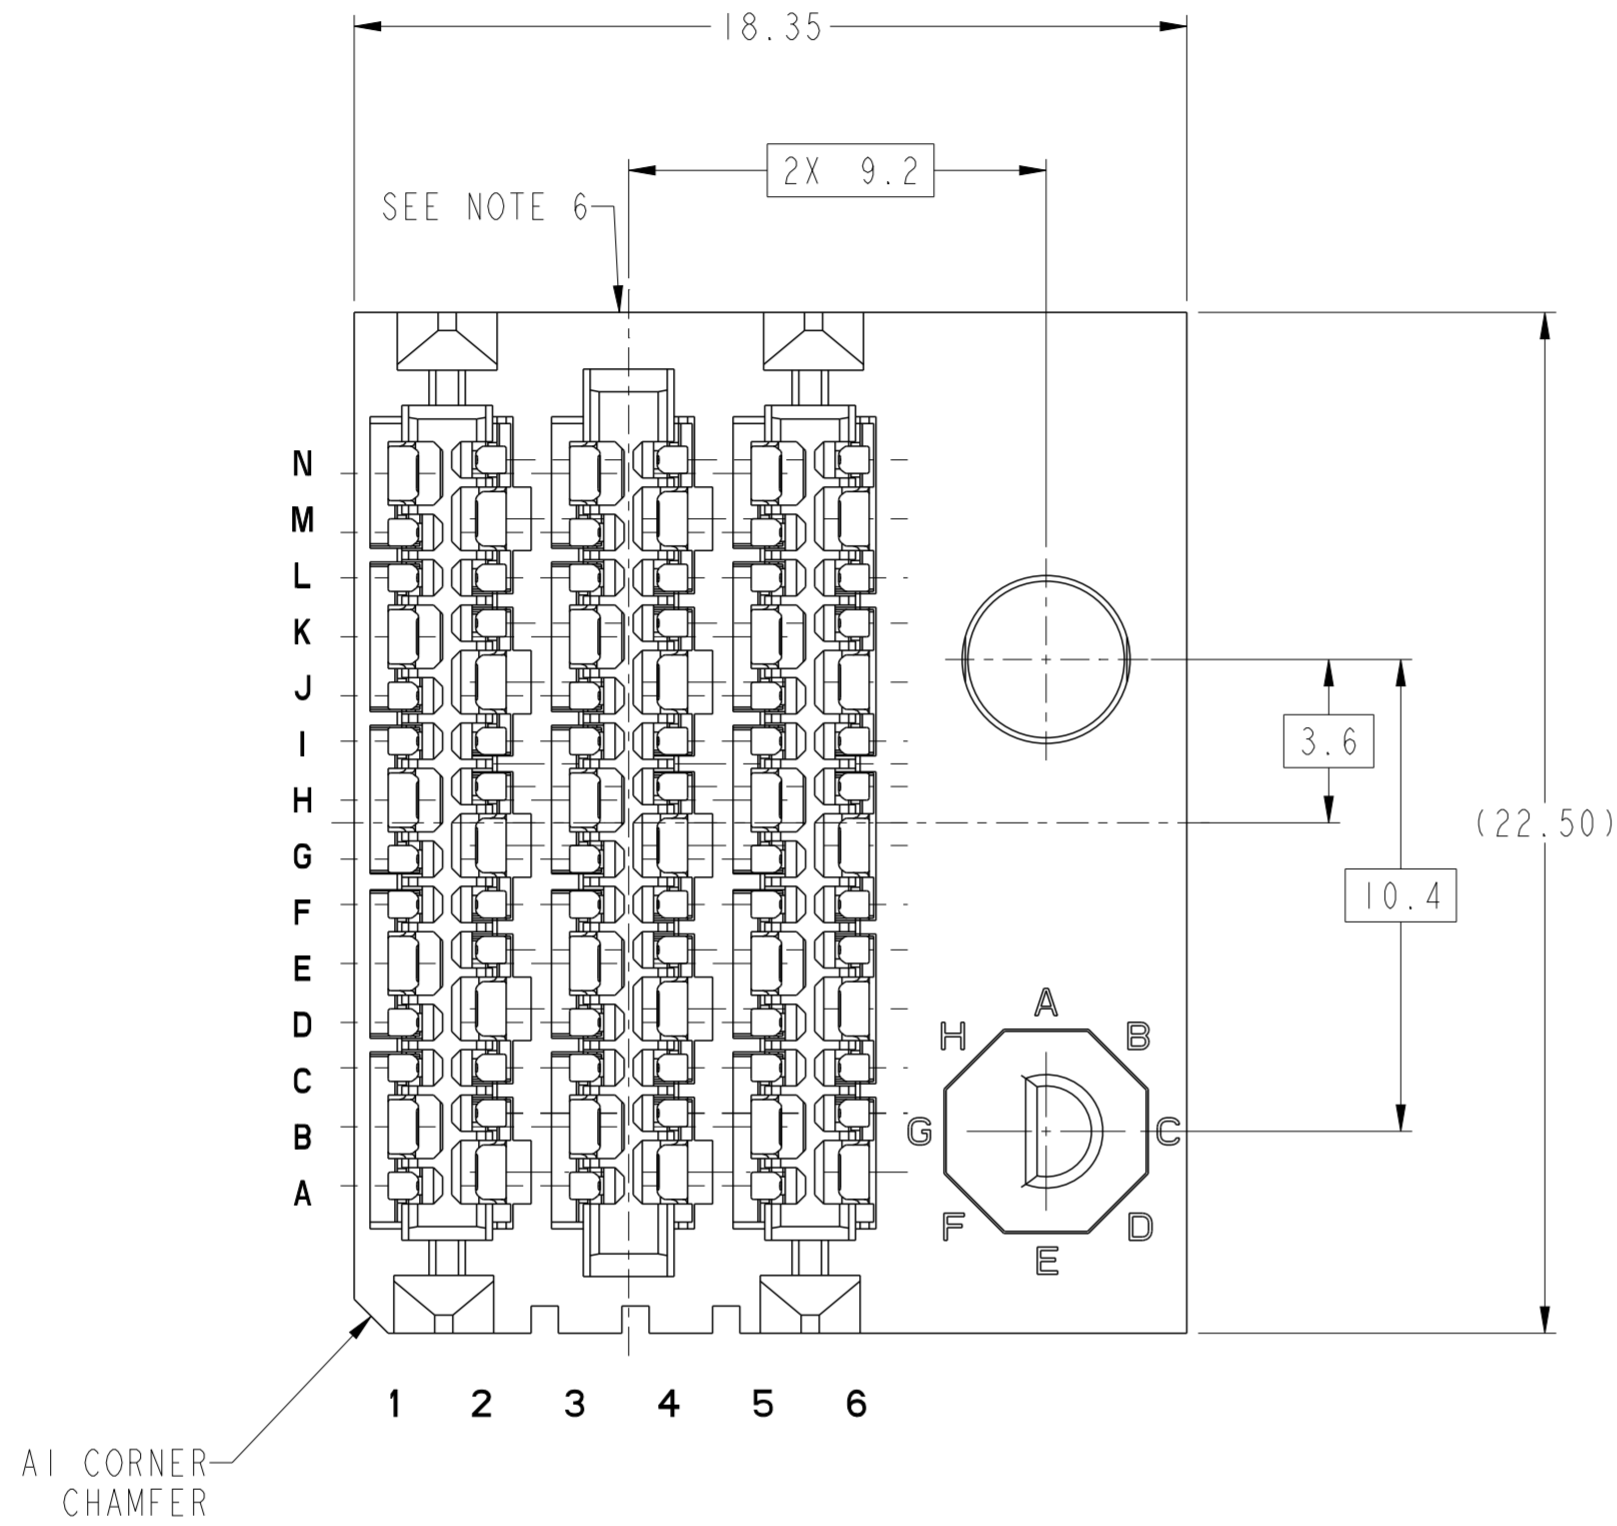

10127896-Y2AYLF THRU -Y2JYLF
LEFT GUIDANCE CONNECTOR (SEE NOTE 17)
FOR ALL OTHER DIMENSIONS SEE SHEET 1

| | | | | | | | | | | | | | | | | | | | |
|---------------|--|----------|--------------|------------|------------------------|------|---------------|----------------|-----------|----------|------------|------------|----------------|--------|--|--|--|--------------------|----------|
| spec ref | SEE NOTES | dr | Heaven Cen | 2013/11/12 | projection | MM | size | A2 | scale | 6:1 | | | | | | | | | |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | eng | Peng-Bing Fu | 2020/08/13 | | | ecn no | ELX-DG-37989-1 | rel level | Released | | | | | | | | | |
| ASME Y14.5M | | chr | - | app | | | | | | | Heaven Cen | 2020/08/27 | product family | ExaMAX | | | | | |
| surface | <table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±.050</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±°</td> </tr> </table> | linear | 0.X | ±.3 | | 0.XX | ±.10 | | 0.XXX | ±.050 | angular | 0° | ±° | | | title ExaMAX VERTICAL HEADER ASSY 4 PR, 84 POS, 6 IMLA | | dwg no 10127896 | rev B |
| linear | 0.X | ±.3 | | | | | | | | | | | | | | | | | |
| | 0.XX | ±.10 | | | | | | | | | | | | | | | | | |
| | 0.XXX | ±.050 | | | | | | | | | | | | | | | | | |
| angular | 0° | ±° | | | | | | | | | | | | | | | | | |
| | | cat. no. | | SEE TABLE | Product - Customer Drw | | sheet 8 of 11 | | | | | | | | | | | | |


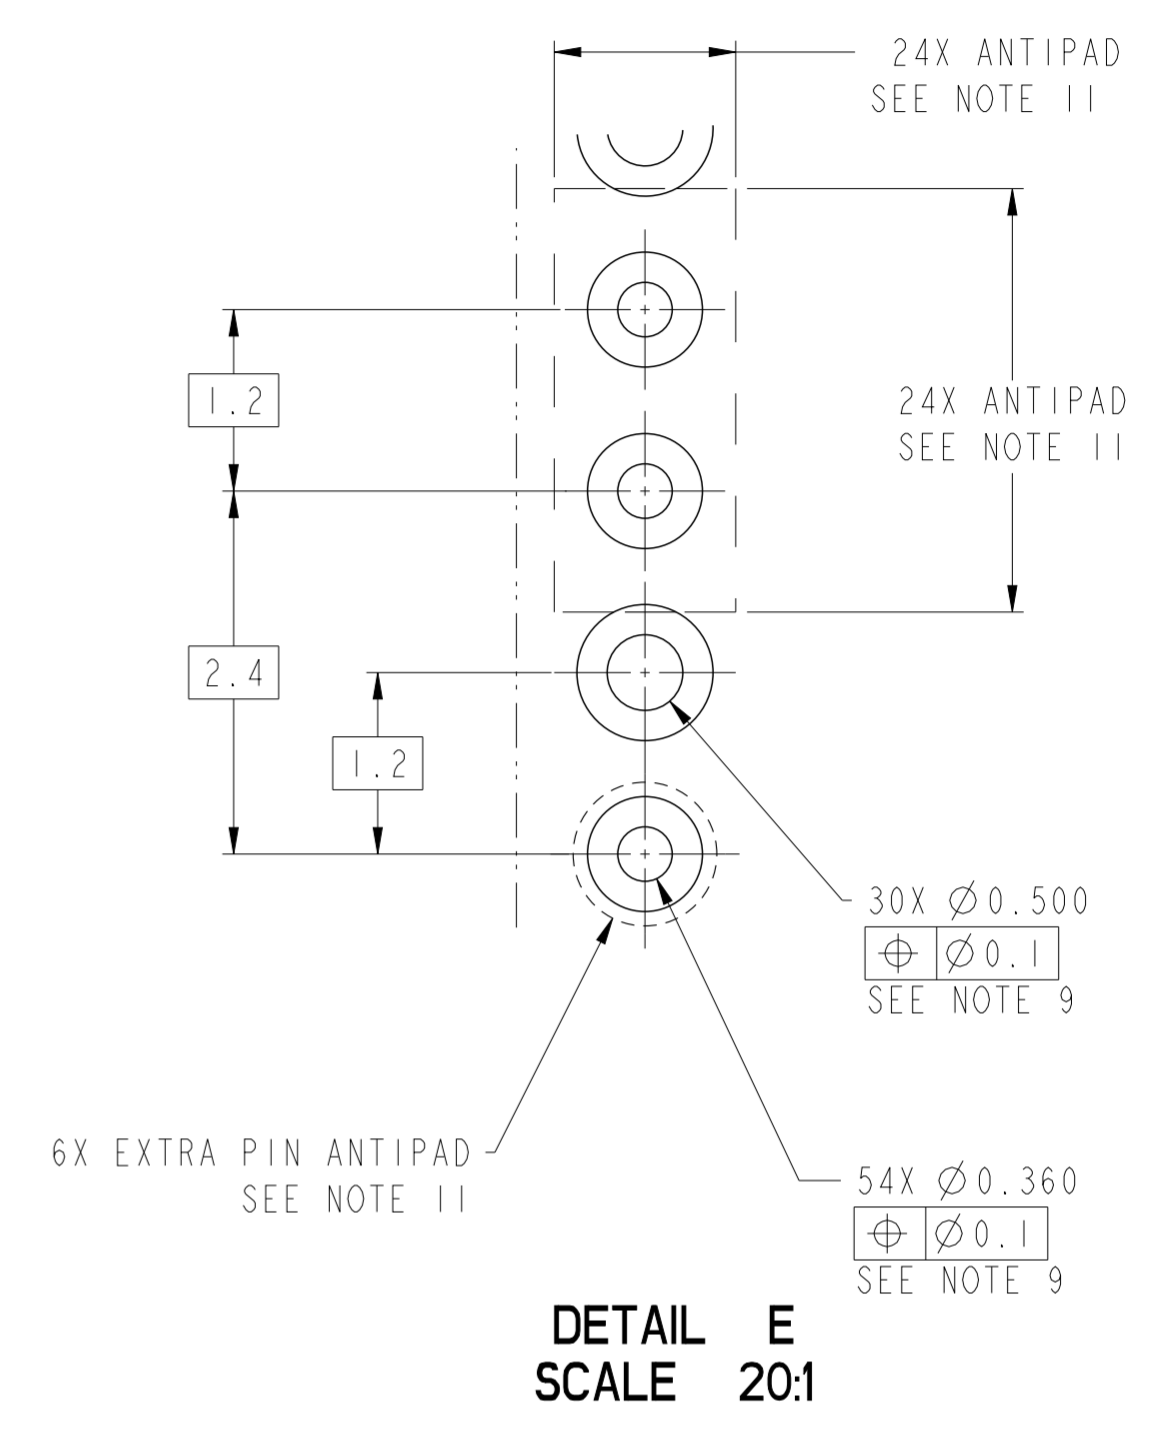
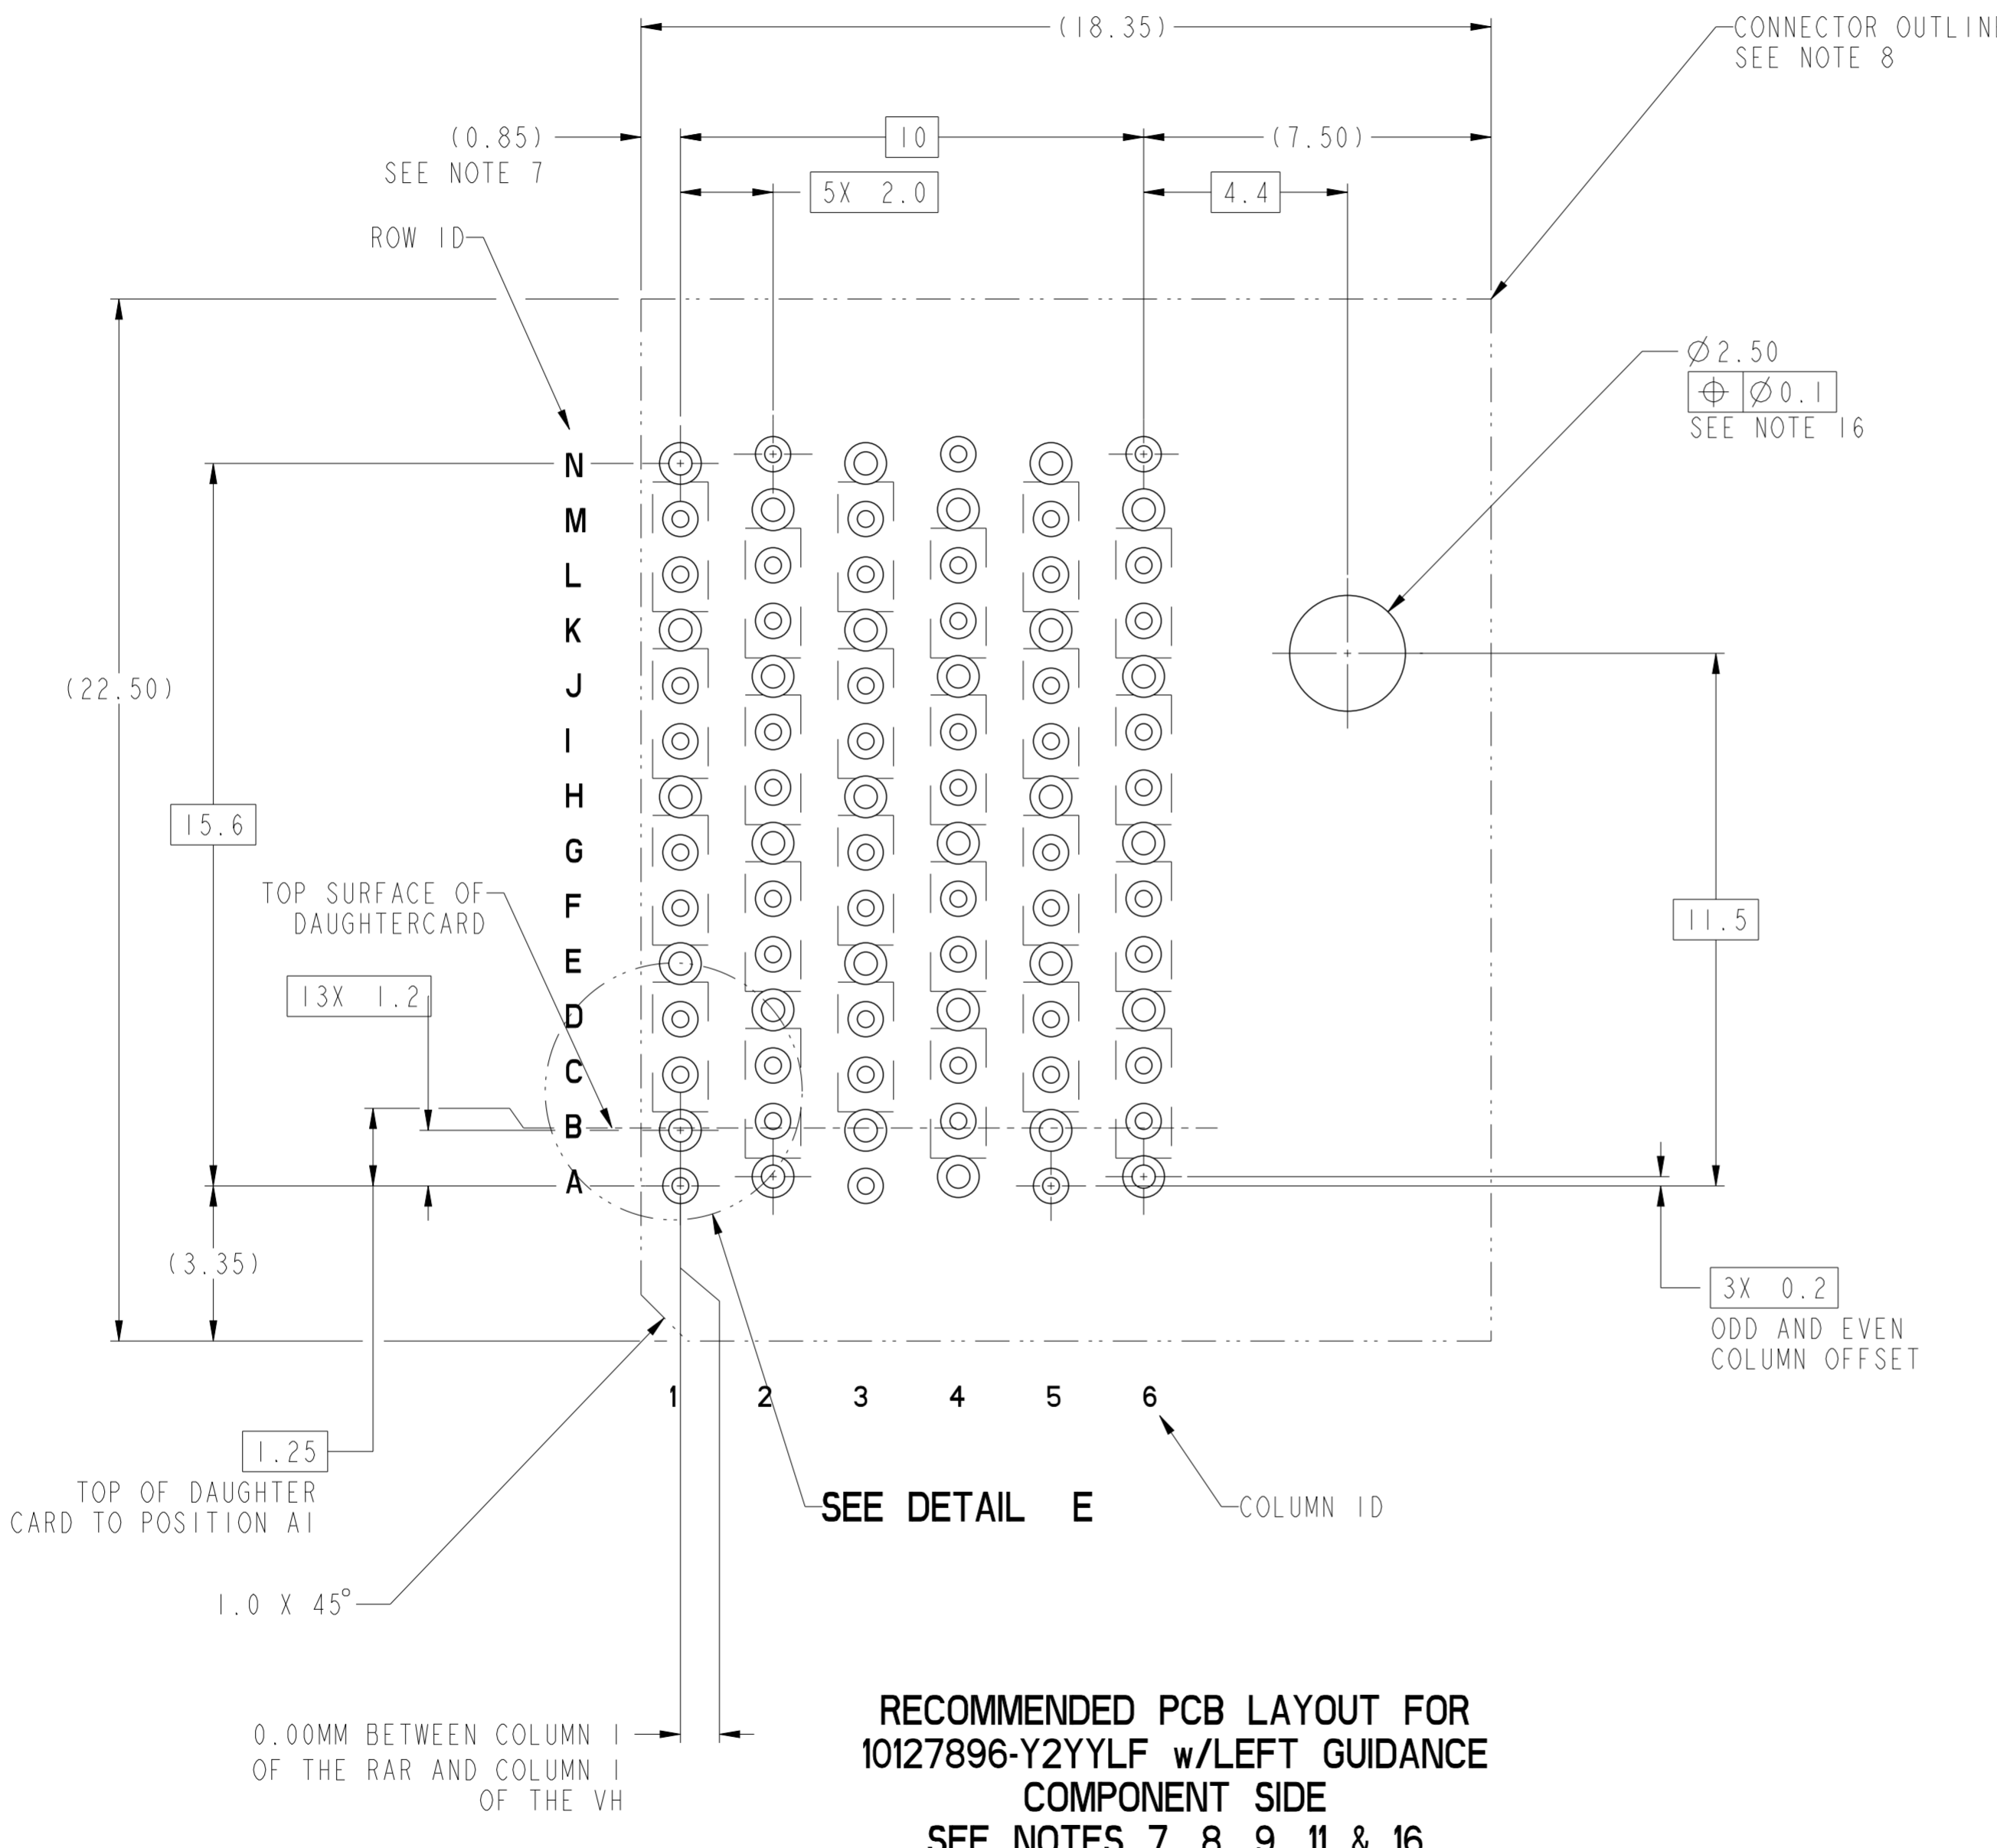




















**RECOMMENDED PCB LAYOUT FOR
10127896-Y2YYLF w/LEFT GUIDANCE
COMPONENT SIDE
SEE NOTES 7, 8, 9, 11 & 16**


| | | | | | | | | | | |
|---------------|---------------------------------------|------|--------------|------------|----------------------|----------|------------|-----------------------------|----------------|--------|
| spec ref | SEE NOTES | dr | Heaven Cen | 2013/1/12 | projection | MM | size | A2 | scale | 2:1 |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | eng | Peng-Bing Fu | 2020/08/13 | | | ecn no | ELX-DG-37989-1 | | |
| ASME Y14.5M | | chr | - | apppr | | | Heaven Cen | 2020/08/27 | product family | ExaMAX |
| surface | linear | 0.X | ±.3 | | Amphenol FCI | | title | ExaMAX VERTICAL HEADER ASSY | | |
| | | 0.XX | ±.10 | | 4 PR, 84 POS, 6 IMLA | cat. no. | SEE TABLE | Product - Customer Drw | sheet 9 of 11 | |
| | angular | 0° | ±° | | 10127896 | rev | B | | | |

10127896 - Y Y Y Y L F

PLATING
SEE NOTE 2
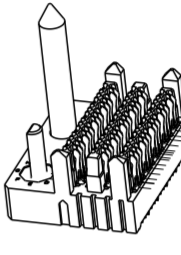
| MODULE DESCRIPTION | DESIGNATION REPRESENTED IN DASH NUMBER | | | | | | | | | | BASE MODULE |
|--|---|---|---|---|---|---|---|---|---|--|---|
| STANDARD NO GUIDANCE (SEE SHEET 1) | 01 | | | | | | | | | |  |
| RIGHT GUIDANCE MODULE (SEE SHEET 6) | 1A | 1B | 1C | 1D | 1E | 1F | 1G | 1H | 1J (NO KEY) | |  |
| |  |  |  |  |  |  |  |  |  | | |
| LEFT GUIDANCE MODULE (SEE SHEET 8) | 2A | 2B | 2C | 2D | 2E | 2F | 2G | 2H | 2J (NO KEY) | |  |
| |  |  |  |  |  |  |  |  |  | | |

| ASSEMBLY PART NUMBER | DESCRIPTION |
|----------------------|------------------------------|
| 10127896-1YYYYLF | STANDARD MATE |
| 10127896-2YYYYLF | ADVANCED MATE |
| 10127896-3YYYYLF | SHORT DETECT |
| 10127896-4YYYYLF | ADVANCED MATE & SHORT DETECT |

| | | | | | | | | | | | | | | | |
|---------------|---------------------------------------|-------|--------------|---------------------|---|-------|--------|-----------------------------|-----------|----------|----------------------|--------|--------|----------|---|
| spec ref | SEE NOTES | dr | Heaven Cen | 2013/1/12 | projection | MM | size | A2 | scale | 1:1 | | | | | |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | eng | Peng-Bing Fu | 2020/08/13 |  | ← → | ecn no | ELX-DG-37989-1 | rel level | Released | | | | | |
| ASME Y14.5M | | chr | - | - | | | | | | | | | | | |
| | | appr | Heaven Cen | 2020/08/27 | | | | | | | product family | ExaMAX | | | |
| surface | linear | 0.X | ±.3 | Amphenol FCI | | title | | ExaMAX VERTICAL HEADER ASSY | | rev | | | | | |
| | | 0.XX | ±.10 | | | | | | | | 4 PR, 84 POS, 6 IMLA | | dwg no | 10127896 | B |
| | | 0.XXX | ±.050 | | | | | | | | | | | | |
| | angular | 0° | ±° | | | | | | | | | | | | |

NOTES

- ①- CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
CONTACT: COPPER ALLOY;
GUIDE PIN AND KEY PIN: ZINC ALLOY
- 2 - CONTACT PLATING:
SEPARABLE INTERFACE:
-YYYYLF: PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-1096 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE
-YYY2LF:GXT+ OVER NICKEL
-YYY9LF:GXT OVER NICKEL

PRESS-FIT TAILS: TIN OVER NICKEL (LEAD FREE)
- 3 - PRODUCT SPECIFICATION: GS-12-1096
- 4 - APPLICATION SPECIFICATION: GS-20-0361
- 5 - PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
- ⑥- PRODUCT MARKING, (PART NUMBER & LOT CODE), ON THIS SURFACE.
- ⑦- THE MINIMUM VIA SPACING BETWEEN STACKED CONNECTORS WILL BE 2.0 mm OR 3.0 mm AS DEFINED BY NOTE 7 ON THE MATING RECEPTACLE CUSTOMER DRAWING. REFER TO THE APPLICATION SPECIFICATION FOR DETAILS.
- ⑧- CONNECTOR OUTLINE MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
- ⑨- REFER TO CUSTOMER DRAWING 10119933 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS
- 10- THIS PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES & OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004
- ⑪- REFER TO ROUTING GUIDE GS-20-0511 FOR RECOMMENDATIONS ON OPTIMIZATION OF FOOTPRINT AND TRACE ROUTING LAYOUT.
- 12- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10-30 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.
- ⑬- THE ADVANCED MATE HEADER, 10127896-2YYYYLF, WHEN MATED WITH AN ADVANCED MATE RECEPTACLE, WILL PROVIDE 2 PAIRS OF MATING CONTACTS THAT MATE 0.75MM BEFORE THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- ⑭- THE SHORT DETECT HEADER, 10127896-3YYYYLF, WHEN MATED WITH A STANDARD MATE RECEPTACLE, WILL PROVIDE 1 PAIR OF MATING CONTACTS THAT MATE 1.00MM AFTER THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- ⑮- THE ADVANCED MATE/SHORT DETECT HEADER, 10127896-4YYYYLF, WHEN MATED WITH AN ADVANCED MATE RECEPTACLE, WILL PROVIDE 2 PAIRS OF MATING CONTACTS THAT MATE 0.75MM BEFORE THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS, AND 1 PAIR OF MATING CONTACTS THAT MATE 1.00MM AFTER THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.
- ⑯- FOR CONNECTORS WITH EITHER A RIGHT OR LEFT GUIDE MODULE, ONE PHILLIPS PAN HEAD M2 HOLD DOWN SCREW MUST BE USED TO SECURE GUIDE PIN/CONNECTOR TO THE PCB. THE SCREW LENGTH SHALL BE 2.0 - 6.0mm PLUS THE THICKNESS OF THE BOARD. SCREW IS NOT PROVIDED WITH CONNECTOR.
- ⑰- LEFT / RIGHT INTEGRATED GUIDE ORIENTATION IS DETERMINED BY THE LOCATION OF THE GUIDE FEATURES WHEN LOOKING AT THE MATING FACE OF THE RIGHT ANGEL RECEPTACLE. THE LEFT / RIGHT DESIGNATION OF THE MATING HEADER IS DEFINED BY THE RIGHT ANGEL RECEPTACLE THAT IT MATES WITH (i. e. A RIGHT GUIDE VERTICAL HEADER MATES A RIGHT GUIDE RIGHT ANGEL RECEPTACLE.)
- ⑱- ALL GROUND CONTACTS WITHIN A COLUMN ARE COMMONED.

| | | | | | | | | | | | |
|---------------|---------------------------------------|-------|--------------|---------------------|----------------------|-----------|-----------------------------|----------------|----------|-----|---|
| spec ref | SEE NOTES | dr | Heaven Cen | 2013/1/12 | projection | MM | size | A2 | scale | 2:1 | |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | eng | Peng-Bing Fu | 2020/08/13 | | ← → | ecn no | ELX-DG-37989-1 | | | |
| ASME Y14.5M | | chr | - | | | | rel level | Released | | | |
| | | appr | Heaven Cen | 2020/08/27 | | | product family | ExdMAX | | | |
| surface | linear | 0.X | ±.3 | Amphenol FCI | title | | ExdMAX VERTICAL HEADER ASSY | dwg no | 10127896 | rev | B |
| | | 0.XX | ±.10 | | 4 PR, 84 POS, 6 IMLA | | | | | | |
| | | 0.XXX | ±.050 | | cat. no. | SEE TABLE | Product - Customer Drw | sheet 11 of 11 | | | |
| | angular | 0° | ±° | | | | | | | | |

Amphenol FCI

© 2016 AFCI