



5

4


3

2

1

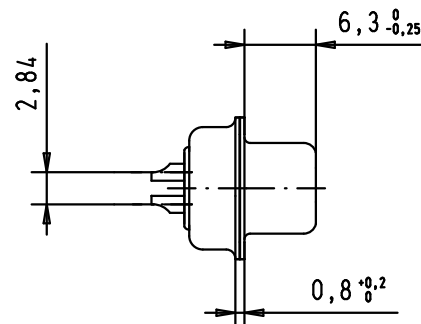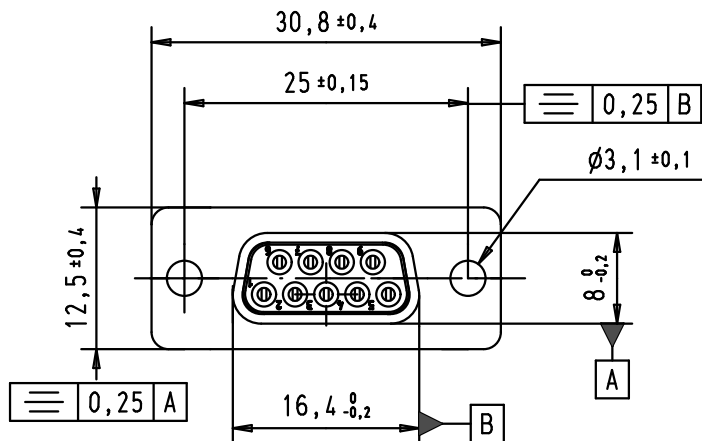

Solder bucket for AWG 20

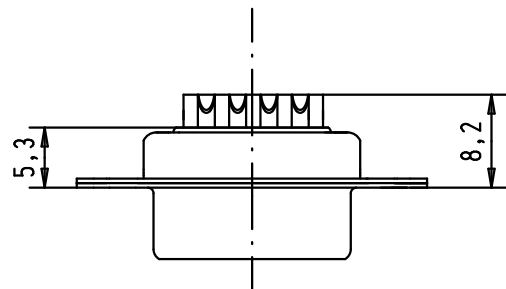

SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	47pf±20%
Working Voltage	100V
Current rating	7.5 A
Insulation Resistance	>1GΩ

Minimum Insertion Loss



FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

D

C

B

A

Mod.	Dot.	Name	Detail.	Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, female, straight 9 Poles, with turned solder bucket, fixing hole	Mo?Mstab/ Scale
			Insp.	12/01/12	JB			1.5:1
36283	12/01/12	SD	Stand.					
32802	11/07/05	JMDR						
31058	8-JUL-02	CV						
HARTING EURL F-95972 Paris							TB 09641117210	Blatt/ Page
								Sub.