



TELECOMMUNICATION MODEM COUPLING TRANSFORMER COMPATIBLE WITH V.90 TECHNOLOGIES

REV. Status

REVISION -  
12/10/01 MP


REVISION A  
CHANGED  
DIMENSIONS  
03/10/04 MP

REVISION B  
ADDED "C"  
CLASS TO  
MARKING NOTE  
05/16/06 MP

- A. Electrical Specifications (@ 25°C)
1. Pri Source Impedance; 600Ω
  2. Sec Load Impedance; 600Ω
  3. Insertion Loss;  
0.75dB MAX @ 1KHz, 0dBm
  4. Frequency Response (relative to 1KHz)  
±0.50dB @ 200Hz to 4KHz, 0dBm
  5. Longitudinal Balance;  
60dB MIN @ 200Hz to 1KHz  
40dB MIN @ 1KHz to 4KHz
  6. Return Loss; 20dB MIN @ 1KHz, 0dBm
  7. DC Resistance;  
(1-2) = 25Ω ±10%  
(3-4) = 21Ω ±10%
  8. Turns Ratio; (1-2):(4-3) = 1:1.00±2%
  9. Dielectric Strength;  
1875Vrms 1 second Pri to Sec
  10. Total Harmonic Distortion;  
-70dB MAX @ 600Hz, -10dBm (-76dB TYP)



MODEL NUMBER  
TTC-5018

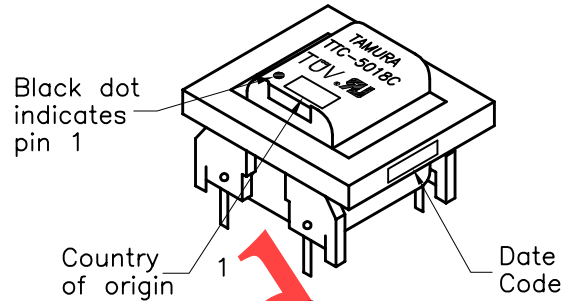


- B. Marking; TTC-5018C, TAMURA, date code and country of origin.  
"C" designates UL approved family classification.


- C. Safety: UL 1950 3rd Edition, UL60950, EN60950



- D. Schematic Diagram

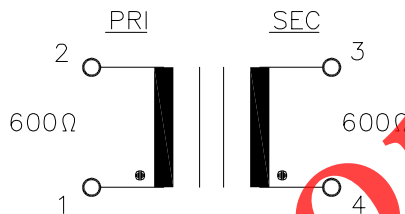

- E. Mechanical Specifications

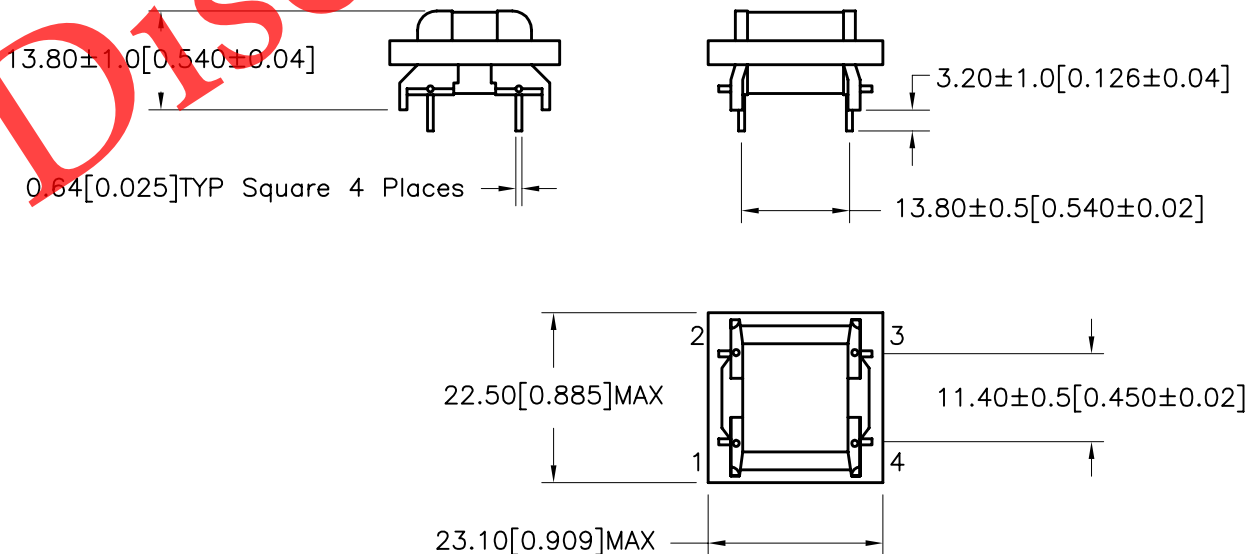

PREPARED BY:  
K. BRENNAN

ENGINEER:  
M. PITCHAI

QUALITY CONTROL:  
T. CLEM

APPROVED:  
Y. SEKIGUCHI

DWG CONTROL NO.  
P-A1-12743  
ACAD\TTC\A1127431.DWG

REV  
B

MODEM COUPLING  
TRANSFORMER

TAMURA CORPORATION OF AMERICA  
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
(951) 699-1270 FAX 9516769482

TTC-5018

MODEL SPECIFICATION

DIM: mm [In] SCL: 1/1 SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.