



Electrical specifications

Center Frequency: 410.5 MHz
Bandwidth: 1 MHz
Insertion Loss: 5.5 dB max
Ripple in Bandwidth: 1.0 dB max
VSWR: 1.5:1 min
Input / Output Impedance: 50 Ohms
Rejection: 25dB min at 415 MHz
Power Handling: 5 W

Mechanical



Mounting Method: SMT
Dimensions: 26 x 24 x 7 mm

Environmental

Operating Temperature: -20 to +70 deg. C
Storage Temperature: -50 to +90 deg. C

This product is RoHs compliant.

Outline Drawing:

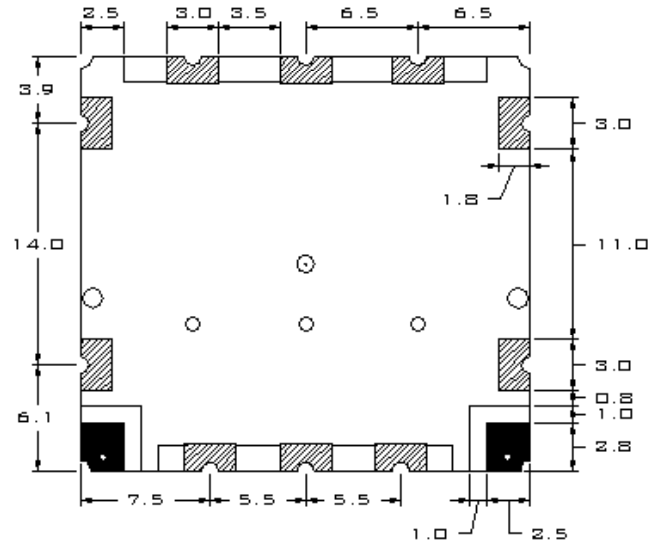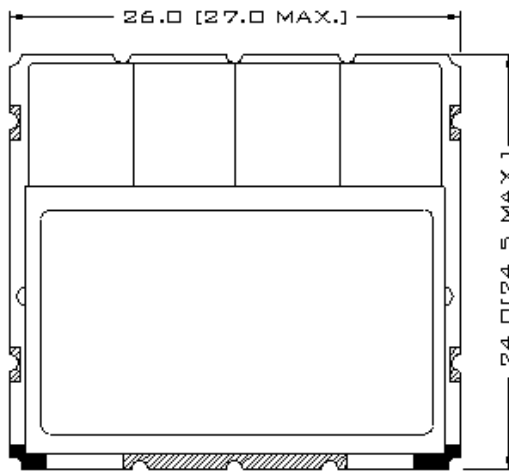

■ I/O PORT
 ▨ GROUND

TOLERANCE : ± 0.20
 UNIT : mm