



DIRECTIONAL FLAT PANEL ANTENNA PA9-12

900 MHZ 12 DBI FLAT PANEL ANTENNA

The PA9-12 flat panel directional antenna by Laird offers high-gain in a thin, low-profile package. The antenna is constructed of an off white color UV resistant ASA plastic radome with an aluminum backplate. The antenna can be used in horizontal or vertical polarization. The heavy duty pole mount bracket allows up or down tilt adjustment and the stainless steel hardware assures a long service life. The antenna can be surface mounted or pole mounted. The PA9-12 comes with an integral N female connector standard.

FEATURES


- High gain / low profile
- Pole mount or surface mount
- Rugged IP67 rated weatherproof construction
- Vertical or horizontal polarization

MARKETS

- 900 MHz wireless LAN applications
- WISP client antennas
- RFID applications
- OEM wireless data
- Transport terminals
- WiMAX

PARAMETER	SPECIFICATION
Part Number	PA9-12
Frequency	902-928 MHz
Gain	12 dBi
3 dB Beamwidth-Azimuth	40°
3 dB Beamwidth-Elevation	55°
Polarization	Linear Vertical
VSWR	1.5:1
RF Connector	Type N (f)
Power Rating	10 W
Dimensions	16.2 x 14.7 x 1.4 in (411 x 373 x 36 mm)
Weight	1.36 kg
Operational Temperature	-30°C to +70°C
Mount Style	Surface / Mast
Pole Size	1 to 2.5 in (25 to 64 mm)
RoHS	Compliant

HORIZONTAL PLANE

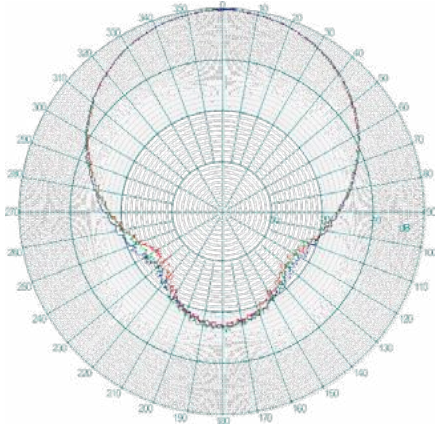


902 MHz

915 MHz

928 MHz

ELEVATION PLANE

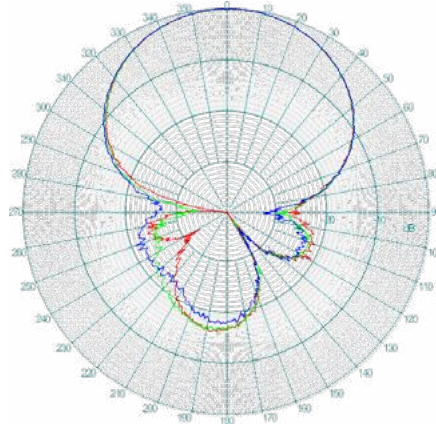

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original