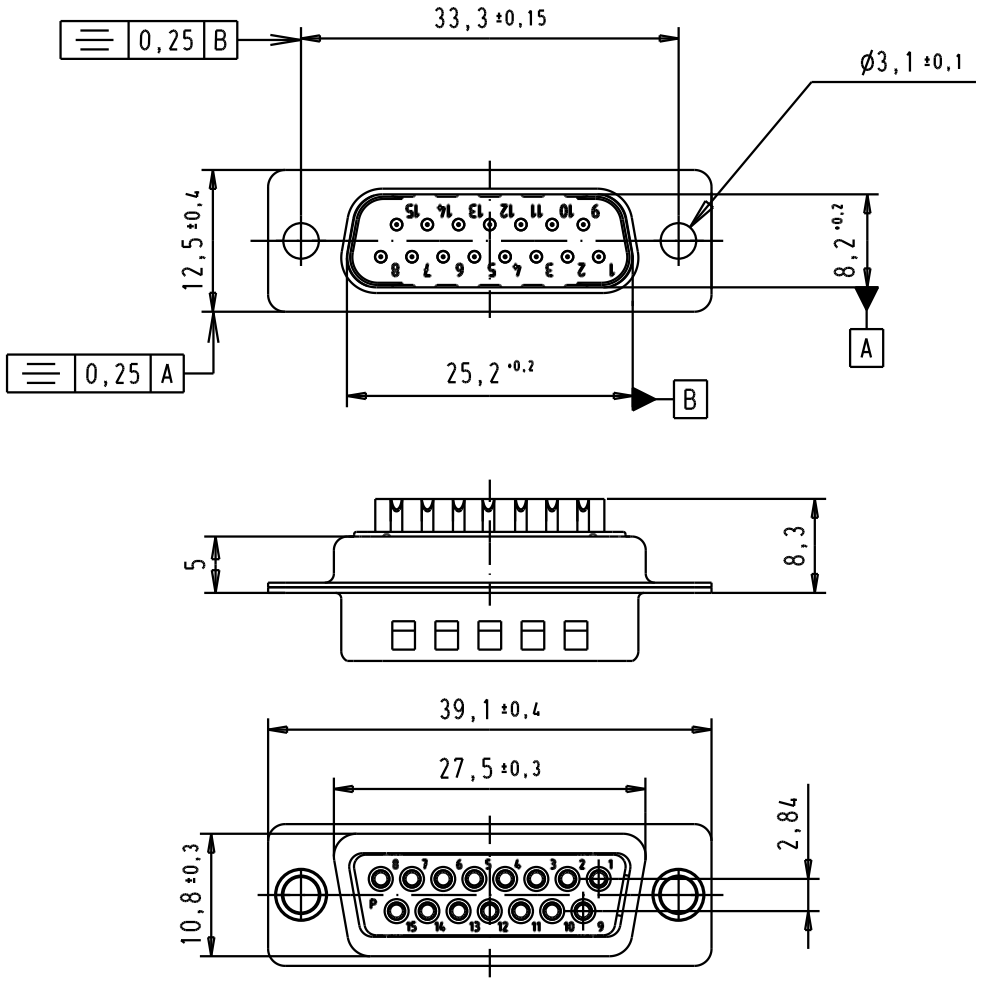



Solder buckets for AWG 20 Max

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	470pf ±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

				Dat.	Name		
			Detail.	8-JUL-02	CV	All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight 15 Poles, solder buckets, tin plated shell with dimples and holes
			Insp.				Ma?Mstab/ *Scale* 1.5:1
			Stand.				
33267	17/11/05	JMDR	HARTING EURL F-95972 Paris				TB 09642217220
31058	8-JUL-02	CV					Sub.
Mod.	Dat.	Name					Blatt/ *Page* 1/1