


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/30/00	-	INITIAL RELEASE
NC	04/30/08	100012	UPDATE DRAWING FORMAT

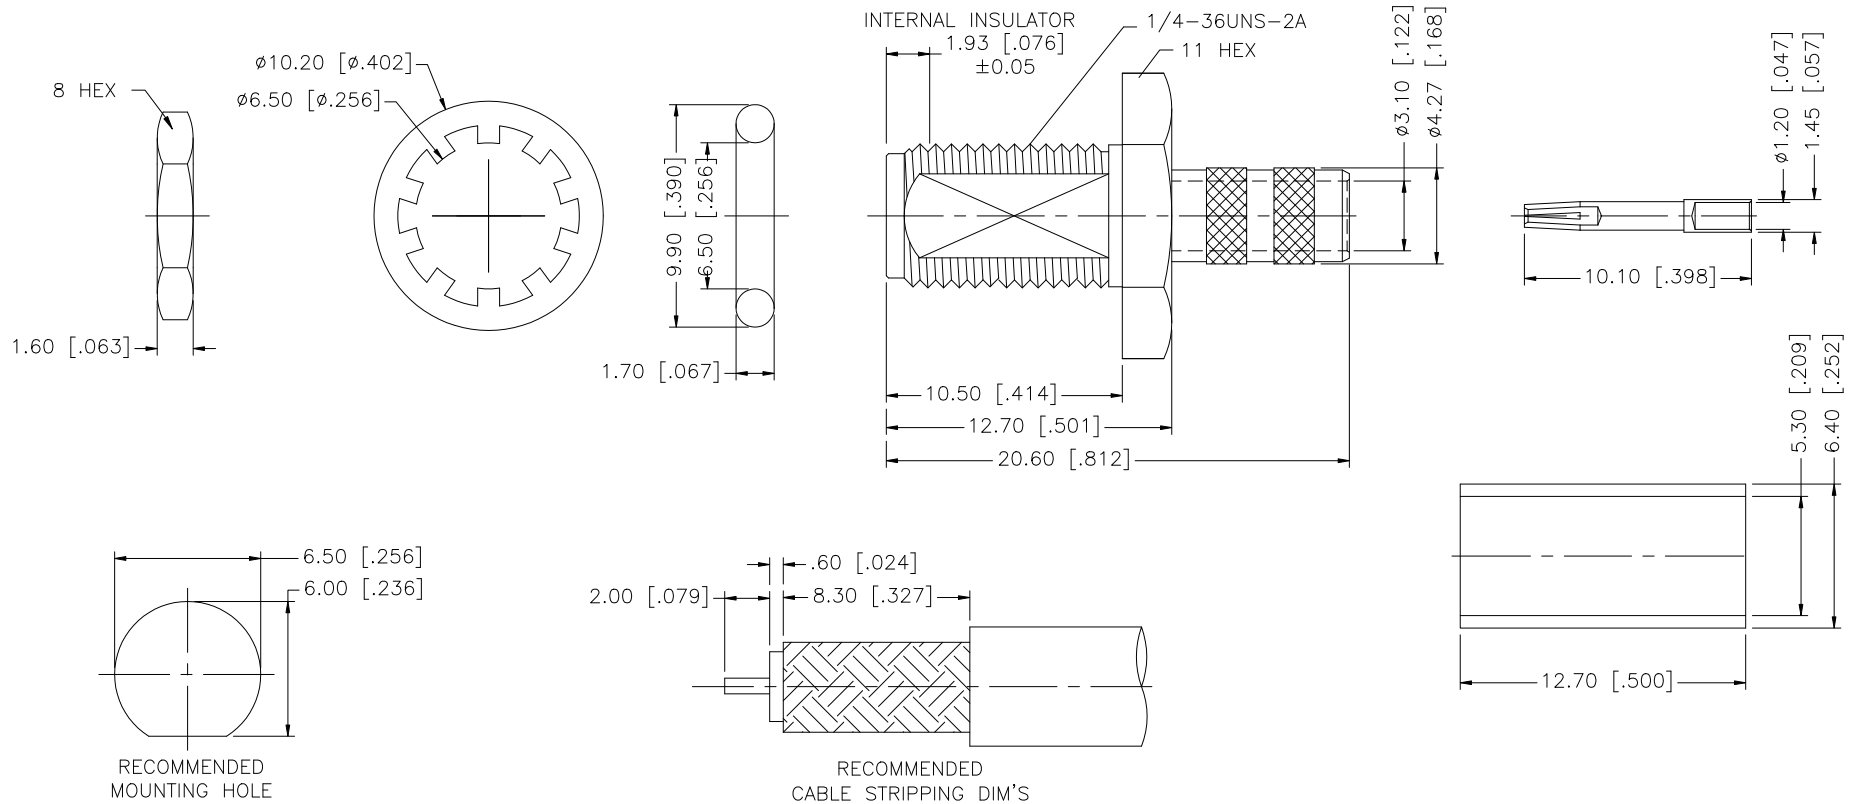

NOTES:
1. CRIMPED FERRULE HEX CRIMP SIZE .213"

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	PART DESCRIPTION					
8							<h1 style="text-align: center; color: blue;">Amphenol Connex</h1> <p style="text-align: center;">SMA BULKHEAD CRIMP JACK O-RING SEAL (FOR RG-58C/U, 58/U CABLE)</p>					
7	FERRULE	COPPER	GOLD	1	DRAWN	GRS					04/30/08	
6	HEX NUT	BRASS	GOLD	1	CHECKED							
5	LOCK WASHER	BRASS	GOLD	1	ISSUED							
4	GASKET	SILICONE	RED	1	SHEET	1 OF 1						
3	CONTACT PIN	BER. COPPER	GOLD	1	PART NO.		132280					
2	INSULATOR	PTFE	NATURAL	1	DWG. NO.		132280.DWG		REV.	A	SCALE	NA
1	BODY	BRASS	GOLD	1	CAD FILE		C:/132/132280.DWG					

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20 mm
8 - 30mm ± 0.40 mm
30 - 120mm ± 0.50 mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007 "
.315 - 1.180 = ± 0.015 "
1.180 - 4.724 = ± 0.020 "