

PanView iQ™ (PViQ™) TX6™ PLUS Keyed UTP Jack Module

PANDUIT®

SPECIFICATION SHEET

specifications

Category 6/Class E, 8-position keyed UTP jack module shall terminate unshielded twisted 4-pair, 22 – 26 AWG, 100 ohm cable without the use of a punchdown tool. The forward motion termination method shall optimize performance by maintaining cable pair geometry and eliminating conductor untwist. The jack module shall be mechanically keyed with positive keying features to prevent unintentional mating with unlike keyed or non-keyed (non-PViQ™) patch cords. The termination cap shall indicate T568A and T568B wiring schemes. PViQ™ Jack Modules shall be used with the PViQ™ System only.



technical information

Category 6A/ Class E channel and component performance:	Certified channel performance in a 4-connector configuration up 100 meters and exceeds the requirements of ANSI/TIA-568-C.2 Category 6 and ISO 11801 Class E standards
	Certified component performance to the ANSI/TIA-568-C.2 Category 6 and ISO 11801 Class E standards
FCC compliance:	Meets ANSI/TIA-968-A; contacts plated with 50 microinches of gold for superior performance
IEC compliance:	Meets IEC 60603-7
PoE compliance:	Meets IEEE 802.3af and IEEE 802.3at for PoE applications
UL rated:	UL 1863 approved
Conductor termination range:	Wire cap compatible with 22 – 26 AWG solid or stranded cable with conductor insulation diameters of 0.060 in. max and overall cable O.D. 0.200 in. to 0.330 in.

key features and benefits

Positive keying features	Improves security by mechanically preventing connections with non-PViQ™ Patch Cords
Integrated block out feature	Prevents insertion of RJ11 phone plugs
100% performance tested	Confidence that each jack module will deliver the critical electrical performance requirements
Utilizes enhanced Giga-TX™ Technology	Wire cap optimizes performance by eliminating conductor untwist and reduces installation time and expense; simplifies termination and maintains conductor twists for reliable and consistent terminations
Modular	Jack modules snap in and out of PViQ™ Modular Patch Panels for easy moves, adds, and changes
True strain relief	Controls cable bend radius for long term installed performance
Individually serialized	Marked with quality control number for future traceability
Termination tools (optional)	EGJT termination tool ensures conductors are fully terminated by utilizing a smooth forward motion without impact on critical internal components for maximum reliability; TGJT is tool ideal for high volume installations

applications

Panduit's PanView iQ™ (PViQ™) System, which includes intelligent patch panels, modules and cabling, seamlessly feeds information directly into the Physical Infrastructure Manager™ (PIM™) Software Platform to provide continuous real-time patch field monitoring and visibility of physical infrastructure

connectivity for enhanced system reliability, security, and capacity management.

PViQ™ Keyed UTP Jack Modules provide mechanical differentiation and physical layer security that conventional cabling systems cannot provide.

PanView iQ™ TX6™ PLUS Keyed Jack Module

Jack module: CJQ688TGBL*

PanView iQ™ Patch Panels

Modular, intelligent, blank 24-port Flat unshielded: PVQ-MIQPU24

Angled, unshielded: PVQ-MIQAPU24

PanView iQ™ Intelligence Modules

Panel Manager (PM): PVQ-PM

Expansion Manager (EM): PVQ-EM

Note: PM requires PanView iQ™ Power Supply (not included).

PanView iQ™ TX6™ PLUS Keyed UTP Patch Cords

Cross-Connect – UTP Category 6 Foot lengths: PVUTPSPC^BBUY

Meter lengths: PVUTPSPC^MBBUY

Interconnect – Basic UTP Category 6

Foot lengths (CM): PVQ-BIU6C^MBU

Meter lengths (CM): PVQ-BIU6C^MBU

Meter lengths (LSZH): PVQ-BIU6L^MBU

TX6000 UTP Copper Cable

Plenum: PUP6004**-UY

Riser: PUR6004**-UY

LSZH: PUL6004**-UY

PanView iQ™ Power Supply

12 volt power supply (North America): PVQ-PS12VDC-S

(Europe): PVQ-PS12VDC-E

(UK): PVQ-PS12VDC-U

(Japan): PVQ-PS12VDC-J

(China): PVQ-PS12VDC-C

Tools and Accessories

Termination tools: TGJT or EGJT

Wire snipping tool: CWST

Wire stripping tool: CJUST

Clear dust cap: MDC-C

*Available in black only.

**To designate color, add suffix BU (Blue), WH (White), IG (International Gray), or YL (Yellow).

^For lengths 3, 5, 7, 9, 14, 20 feet, change the length designation in the part number to the desired length. Available in (BU) Blue only.

^^For lengths 1, 2, 3, 5, 7, 10 meters, change the length designation in the part number to the desired length. For standard cable colors other than BU (Blue), substitute the BU suffix with GR (Green). For example, the part number for a green 5-meter patch cord is PVUTPSPC5MBGRY.

^^^For lengths 3, 5, 7, 10, 14, 20 feet, change the length designation in the part number to the desired length. For standard cable colors other than BU (Blue), substitute the BU suffix with GR (Green). For example, the part number for a green 5-foot patch cord is PVQ-BIU6C5GR.

^^^For lengths 1, 2, 3, 5, 10 meters, change the length designation in the part number to the desired length. For standard cable colors other than BU (Blue), substitute the BU suffix with WH (White). For example, the part number for a white 5-meter patch cord is PVQ-BIU6L5MWH.


PanView iQ™ (PViQ™) TX6™ PLUS Keyed UTP Jack Module

reliability tests

Mechanical Test	Test Method	Measurement	Typical Test Results
<i>Normal Force</i>	—	Load (grams)	> 100
<i>Vibration</i>	IEC 512-6d	Circuit Resistance (mOhms)	< 40
<i>Shock</i>	IEC 512-6c	Contact Disturbance (microsecond)	< 5
<i>Durability</i>	IEC 512-9a	Circuit Resistance (mOhms)	< 40
<i>Mating/Un-Mating</i>	IEC 512-13b	Mating Force (N)	< 20
		Un-Mating Force (N)	< 20

Electrical Test	Test Method	Measurement	Typical Test Results
<i>Low Level Circuit Resistance</i>	IEC 512-2a	Resistance (mOhms)	< 20
<i>Dielectric Withstand Voltage</i>	IEC 512-4a	1000 V, 1 minute	Passed
<i>Insulation Resistance</i>	IEC 512-3a	Resistance (MOhms)	> 500

Environmental	Test Method	Measurement	Typical Test Results
<i>Temperature Life</i>	IEC 512-9b	Circuit Resistance (mOhms)	< 40
<i>Humidity</i>	IEC 512-11c	Circuit Resistance (mOhms)	< 40
<i>Thermal Shock</i>	IEC 512-11d	Circuit Resistance (mOhms)	< 40
<i>Climatic Sequence</i>	IEC 512-11a	Circuit Resistance (mOhms)	< 40
<i>Flowing Mixed Gas Corrosion</i>	IEC 512-11g	Circuit Resistance (mOhms)	< 40

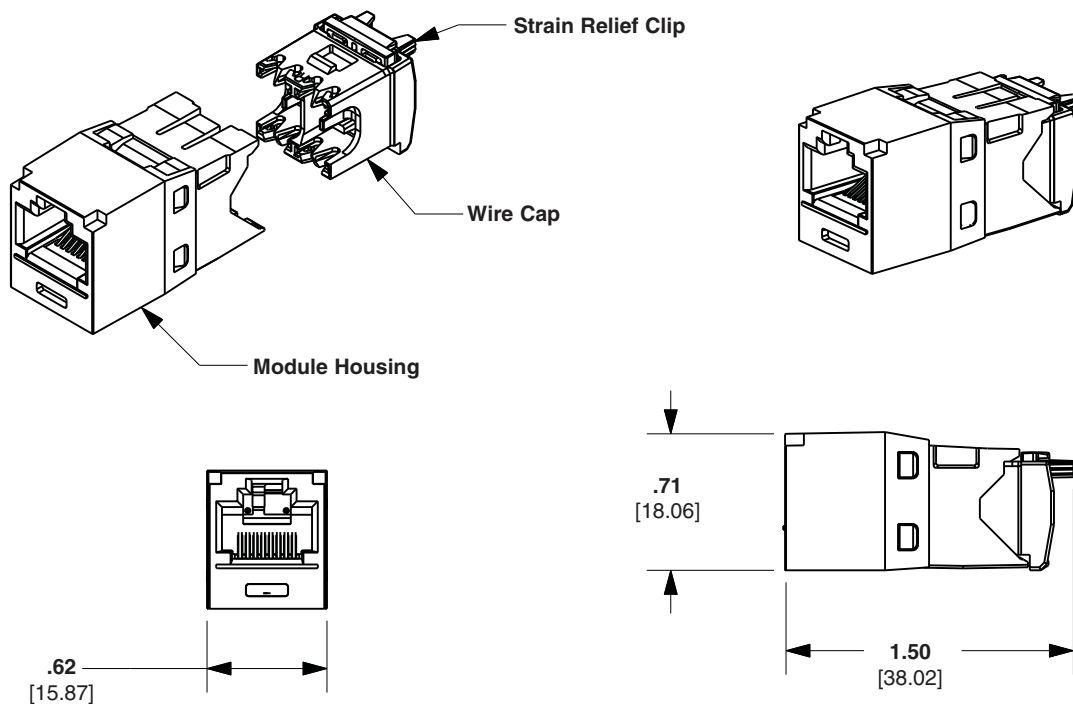

Dimensions are in inches. [Dimensions in brackets are metric].

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

©2012 Panduit Corp.
ALL RIGHTS RESERVED.
PVSP79--WW-ENG
Replaces WW-PVSP39
12/2012