


5320F & 5322F Series 3mm (T-1) LED Right Angle Circuit Board Indicator



Electro-Optical Characteristics and Ratings

DIM A 5320 .35 (8.9) 5322 .25 (6.4)

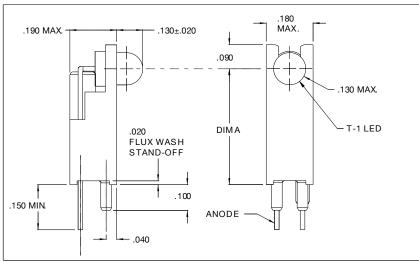




Features

- T-1 LED lamp right angle mounted, preassembled and tested.
- Black Nylon block, high contrast ratio, height and spacing alignment saves assembly cost.
- Mounting pins secure block to PC board while soldering.
- 2 different board heights to select from.

Mounting Hole Pattern



All dimensions are in inches

Forward Voltage Rated Continuous Forward Reverse Breakdown Peak Typical Emitted Part Number Intensity Current Current Max Тур. (V) Max. Voltage Min Wavelength Color (mcd) (mA) (mA) (V) (V) (nm) 5322F1 Red 10 10 30 2.0 3.0 5 650 5322F5 Green 16 10 30 2.2 3.0 5 562 5322F7 Yellow 585 6.3 10 30 2.1 3.0 5 5320F1 Red 10 10 30 2.0 3.0 5 650 5320F5 Green 16 10 30 2.2 3.0 5 562 5320F7 Yellow 6.3 10 30 2.1 3.0 5 585 5322F1LC * Red 1.8 2 1.8 2.0 5 635 -5322F7LC * Yellow 1.8 2 18 25 5 583 -

* Low Current

Compliances and Approvals



