METRIC | NUMBER C-177909 | 三角法 (3rd ANGLE PROJECTION)

PRINT DIST

寸法:mm DIMENSIONS IN MM. DO NOT SCALE PRINT

▲5 表1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTUARING PLACE)
—AMP OR AMP	日本 (JAPAN)
—+AMP OR AMP	中国 (CHINA(PRC))
·AMP OR AMP	韓国 (KOREA)

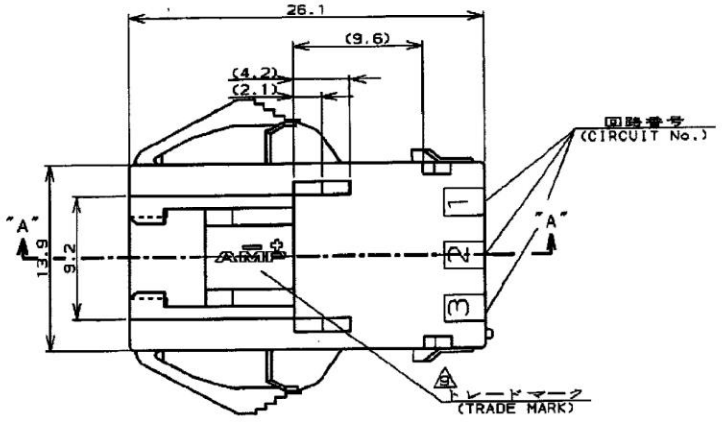



パネル取付穴寸法 FIG 1
(RECOMMENDED PANEL OPENING DIMENSION)

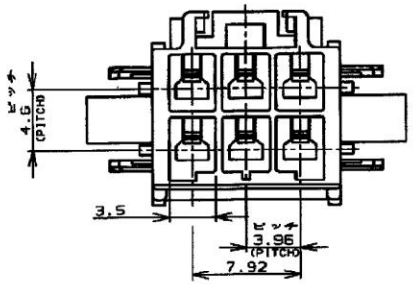

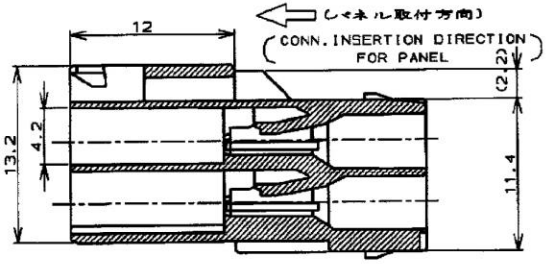

断 面 "A"-"A"
(SECT)

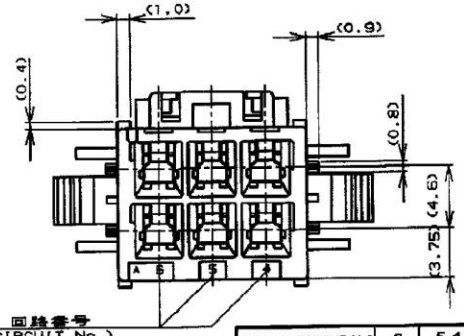

NOTES;
1. PRODUCT SPEC.: 108-5410
2. APPLICABLE CONTACT P/N
TAB CONTACT: 177917-[ ]*20-*16AWG)
: 177916-[ ]*26-*22AWG)
3. MATING CONN.P/N
PLUG HSG.177901-[ ]
REC CONTACT.: 177915-[ ]*20-*16AWG)
177914-[ ]*26-*22AWG)
4. APPLICABLE PLATE P/N: 177919-[ ]
5. INSTRUCTION SHEET : 411-5638
6. APPLICABLE PANEL THICKNESS : 0.8-2.0 (SEE FIG 1)
7. INSERT CONN.FROM PRESS DIRECTION SIDE FOR METAL PANEL.
8. EDGE OF THICKNESS MAY MUST NOT ROUND FOR MOLDED PANEL.
▲5 SEE TABLE 1

10. PART 5-177909-1 COMPLY WITH GLOW WIRE REQUIREMENT FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30(GWT)

11. APPLICATION SPEC: 114-5175

注:
1. 適用製品規格: 108-5410
2. 適用コンタクト型番
タブ・コンタクト: 177917-[ ]*20-*16AWG)
177916-[ ]*26-*22AWG)
3. 嵌合相手側製品型番
プラグ・ハウジング: 177901-[ ]
リセ・コンタクト: 177915-[ ]*20-*16AWG)
177914-[ ]*26-*22AWG)
4. 適用プレート型番: 177919-[ ]
5. 取扱説明書: 411-5638
6. 適用パネル厚: 0.8-2.0 (FIG 1参照)
7. 金属パネルの場合、コネクタ取付方向をパンチ加工方向にしてください。
8. プラスチック、パネルの場合、欠端部にRをを絶対設けないでください。
▲5 表1参照

自然色(NATURAL)	6	5-177909-1
青 (BLUE)		-6
黄 (YELLOW)		-4
自然色(NATURAL)	6	177909-1
ハウジング色調 (HOUSING COLOR)	極数 (Pos.)	型番 (P/N)

LTR	変更 (REVISION RECORD)	DR	CHK	DATE
C2	REVISED PER ECR-19-017851	SM	DZ	21NOV 2019
C1	REVISED ECR-13-018171	A.Z	D.Z	20NOV '13
C	変更 FJOO-1369-01			
B	変更 FJOO-0955-98	T.Y	M.S	4/15 '98
A	変更 FJOO-2380-95	N.Y	N.S / R.T	4/15 '98
0	作成 FJOO-0791-93	M.S	N.S / K.K	9/8 '93

被覆電線導体径 (WIRE RANGE)	mm² (AWG -)	絶縁外径 (INSULATION DIA.)	mm
材料 (MATERIAL)	6/6 ナイロン (UL94V-0) 6/6 NYLON (UL94V-0)	仕上 (FINISH)	
DR.	9.SEP '93 M.SUZUKI	DE.	9.SEP '93 M.SUZUKI
CHK.	9.SEP '93 M.SHINDO	APP.	9.SEP '93 Y.KASHIWA

AMP Tyco Electronics AMP K.K. Kawasaki,Japan

名称 (NAME) アンプ パワー ダブルロックコネクタ
6極 3.96mmピッチ キャップ・ハウジング(パネル取付タイプ)
AMP POWER DOUBLE LOCK CONN. 3.96mm PITCH CAP HOUSING 6 Pos(PANEL MOUNT)

一般公差: 10以下 ±0.2; 10を超え 30以下 ±0.25; 30を超え 100以下 ±0.3; 角 ±3°

SIZE B | LOC J | 番号 (No.) C-177909

尺度 (SCALE) — | REV. C2 | SHEET 1 OF 1

AMP-J REV.10/93 FJ078600

CUSTOMER DRAWING