



LOC	DIST	P	F	ZONE	LTR	REVISIONS	DESCRIPTION	DATE	APPD
G	14					E	REVISED & REDRAWN PER 0720-0303-93	7-26-93	BB

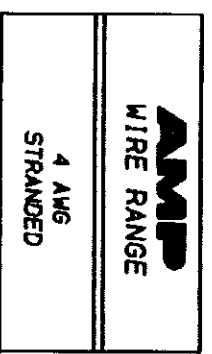

**METRIOR**  
 DIMENSIONS LISTED IN MM [ INCHES ]

NOTE:  
 1. WIRE INSULATION DIA 9.40 [ .370 ] MAX

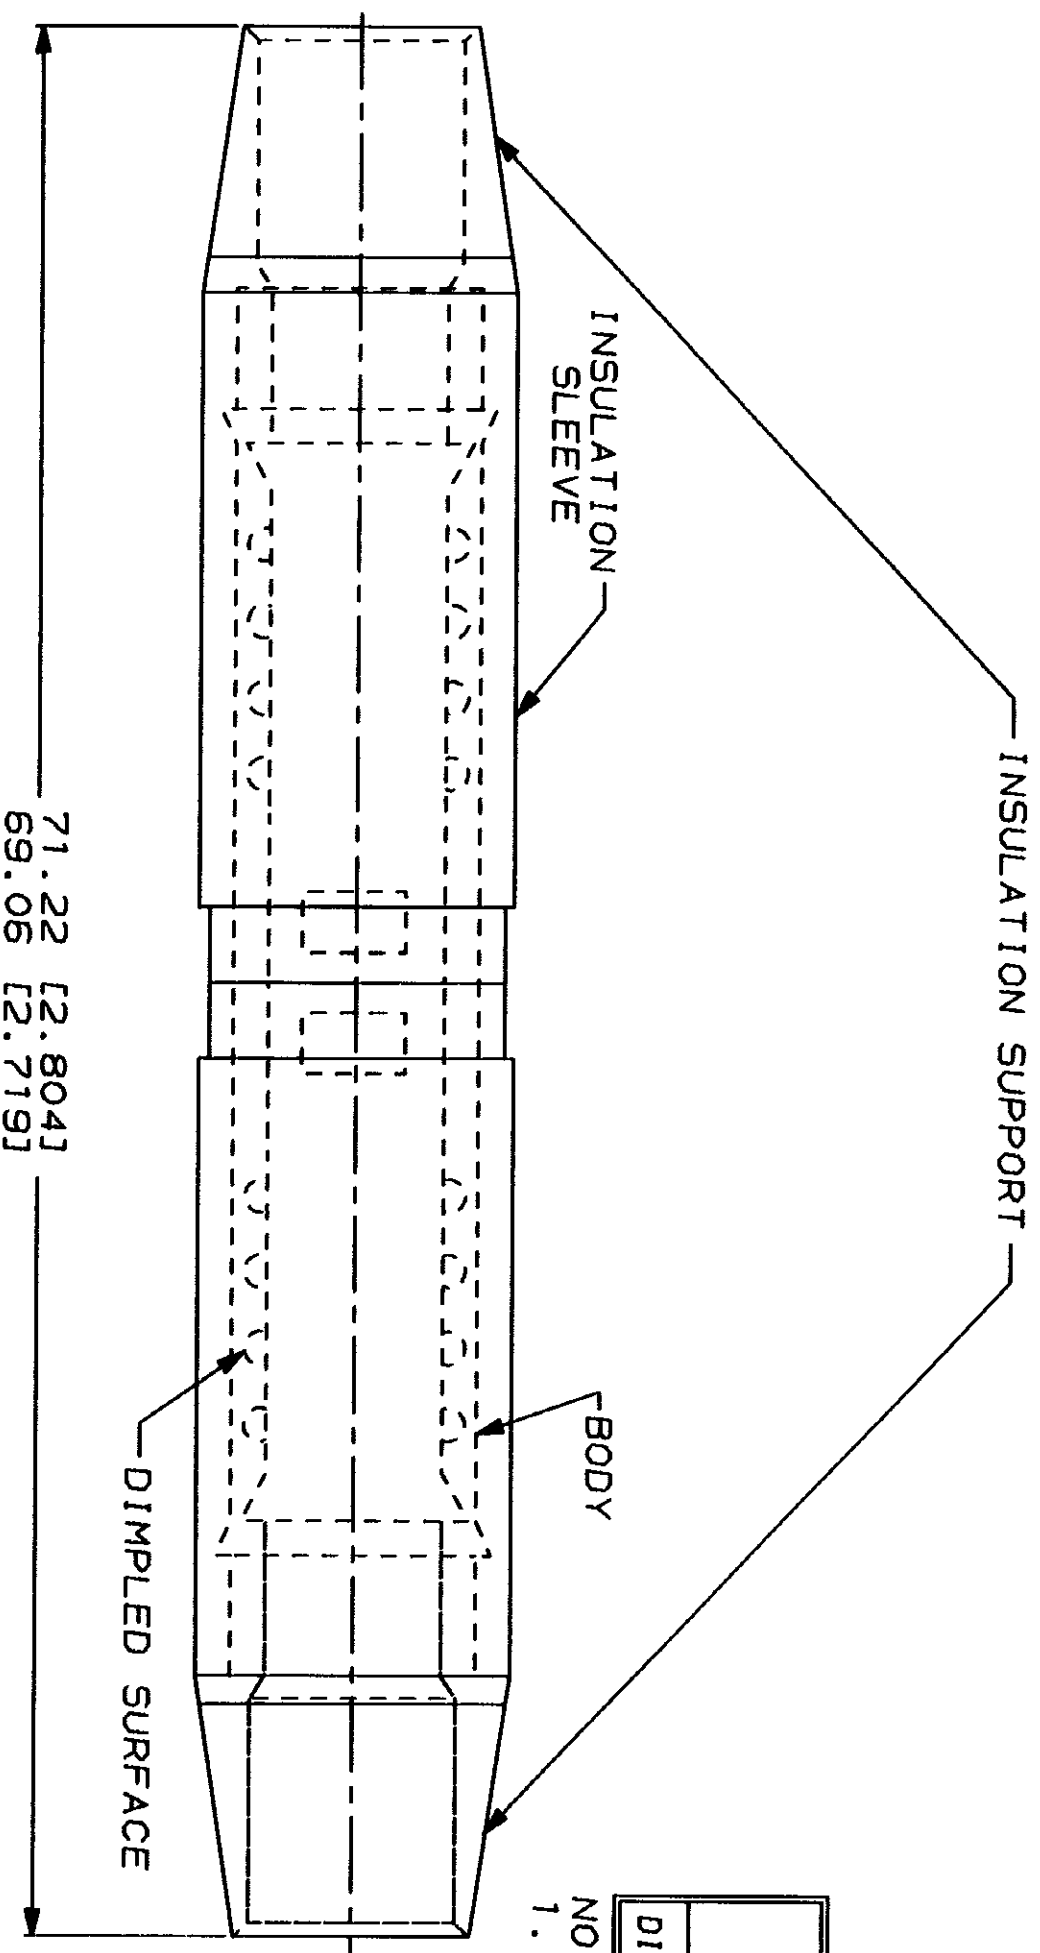

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		VOLTAJE RATING: 600 V MAX	
FOR APPLICATION		CIRCULAR MIL AREA: 16.77-26.65mm <sup>2</sup> [ 33,100-52,600 ]	
TOOLING INFORMATION		STRANDED	
FOR ORDER ENTRY		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	

DO NOT SCALE PRINT. UNLESS SPECIFIED		DR 7-26-93 S.S. GOLDEN	
TOLERANCES UNLESS SPECIFIED		CHK 7-26-93 R. HERSEY	
2 PLC DEC ± 0.201.000		APPD 7-26-93 B. BLUE	
3 PLC DEC ± .		APPD 7-26-93 M. BLIS	
MATERIAL		PRODUCT SPEC	
CORNER PER ASTM B-152		APPLICATION SPEC	
M/L/W. COLOR, YELLOW		WEIGHT	
FINISH			
TIN PLATE			
PER MIL-T-10727			

100	LOOSE PC	324622
QTY	PACKAGE TYPE	PART NO
<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608 NAME SPLICE, BUTT, SINGLE TO SINGLE, TERMINYL, WIRE SIZE: 4 AWG		
SIZE	CAGE CODE	DRAWING NO
B	00779	G=324622
SCALE	NTS	SHEET
		1 OF 1