


SPECIFICATIONS

FREQUENCY (MHz)	ATTENUATION (dB)
5	1
10	2
50	4
100	4,5
500	4,5
1000	4,5

Operating voltage < 250 V AC
 Working current < 7,5 A
 Insulation resistance > 1GΩ
 Contact resistance < 15 mΩ
 Dielectric withstanding voltage 500 V AC / minute

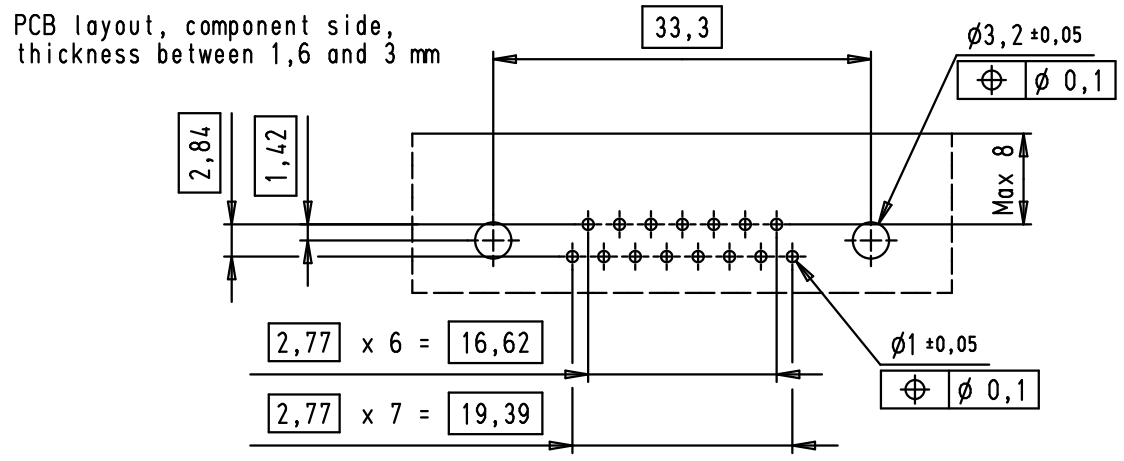

09 64 223 7802	PL3
Part number	Performance level

				Dot.	Name
				Detail.	02/07/09 PK
				Insp.	
				Stand.	
EC02296	06/09/10	SC			
EC00362	02/07/09	PK			
Mod.	Dot.	Name	HARTING EURL F-95972 Paris		



D-Sub, male, angled, US footprint, 15 poles, tin plated shell with dimples, solder pins, ferrite filter	Maßstab/ Scale 1,5:1
TB 09 64 223 7802	Blatt/ Page 1 / 1
Sub.	