
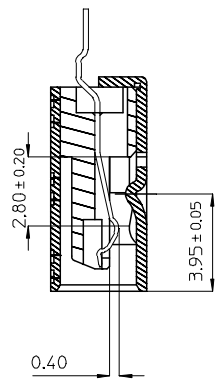



10 9 8 7 6 5 4 3 2 1

F
E
D
C
B
A


F
E
D
C
B
A

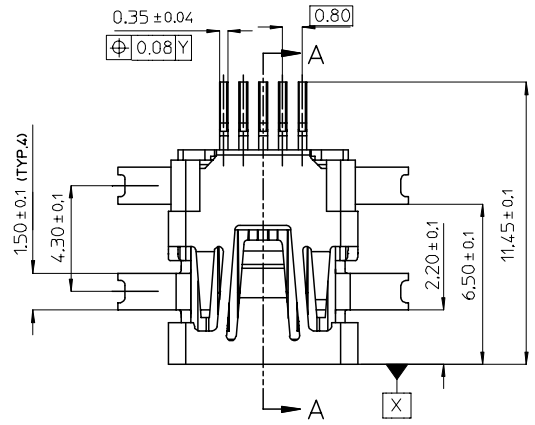

SECTION A-A


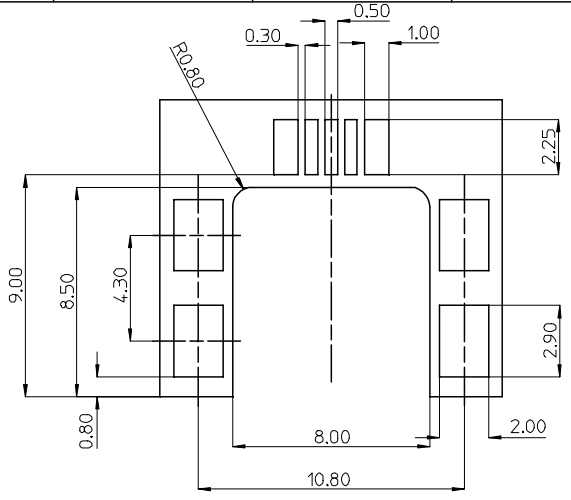


RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05MM

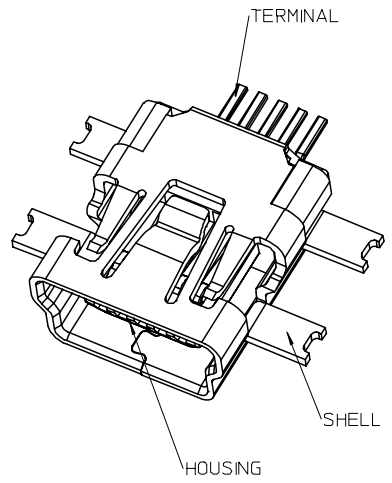

NOTE:

1. MATERIAL:
HOUSING : LIQUID CRYSTAL POLYMER(LCP),
GLASS FIBER FILLED, UL94V-0.COLOUR:BLACK.
TERMINAL : PHOSPHOR BRONZE.THICKNESS=0.2±0.05MM.
SHIELD : STAINLESS STEEL.THICKNESS=0.4MM.
2. PLATING:
TERMINAL:
CONTACT AREA: GOLD 0.76 MICROMETER MINIMUM.
SOLDER TAIL AREA: PURE MATTE TIN 3.8 MICROMETER MINIMUM.
UNDER PLATING:F-NICKEL.
SHIELD:
PURE MATTE TIN 3.8 MICROMETER MINIMUM.
UNDER PLATING:NICKEL.
3. TAIL & NAIL COPLANARITY 0.1 mm MAXIMUM.
4. PRODUCT SPECIFICATION REFER TO PS-47153-001
5. PACKAGING REFER TO PK-48242-001
6. TEST SUMMARY REFER TO TS-48242-001
7. LEAD-FREE AND ROHS COMPLIANCE.

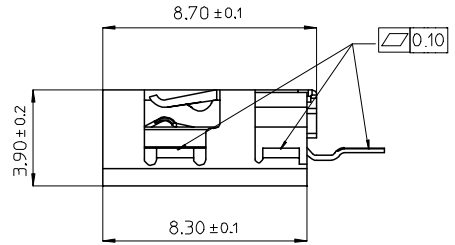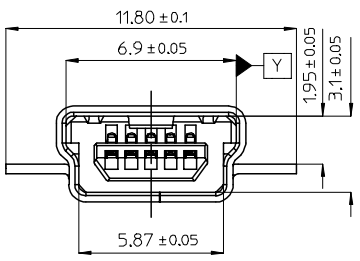

RELEASED EC NO: SH2006-0297 DRW: EKA001 CHKD: APPR: WWSCHANG	2006/01/17 2006/01/17 2006/01/18	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0
	2006/01/17 2006/01/17 2006/01/18	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0
	2006/01/17 2006/01/17 2006/01/18	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0
	2006/01/17 2006/01/17 2006/01/18	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES	± ---
3 PLACES	± ---
2 PLACES	± 0.25
1 PLACE	± 0.25
ANGULAR ± 3 °	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
LISHER	2005/11/29
CHECKED BY	DATE
ERIC KAO	2005/11/29
APPROVED BY	DATE
WILSON	2005/11/29
MATERIAL NO.	48242-0001

SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
MINI-B REC. CONN SMT SINK TYPE (LEAD-FREE VERSION)		
MOLEX INCORPORATED		
DOCUMENT NO.	SD-48242-001	SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

9 8 7 6 5 4 3 2 1