






APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/22/08	
A		REVISED SHAPE	10/24/11	
B		UPDATE SPEC.	11/8/16	AY/YC

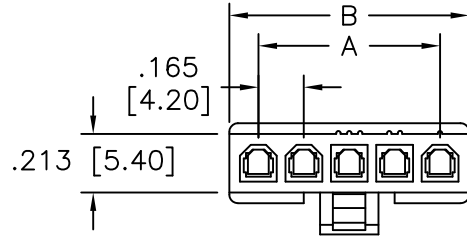

POSITION=2~6

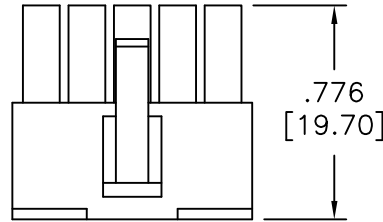

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

Electrical:

Voltage Rating: 500V AC,DC

Current Rating: 8A AC,DC

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.

A = .165 [4.20] X No. of Spaces

B = .165 [4.20] X No. of Positions+ .055 [1.40]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅.X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE FEMALE WIRE HOUSING, SINGLE ROW
.165 [4.20] PITCH

APPROVALS		DATE
DRAWN	DY	9/22/08
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	DMH-XX-S	B
REF:	S00016T	SCALE: NTS
		SHEET 1 OF 1

