Unit : mm

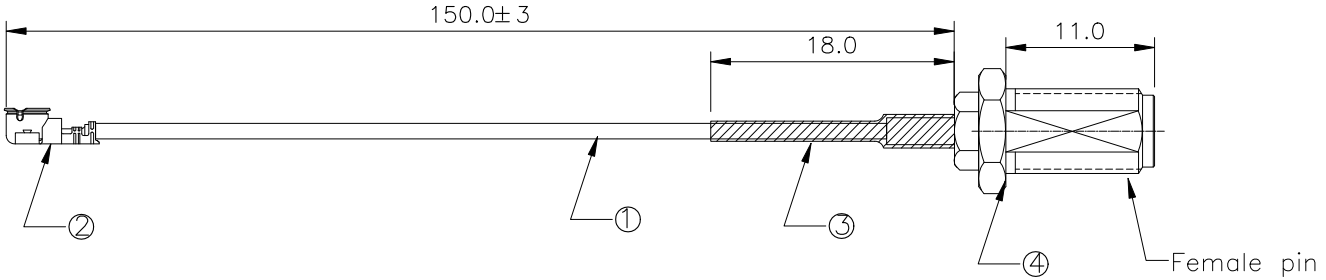

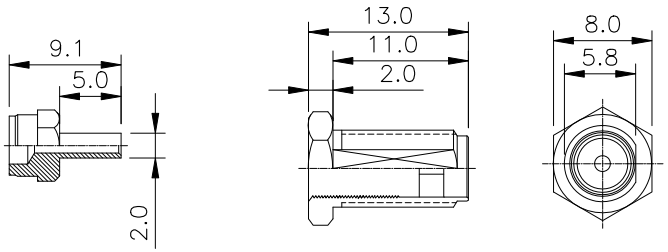

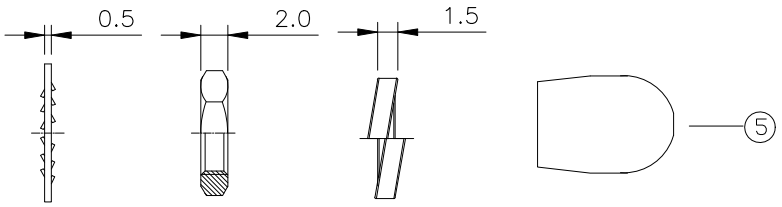

LOCK WASHER HEX NUT SPRING WASHER RED HAT

Note: parts in bulk,
100SET/bag

ELECTRICAR CHARACTERISTICS REQUIREMENTS:
1.Product must be 100% conductionr,open circuit short circuit test.
2.Conductive resistance：20Ω
3.Rated voltage: AC 60V
4.Withstand voltage: AC 200V
5.Insulation resistance:500m Ω
6.characteristic impedance：50Ω
7.Adopt environmental protection process and meet ROHS requirements
8. Tensile test: 1.5kg~
9. The general tolerance shall prevail if no tolerance is noted

RoHS Compliant

ITEM	PART No.	VENDOR	DESCRIPTION	Q'TY	OVERALL WIRE LENGTH
	MATERIAL SPECIFICATION				
5	COVER	–	RED HAT PACKING SMA	1	–
4	SMA FEMALE	–	11*1.78–ZYK–OPENING WELDING GOLD PLATING	1	–
3	HEAT SHRINK SLEEVE	–	2.0*18MM BLACK HEAT SHEINK SLEEVE	1	–
2	IPEX–1.37 CONN	–	IPEX–1.37 BRASS GOLD	1	–
1	COAXIAL CABLE	–	RG1.37 GRAY–48–TIN–FEP JACKET L=155mm	1	155

SYM	NAME	DATE	REVISIONS	DRAWN BY	CHECKED BY	APPROVED BY	CONFIRMED BY	DESCRIPTION
③				LuLu 08/21.20'	Iron 08/21.20'	Iron 08/21.20'	Waleed 08/21.20'	RF CABLE
②								
①								SHEET: 1 OF 1

瀚荃股份有限公司 CviLux Corporation

CUST. CODE	
CUC	
DRAWING No.	CviLux P/N
DH50628A	DH-20G50014
CUSTOMER P/N	
–	