
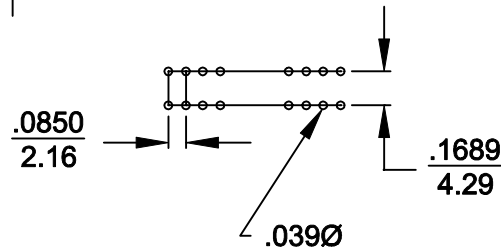
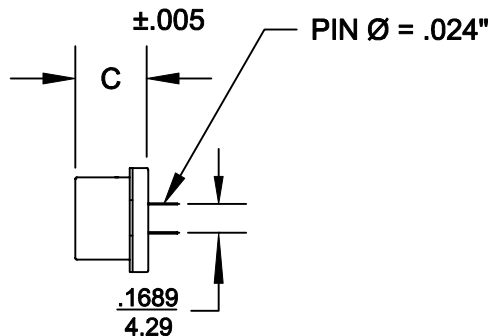
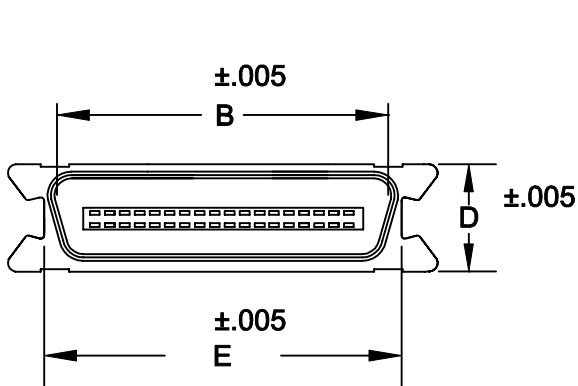


DESCRIPTION: .085" RIBBON DIP SOLDER

	A	B	C	D	E
14	1.729 43.92	.992 25.20	.502 12.75	.602 15.20	1.417 35.99
24	2.154 54.71	1.417 36.00	.502 12.75	.602 15.20	1.843 46.79
36	2.665 67.69	1.925 48.90	.502 12.75	.602 15.20	2.352 59.74
50	3.047 77.40	2.538 64.47	.502 12.75	.602 15.20	2.689 68.30

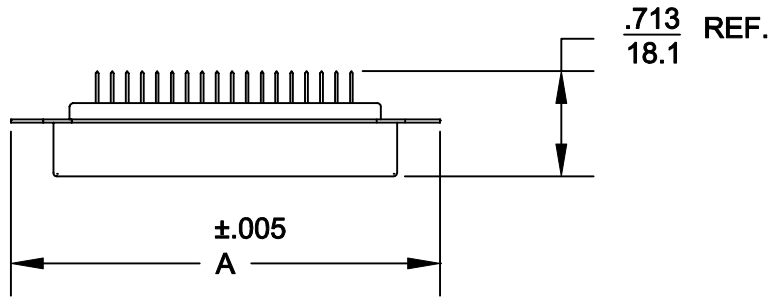

111-XXX-113-101

SERIES \_\_\_\_\_  
 POSITIONS \_\_\_\_\_  
 014 \_\_\_\_\_  
 024 \_\_\_\_\_  
 036 \_\_\_\_\_  
 050 \_\_\_\_\_

GENDER \_\_\_\_\_  
 1 = MALE

TERMINATION \_\_\_\_\_  
 1 = DIP SOLDER

SHELL PLATING \_\_\_\_\_  
 3 = NICKEL

HARDWARE OPTIONS \_\_\_\_\_  
 10 = BAIL LATCH RECEPTACLE

PLATING OPTIONS \_\_\_\_\_  
 01 = GOLD FLASH

**MATERIALS:**

INSULATOR: GLASS-FILLED THERMOPLASTIC  
 UL RATED 94V-0

CONTACTS: COPPER ALLOY  
 ELECTRICALS:


CONTACT CURRENT RATING: 5 AMPS

DIELECTRIC WITHSTANDING VOLTAGE: AC 1200 R.M.S.

INSULATION RESISTANCE: 1000 mohms MINIMUM AT 500V DC

CONTACT RESISTANCE: 30 mOHMS MAXIMUM

OPERATING TEMPERATURE: -55°C TO +125°C

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: <b>WAYNE ROBBINS</b>	DATE: <b>9-21-98</b>	
		CHECKED:	DATE:	
NorComp		SCALE: 1:1	SHEET 1 OF 1	REV 3
		DWG NO. 111-XXX-113-101		