
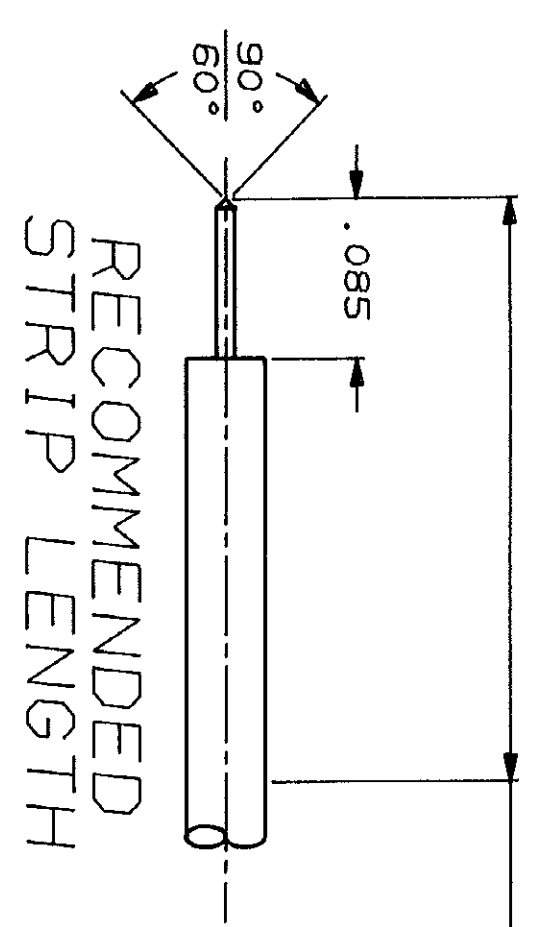


- 1 BERYLLIUM COPPER PER QQ-C-530
- 2 PTFE PER MIL-P-19468
- 3 GOLD PL PER MIL-G-45204
- 4 NICKEL PL PER QQ-N-290
- 5. FOR USE WITH .047 SEMI-RIGID CABLE.

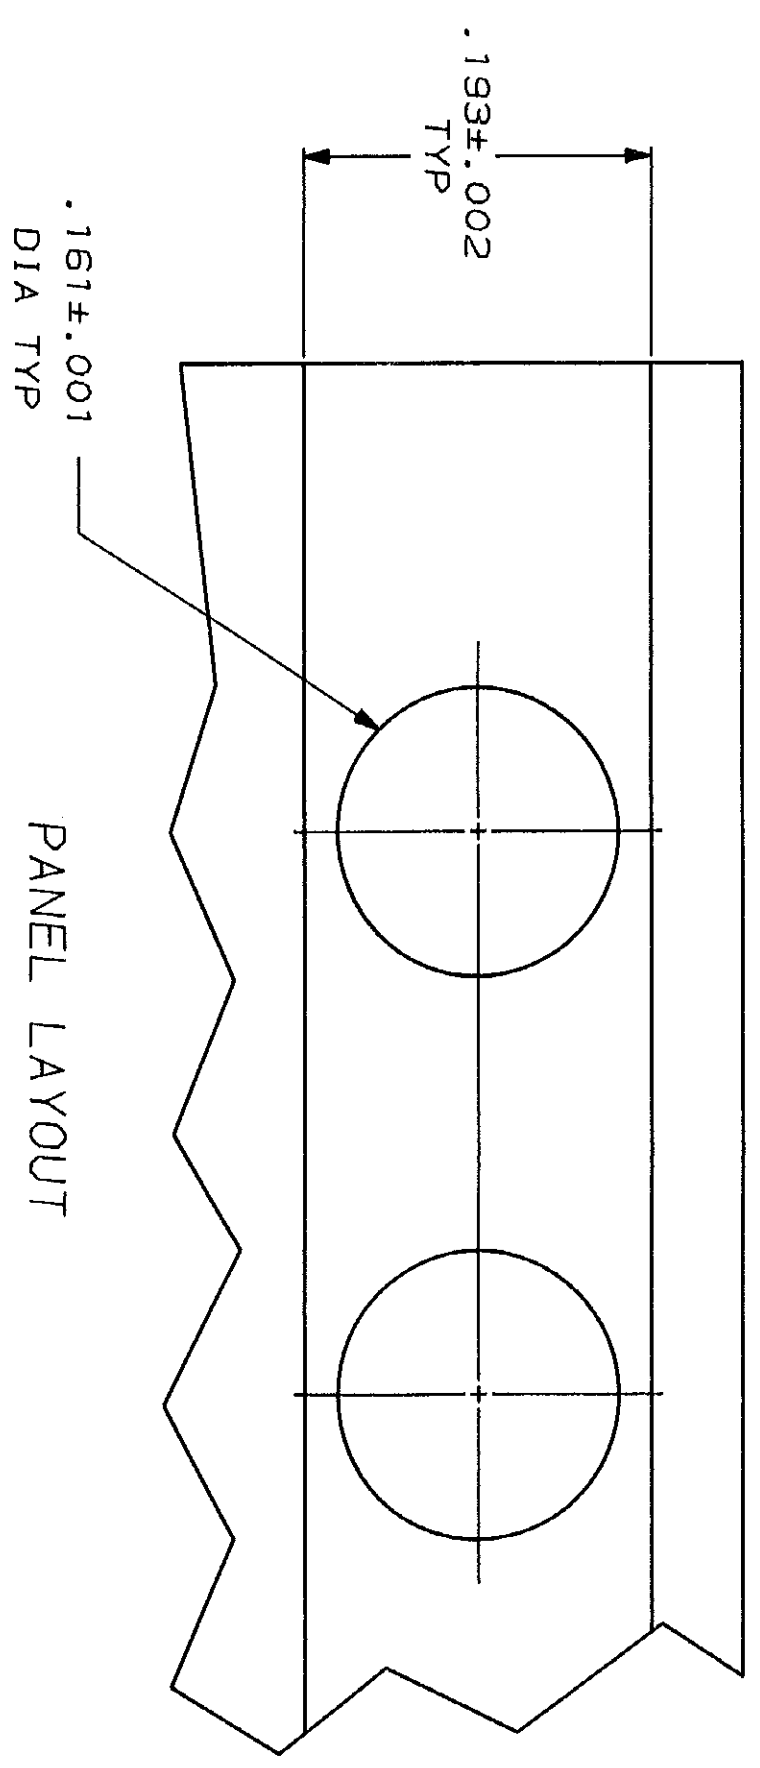

.310 MIN STRAIGHT CABLE REQUIRED TO APPLY CONNECTOR

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON 1		DR	8-22-88	NAME	JACK, BULKHEAD, BLIND MATE 2.8MM
1	2	3	4	APPD	8/24/88
2	3	4	1	APPD	9-6-88
3	4	1	2	PRODUCT SPEC	
4	1	2	3	APPLICATION SPEC	
1	2	3	4	FINISH	
2	3	4	1	WEIGHT	
3	4	1	2	SCALE	10:1
4	1	2	3	SHEET	1 OF 1

413024-1
 PART NO

AMP
 AMP INCORPORATED
 Harrisburg, Pa. 17105

JACK, BULKHEAD,
 BLIND MATE 2.8MM

SIZE FSCH NO DRAWING NO
 C 00779 413024

CUSTOMER DRAWING