
# 53112-1 - ACTIVE

TE Internal #: 53112-1 Splices, 20 – 16 AWG Wire Size, .5 – 1.25 mm² Wire Size, Serrated, 8 Serration, Length 1.63 in [41.1 mm], Bag, Open, Stranded Wire, Discrete Wire

#### View on TE.com >

Terminals & Splices > Splices

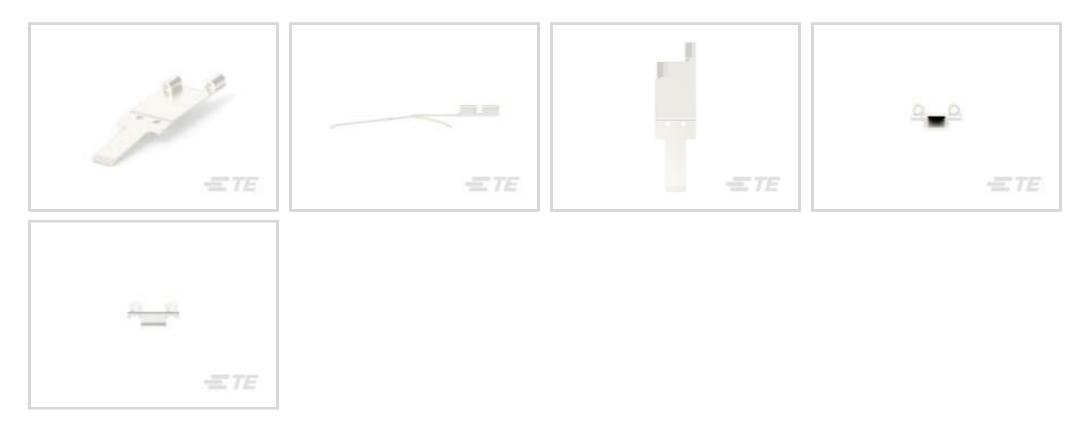

Wire Size: .5 – 1.25 mm<sup>2</sup>

Sealable: No

Splice Features: Serrated

Terminal Material Thickness: .51 mm [.021 in ]

#### Features

#### **Product Type Features**



Sealable	No	
Compatible With Discrete Wire Type	Stranded	
Wire Insulation Support Retention Type	Non-Insulation Support	
Configuration Features		
Number of Serrations	8	
Compatible With Wire & Cable Type	Discrete Wire	
Body Features		
Splice Features	Serrated	
Contact Features		
Terminal Plating Material	Silver	
Barrel Type	Open	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Wire Insulation Support	Without	

**C** For support call+1 800 522 6752

### 53112-1

Splices, 20 – 16 AWG Wire Size, .5 – 1.25 mm<sup>2</sup> Wire Size, Serrated, 8 Serration, Length 1.63 in [41.1 mm], Bag, Open, Stranded Wire, Discrete Wire



#### Dimensions

Wire Size	.5 – 1.25 mm²	
Terminal Material Thickness	.51 mm[.021 in]	
Product Length	41.1 mm[1.63 in]	
Usage Conditions		
Insulation Option	Uninsulated	
Industry Standards		
Government Qualified Splice	No	
Packaging Features		
Packaging Quantity	100	
Packaging Method	Bag	
Product Compliance For compliance documentation, visit the product page on TE.com>		

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	

Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

### 53112-1

Splices, 20 – 16 AWG Wire Size, .5 – 1.25 mm<sup>2</sup> Wire Size, Serrated, 8 Serration, Length 1.63 in [41.1 mm], Bag, Open, Stranded Wire, Discrete Wire




# **Compatible Parts**



# Customers Also Bought



TE Part #207234-1	TE Part #8-1393117-0	TE Part #1-1393118-3	TE Part #201369-4
UNASSM JS KIT,M SERIES	KUP-14A15-240=KU	KUP-14D15-12=KU	75 POS. PIN HOOD

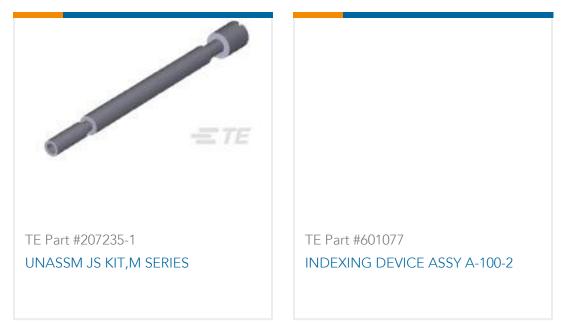

## Documents

Product Drawings FLAG RELAY, SPECIAL-RR 20-16

English

#### **CAD** Files

3D PDF

3D

### 53112-1

Splices, 20 – 16 AWG Wire Size, .5 – 1.25 mm<sup>2</sup> Wire Size, Serrated, 8 Serration, Length 1.63 in [41.1 mm], Bag, Open, Stranded Wire, Discrete Wire



**Customer View Model** 

ENG\_CVM\_CVM\_53112-1\_Z.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_53112-1\_Z.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_53112-1\_Z.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages RADIATION\_RESISTANT\_PRE-INSULATED\_TERMINALS\_SPLICES

English