




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR15/18	L.CHAN

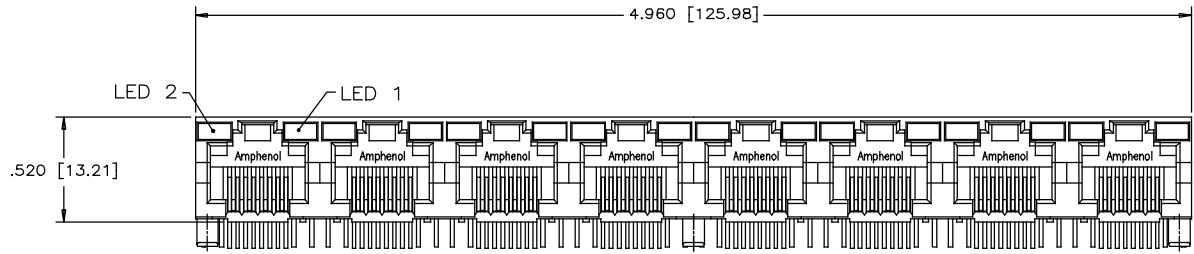


FRONT VIEW

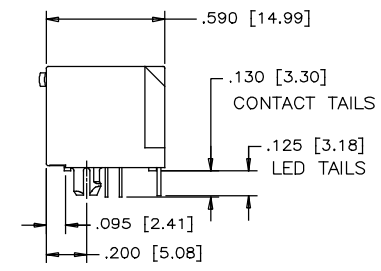


SIDE VIEW

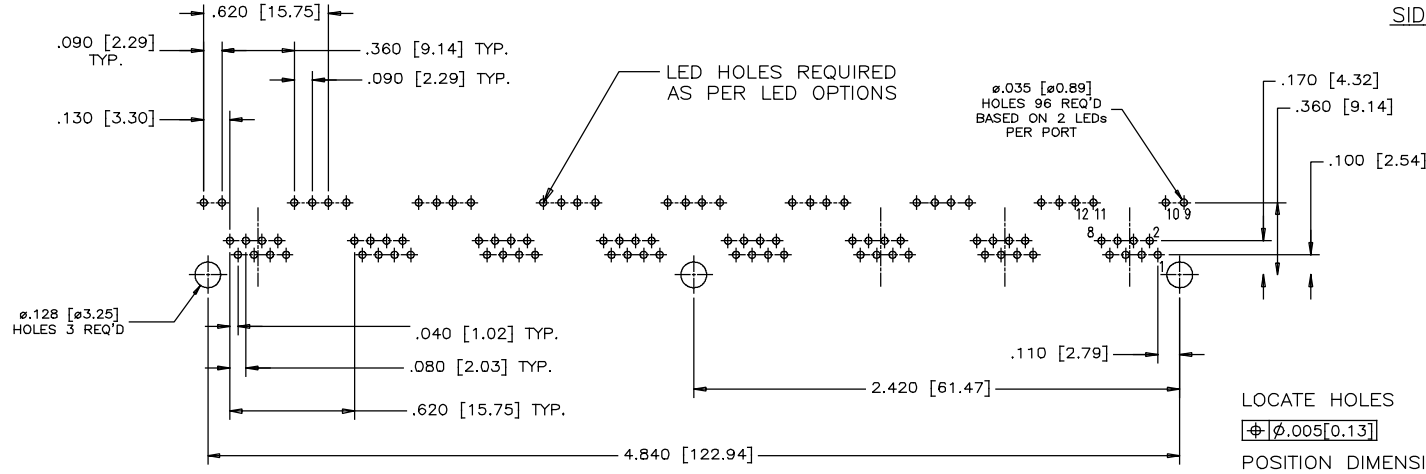

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

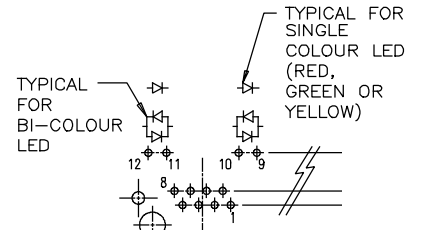


LED SCHEMATIC



BI-COLOUR LED DETAIL
(GREEN/YELLOW AND GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

LOCATE HOLES
 $\phi \pm 0.005 [0.13]$
 POSITION DIMENSIONS ARE BASIC

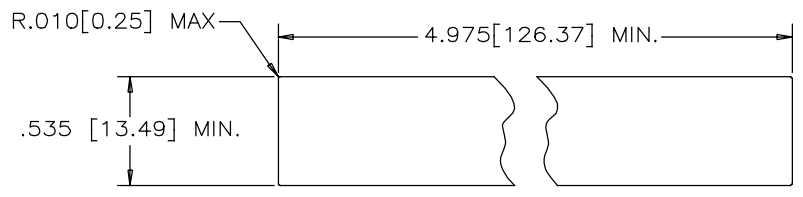

RECOMMENDED PANEL CUTOUT

PART NUMBER: RJHSE-X08X-A8

GOLD PLATING

REFER TO LED OPTIONS DRAWING FOR ORDERING CODES

- E=RJ45 FLAT CONTACT 6u"
- G=RJ45 FLAT CONTACT 15u"
- J=RJ45 FLAT CONTACT 30u"
- 5=RJ45 FLAT CONTACT 50u"

MATERIALS:
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0, COLOR BLACK

CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING ON MATING SURFACE.
 [SEE PART NUMBER FOR THICKNESS]
 50 μ" [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ" [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.



UNLESS SPECIFIED OTHERWISE	DRAWN W.QIU	DATE MAR15/18
PRIMARY UNITS INCH	CHECKED L.CHAN	MAR15/18
SECONDARY MILLIMETER	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APPR.	
1 DECIMAL PLACE ±0.025	ENG. REL. NO.	
2 DECIMAL PLACES ±0.020	REF.	
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION	
ANGULAR DEGREES ±1.0°	DO NOT SCALE DRAWING	

Amphenol Canada Corp.
 www.amphenolcanada.com

TITLE: EIGHT-PORT HIGH SPEED MODULAR JACK, 8 POSITIONS, 8 CONTACTS, UNSHIELDED WITH LED, 0.13" LONG CONTACT TAILS -RoHS COMPLIANT

DWG. NO. P-RJHSE-X08X-A8

REV A

CODE ID NO. 03554 | DWG SIZE: C | SCALE: N/A | SHEET 1 OF 1