



ANATECH ELECTRONICS, INC.

Manufacturer of RF & Microwave Filters and Products




40 MHz Crystal Filter

P/N: AM40CR246

Center Frequency (Fo):	40 MHz
Passband Bandwidth (1 dB):	+/- 8 KHz
Attenuation:	>40 dBc @ +/- 25 KHz
Insertion Loss:	<6 dB
Passband Ripple:	<1 dB
VSWR:	2.25:1
Input/output impedance:	50
Operating temperature:	-20 to +70°C

Outline Drawing:

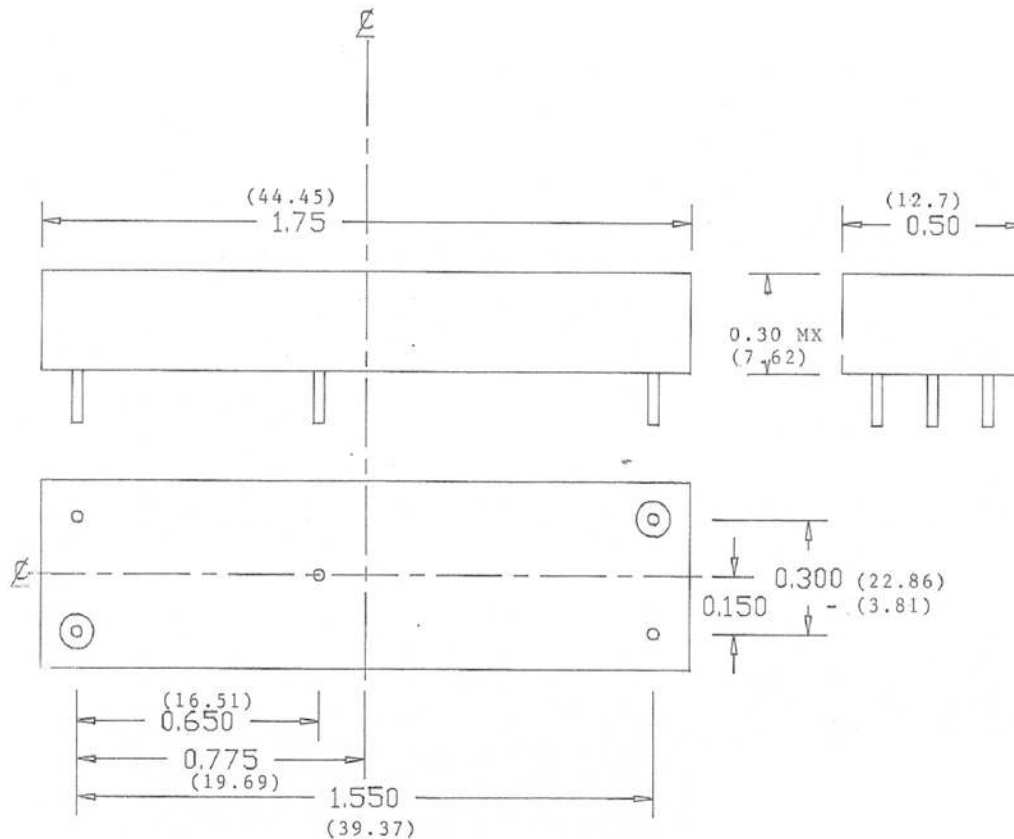

- NOTES:
1. .030" TERMINAL (TYP-2PL)
 2. .030" GROUND PIN (TYP-3PL)