
Unit: mm

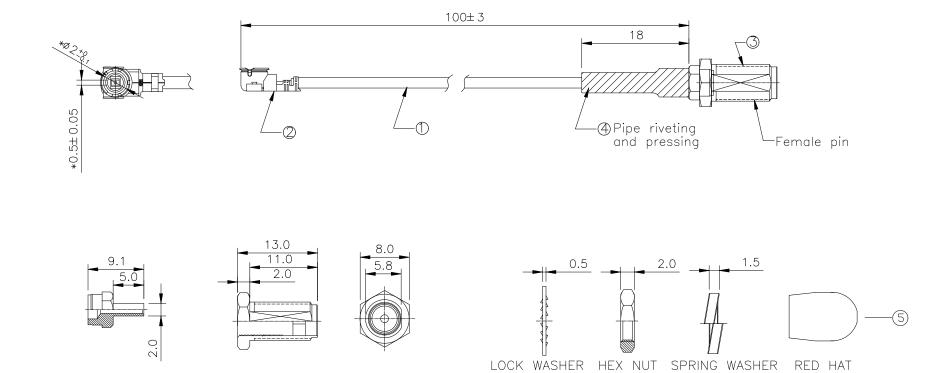

Note: parts in bulk, 100SET/bag

## ELECTRICAR CHARACTERISTICS REQUIREMENTS:

1.Product must be 100% conductionr,open

circuit short circuit test.

2.Conductive resistance:  $20\Omega$ 

3.Rated voltage: AC 60V

4. Withstand voltage: AC 200V

5.Insulation resistance:500m  $\Omega$ 

6.characteristic impedance:  $50\Omega$ 

7.Adopt environmental protection process and meet ROHS requirements

8. Tensile test: 1.5kg~

9. The general tolerance shall prevail if no tolerance is noted

				$\square$	oHS	Compliant		
	5	COVER	_	RED HAT PACKING SMA	1	_		
	4	HEAT SHRINK SLEEVE	ı	2.0*18MM BLACK HEAT SHEINK SLEEVE	1	_		
	3	SMA FEMALE	ı	11*1.78—ZYK—Back plug riveting and gold plating	1	_		
ınd	2	IPEX-1.78 CONN	ı	IPEX-1.78 BRASS GOLD	1	_		
	1	COAXIAL CABLE	I	RG1.78 BROWN-48-Double silver-PTFE	1	105		
)	ITEM	PART No.	VENDOR	DESCRIPTION	Q'TY	OVERALL		
	MATERIAL SPECIFICATION							

3			DRAWN BY	CHECKED BY	APPROVED BY	CONFIRMED BY	DESCR	IPTION	瀚国	<b>E股份有限公司</b>	CUST. CODE
2			LuLu 08/21.20'	Iron 08/21.20'	Iron 08/21.20'	Waleed 08/21.20'	RF CABLE	<b>\$</b>	CviLux Corporation		CUC
$\triangle$									DRAWING No.	CviLux P/N	CUSTOMER P/N
SYM	NAME DATE	REVISIONS					SHEET: 1	OF 1	DH50630A	DH-20G50016	_