



Figure similar

Non-reversing motor starter Size 1 3/4 Three phase full voltage Solid-state overload relay OLRelay amp range 10-40a 380-440/440-480V 50/60HZ coil Combination type 40AMP circuit breaker Encl NEMA type 4X 316 S-steel Water/dust tight noncorrosive Standard width enclosure

|   |   |
|---|---|
| product brand name  | Class 18 & 26   |
| design of the product   | Full-voltage non-reversing motor starter with motor circuit protector |
| special product feature   | ESP200 overload relay; Half-size controller                           |
| <b>General technical data</b>   |   |
| Height x Width x Depth [in]   | 24 × 11 × 8 in  |
| touch protection against electrical shock                               | NA for enclosed products  |
| installation altitude [ft] at height above sea level maximum            | 6560 ft   |
| ambient temperature [°F]  |   |
| • during storage  | -22 ... +149 °F   |
| • during operation  | -4 ... +104 °F  |
| ambient temperature   |   |
| • during storage  | -30 ... +65 °C  |
| • during operation  | -20 ... +40 °C  |
| <b>Horsepower ratings</b>   |   |
| yielded mechanical performance [hp] for 3-phase AC motor                |   |
| • at 200/208 V rated value  | 0 hp  |
| • at 220/230 V rated value  | 0 hp  |
| • at 460/480 V rated value  | 15 hp   |
| • at 575/600 V rated value  | 15 hp   |
| <b>Contactors</b>   |   |
| size of contactor   | Controller half size 1 3/4  |
| number of NO contacts for main contacts                                 | 3   |
| operating voltage for main current circuit at AC at 60 Hz maximum       | 600 V   |
| operational current at AC at 600 V rated value                          | 40 A  |
| mechanical service life (switching cycles) of the main contacts typical | 10000000  |
| <b>Auxiliary contact</b>  |   |
| number of NC contacts at contactor for auxiliary contacts               | 0   |
| number of NO contacts at contactor for auxiliary contacts               | 1   |
| number of total auxiliary contacts maximum                              | 8   |
| contact rating of auxiliary contacts of contactor according to UL       | 10A@600VAC (A600), 5A@600VDC (P600)                                   |
| <b>Coil</b>   |   |
| type of voltage of the control supply voltage                           | AC  |
| control supply voltage  |   |
| • at AC at 50 Hz rated value  | 380 ... 440 V   |
| • at AC at 60 Hz rated value  | 440 ... 480 V   |

|   |  |
|---|--|
| holding power at AC minimum   | 8.6 W  |
| apparent pick-up power of magnet coil at AC   | 218 VA   |
| apparent holding power of magnet coil at AC   | 25 VA  |
| operating range factor control supply voltage rated value of magnet coil  | 0.85 ... 1.1                                   |
| percental drop-out voltage of magnet coil related to the input voltage  | 50 %   |
| ON-delay time   | 19 ... 29 ms                                   |
| OFF-delay time  | 10 ... 24 ms                                   |
| <b>Overload relay</b>   |  |
| reset function  | Manual, automatic and remote                   |
| trip class  | CLASS 5 / 10 / 20 (factory set) / 30           |
| adjustable current response value current of the current-dependent overload release   | 10 ... 40 A                                    |
| make time with automatic start after power failure maximum  | 3 s  |
| relative repeat accuracy  | 1 %  |
| number of NC contacts of auxiliary contacts of overload relay   | 1  |
| number of NO contacts of auxiliary contacts of overload relay   | 1  |
| operational current of auxiliary contacts of overload relay <ul style="list-style-type: none"> <li>• at AC at 600 V</li> <li>• at DC at 250 V</li> </ul>                          | 5 A<br>1 A                                     |
| contact rating of auxiliary contacts of overload relay according to UL  | 5A@600VAC (B600), 1A@250VDC (R300)             |
| insulation voltage (Ui) <ul style="list-style-type: none"> <li>• with single-phase operation at AC rated value</li> <li>• with multi-phase operation at AC rated value</li> </ul> | 600 V<br>300 V                                 |
| <b>Enclosure</b>  |  |
| degree of protection NEMA rating  | 4X, 304 stainless steel                        |
| design of the housing   | dustproof, waterproof & resistant to corrosion |
| <b>Circuit Breaker</b>  |  |
| type of the motor protection  | Motor circuit protector (magnetic trip only)   |
| operational current of motor circuit breaker rated value  | 40 A   |
| adjustable current response value current of instantaneous short-circuit trip unit  | 115 ... 375 A                                  |
| <b>Mounting/wiring</b>  |  |
| mounting position   | Vertical                                       |
| fastening method  | Surface mounting and installation              |
| type of electrical connection for supply voltage line-side  | Box lug  |
| type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded  | 1x (10 AWG ... 1/0 AWG)                        |
| temperature of the conductor for supply maximum permissible   | 75 °C  |
| material of the conductor for supply  | AL or CU                                       |
| type of electrical connection for load-side outgoing feeder   | Screw-type terminals                           |
| tightening torque [lbf·in] for load-side outgoing feeder  | 45 ... 45 lbf·in                               |
| type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi-stranded   | 1x (14 ... 2 AWG)                              |
| temperature of the conductor for load-side outgoing feeder maximum permissible  | 75 °C  |
| material of the conductor for load-side outgoing feeder   | AL or CU                                       |
| type of electrical connection of magnet coil  | Screw-type terminals                           |
| tightening torque [lbf·in] at magnet coil   | 5 ... 12 lbf·in                                |
| type of connectable conductor cross-sections of magnet coil at AWG cables single or multi-stranded  | 2x (16 ... 12 AWG)                             |
| temperature of the conductor at magnet coil maximum permissible   | 75 °C  |
| material of the conductor at magnet coil  | CU   |
| type of electrical connection for auxiliary contacts  | Screw-type terminals                           |
| tightening torque [lbf·in] at contactor for auxiliary contacts  | 10 ... 15 lbf·in                               |


|  |   |
|--|---|
| type of connectable conductor cross-sections at contactor at AWG cables for auxiliary contacts single or multi-stranded      | 1x (12 AWG), 2x (16 ... 14 AWG), 2x (18 ... 16 AWG) |
| temperature of the conductor at contactor for auxiliary contacts maximum permissible   | 75 °C   |
| material of the conductor at contactor for auxiliary contacts  | CU  |
| type of electrical connection at overload relay for auxiliary contacts   | Screw-type terminals                                |
| tightening torque [lbf-in] at overload relay for auxiliary contacts  | 7 ... 10 lbf-in                                     |
| type of connectable conductor cross-sections at overload relay at AWG cables for auxiliary contacts single or multi-stranded | 2x (20 ... 14 AWG)                                  |
| temperature of the conductor at overload relay for auxiliary contacts maximum permissible                                    | 75 °C   |
| material of the conductor at overload relay for auxiliary contacts   | CU  |

**Short-circuit current rating**

|  |                                      |
|--|--------------------------------------|
| design of the short-circuit trip   | Instantaneous trip circuit breaker   |
| breaking capacity maximum short-circuit current (Icu)  |                                      |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 480 V</li> <li>• at 600 V</li> </ul> | 100 kA<br>100 kA<br>25 kA            |
| certificate of suitability   | NEMA ICS 2; UL 508; CSA 22.2, No. 14 |

**Further information**

- Industrial Controls - Product Overview (Catalogs, Brochures,...)**  
[www.usa.siemens.com/iccatalog](http://www.usa.siemens.com/iccatalog)
- Industry Mall (Online ordering system)**  
<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:18EUE92XH>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<https://support.industry.siemens.com/cs/US/en/ps/US2:18EUE92XH>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**  
[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=US2:18EUE92XH&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:18EUE92XH&lang=en)
- Certificates/approvals**  
<https://support.industry.siemens.com/cs/US/en/ps/US2:18EUE92XH/certificate>

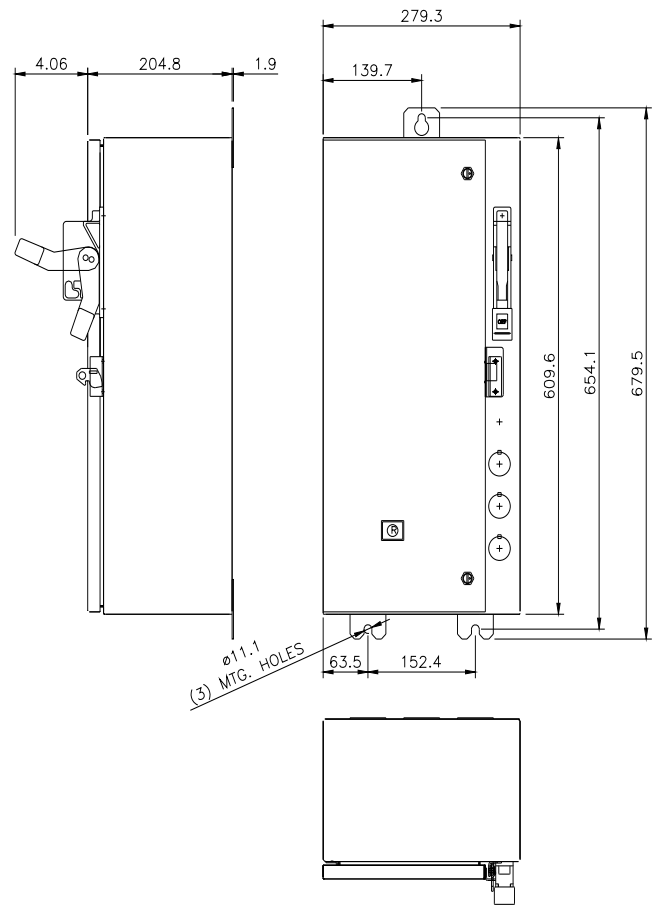



last modified:

1/25/2022