
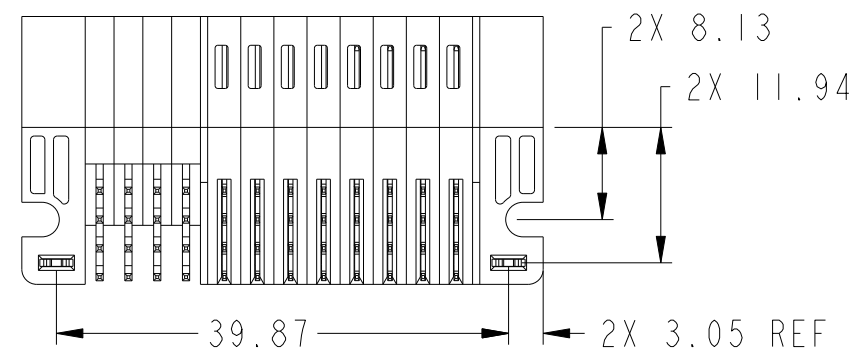
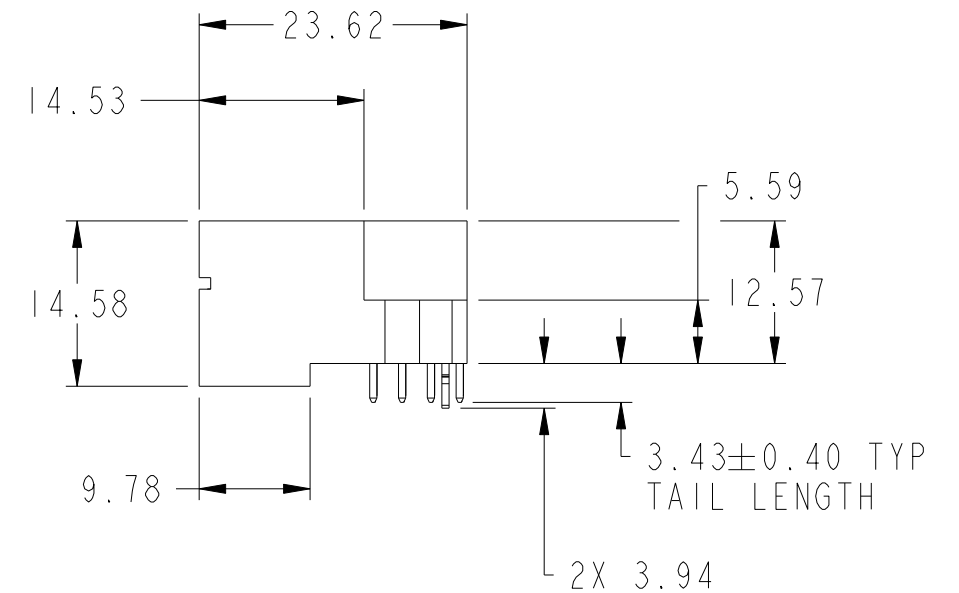
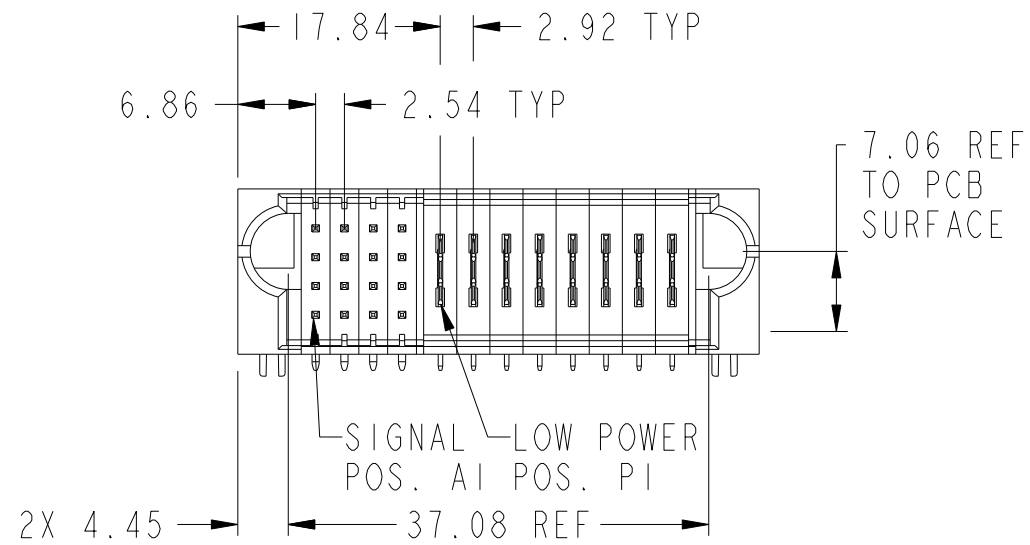


PRODUCT NUMBER SEE SHEET 2

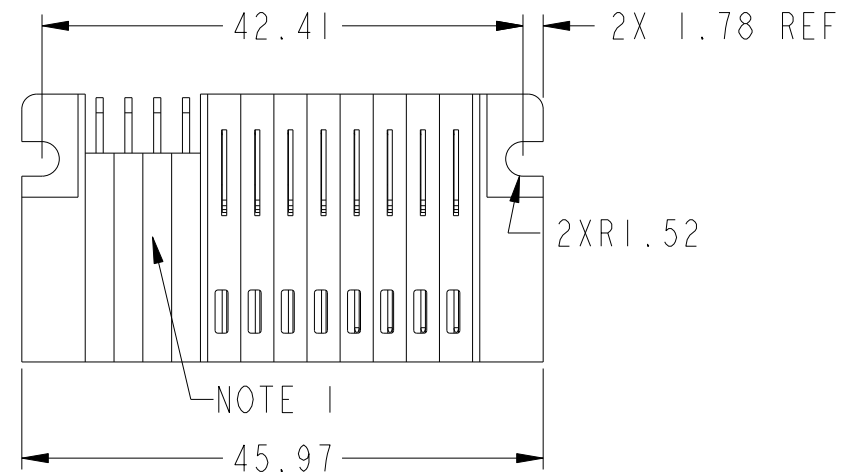


spec ref	dr	Sunny2 Liu	2017/06/05	projection	MM	size	A3	scale	3:2
tolerance std	eng	Sunny2 Liu	2017/09/14			ecn no	ELX-DG-27955-1	rel level	Released
ISO 406 ISO 1101	chr	Kaka Zhang	2017/09/20						
surface	linear	0.X	±0.5		title 16S + 8LP RA STB PLUG	dwg no 10106262-0804001	rev B	Product - Customer Drw	
		0.XXX	±0.10					cat. no.	sheet 1 of 3
ISO 1302	angular	0°	±2°	PDS: Rev :B		STATUS:Released		Printed: Sep 20, 2017	

Amphenol FCI

© 2016 AFCI

PRODUCT NO.	ROWS	S				LP								E2				
		E1	1	2	3	4	P1	P2	P3	P4	P5	P6	P7		P8			
10106262-0804001LF	DCBA	H	H	S	H	S	L	J	L	J	L	J	L	K	L	K	L	K
		G	S	T	G	G	L	J	L	J	L	J	L	K	L	K	L	K
		S	S	F	F	F	L	J	L	J	L	J	L	K	L	K	L	K
		R	R	E	E	E	L	J	L	J	L	J	L	K	L	K	L	K

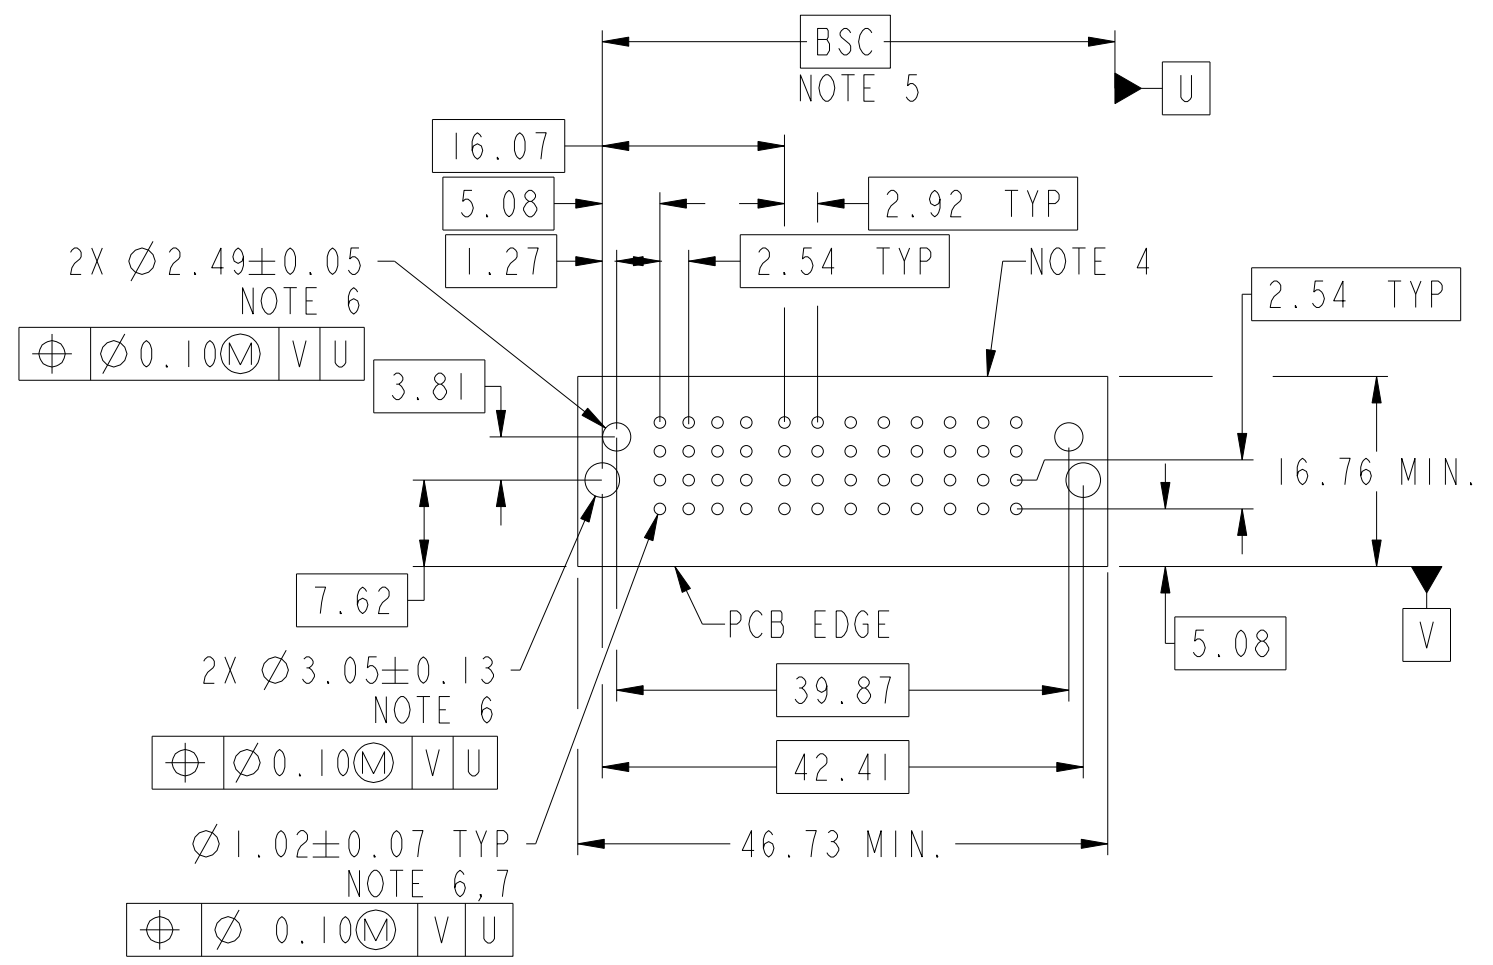

CODE	DESCRIPTION
E	MLBF SIGNAL CONTACT, ROW A (3.43)
F	MLBF SIGNAL CONTACT, ROW B (3.43)
G	MLBF SIGNAL CONTACT, ROW C (3.43)
GS	MLBF2 SIGNAL CONTACT, ROW C (3.43)
H	MLBF SIGNAL CONTACT, ROW D (3.43)
HA	METAL HOLD DOWN
HS	MLBF2 SIGNAL CONTACT, ROW D (3.43)
LJ	MFBL LOW POWER CONTACT (3.43)
LK	STD LOW POWER CONTACT (3.43)
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)

spec ref	dr	Sunny2 Liu	2017/06/05	projection	MM	size	A3	scale	3:2
tolerance std	eng	Sunny2 Liu	2017/09/14			ecn no	ELX-DG-27955-1	rel level	Released
ISO 406 ISO 1101	chr	Kaka Zhang	2017/09/20						
surface	TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Pei-Ming Zheng	2017/09/20	Amphenol FCI	title 16S + 8LP RA STB PLUG	dwg no 10106262-0804001	rev B	cat. no. Product - Customer Drw

Amphenol FCI

© 2016 AFCI

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 10) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

Amphenol
FCi

© 2016 AFCI

spec ref		dr	Sunny2 Liu	2017/06/05	projection	MM	size	A3	scale	3:2	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED					ecn no		ELX-DG-27955-1		
ISO 406	ISO 1101	eng	Sunny2 Liu	2017/09/14			product family		PwrBlade+		rel level
surface	linear	0.X	±0.5		Amphenol FCi	title 16S + 8LP RA STB PLUG	dwg no 10106262-0804001	rev B	cat. no.		Product - Customer Drw
		0.XX	±0.25						sheet 3 of 3		
		0.XXX	±0.10								
ISO 1302	angular	0°	±2°								