



Electrical Specifications

Center Frequency: 900 MHz
Bandwidth: 80 MHz
Pass Band: 860-940 MHz
Insertion Loss: 1.2 dB Max
Return Loss: 15 dB Min
Rejection: ≥30 dB @ 850,950 MHz
 ≥60 dB @ 840,960 MHz


Mechanical

Connector Type: SMA (F)
Dimensions: 6.11 x 2.56 x 1.89 Inches

Environmental

Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C
Shock: 20 G. 11 ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

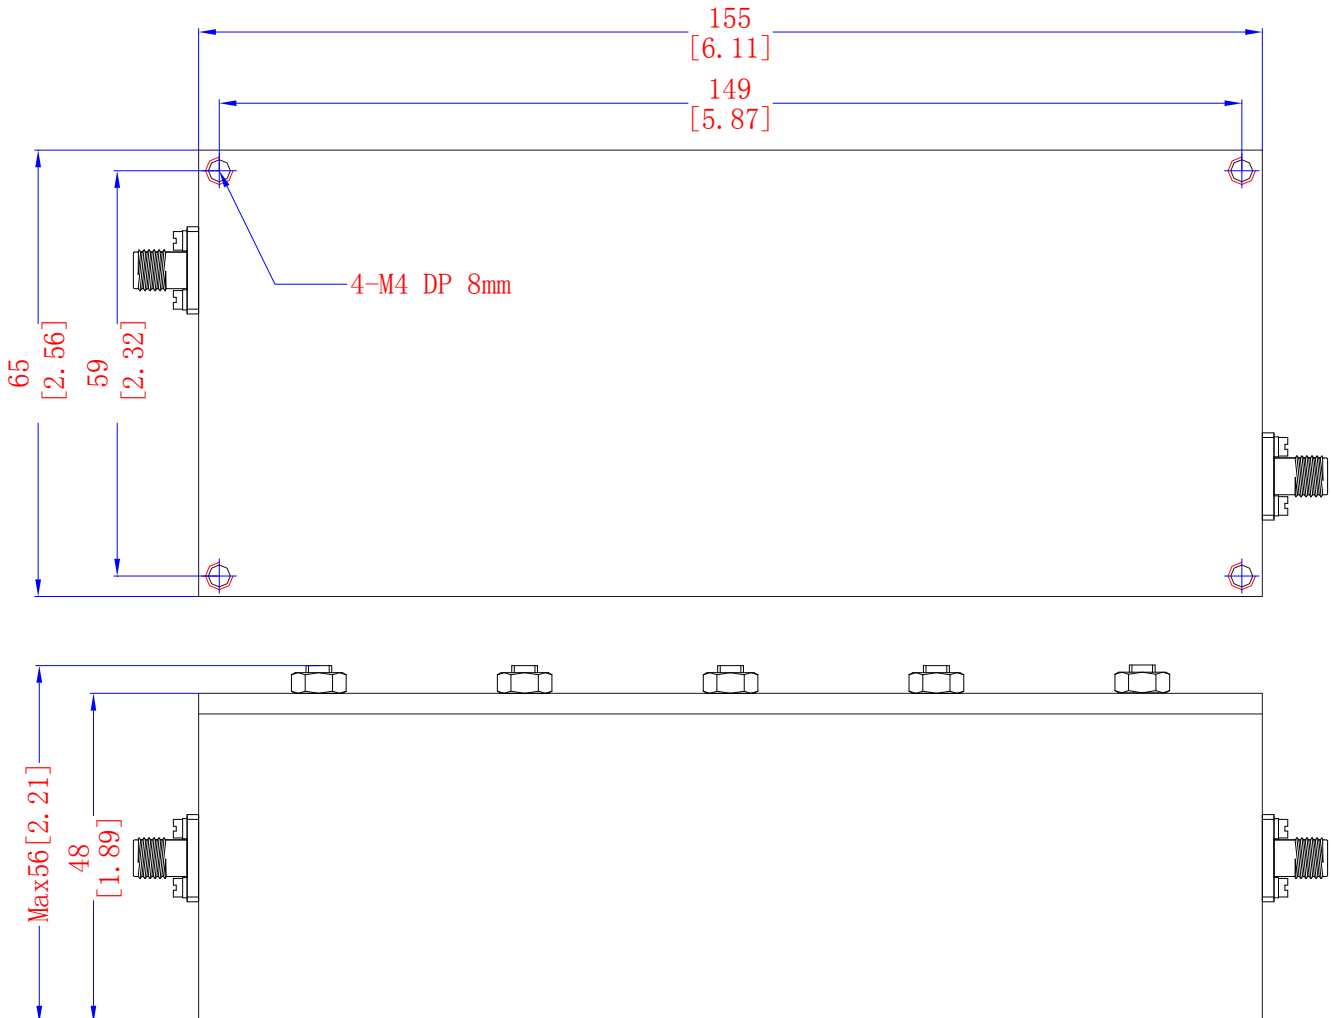



Response Plot:

