VIEW ON MATING SIDE

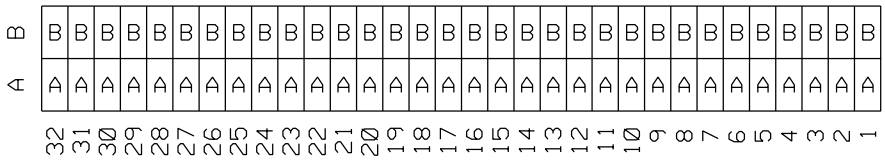

A = 32 STANDARD CONTACTS L=3
B = 32 STANDARD CONTACTS L=3

S = 64 TOTAL NUMBER OF CONTACTS

Marking	Standard
Performance level	G2/0 = Contact area level2 / Termination tin
Flux proof	no
Fixing clip	yes
Dimensions	SDA-85001-0001 sht.1
Technical Data	PS-85003-0001

B	G2/0	b1-32
A	G2/0	a1-32
Contact symbol	Perform. level	Contact position number

see ECN No. 2204
96/07/18 Ca

REVISIONS

LTR	FOR PREVIOUS REVISIONS SEE MRI LIST
C	

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ±2°

	INCH	METRIC
3 PLACE	± .	±
2 PLACE	± .	±
1 PLACE	± .	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DESIGN DIMENSION ☐ MM ☐ IN.

EQUIVALENT DIMENSION ☐ MM ☐ IN.

IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY

DRWG BY	Ca	SIGN
CHK'D BY	KN	SIGN
APP'D BY		SIGN
SCALE		

REVISE ONLY ON CAD SYSTEM | SH. | REV.

CADCAM PROJECT NAME s8500101 s91

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE
64 pos. Male connector
acc. DIN 41612 style B
contacts arrangement

molex® MOLEX EUROPE

SHEET NO. 1 OF 1

DATE 95/05/23

PART NO. 85001-0191

DWG NO. SDA-85001-0191

SIZE A