THIS DRAWING IS A CONTROLLED DOCUMENT.

LOC	DIST
J	—

REVISIONS 変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	P	REVISED PER ECO-11-005030	24MAR11	RK	HMR

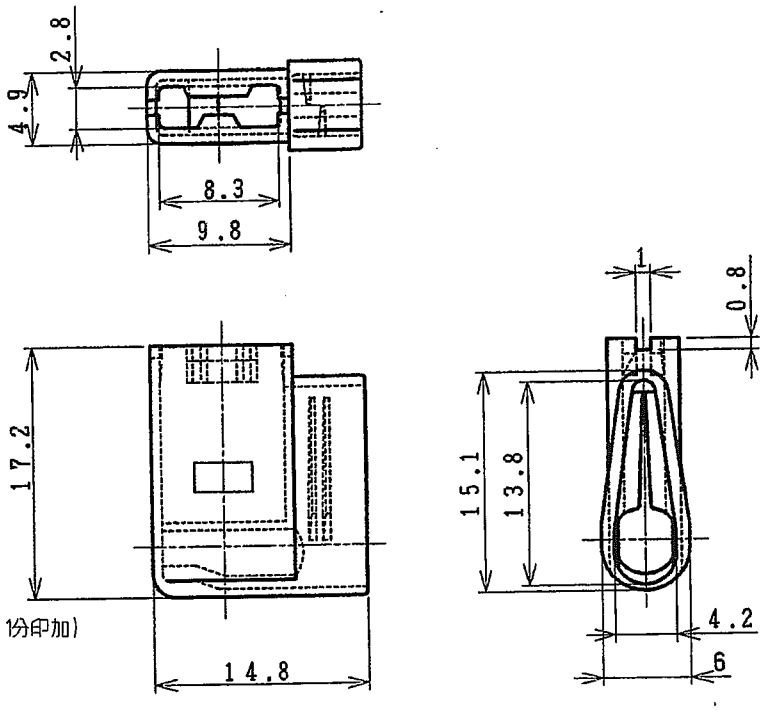

注記 ;
1. 本製品は射出成形品である
2. 一般公差：± 0.3
3. 適用コンタクト型番：175057
4. 温度範囲: TABLE 1 参照
5. 初期絶縁抵抗：5000MΩ以上 (DC500V 1分印加)
6. 初期耐電圧
   耐電圧：AC2.5KV 1分印加
   破壊電圧：AC3.3KV以上
7. スリーブの再使用は原則として禁止
8. 本製品に関する適用製品規格は用意しておりません。製品の使用に際しては、適用性について御確認の上決定下さい。

NOTES ;
1. THIS RARTS ARE INJECTION MOLDING ITEM
2. GENERAL TOLERANCE : ± 0.3
3. APPLICABLE RECEPTACLE P/N : 175057
4. TEMPERATURE LIMIT : SEE TABLE 1
5. INITIAL INSULATION RESISTANCE : 5000MΩ MIN. (DC500V FOR 1MINUTE)
6. INITIAL DIELECTRIC WITHSTAND VOLTAGE
   DIELECTRIC WITHSTAND VOLTAGE : AC2.5KV FOR 1MINUTE.
   PUNCTURE VOLTAGE : AC3.3KV MIN.
7. AS A RULE, REUSABILITY IS NOT ACCEPTABLE
8. THIS PRODUCT IS NOT PREPARED THE PRODUCT SPECIFICATION. THEREFORE, PLEASE USE THIS PRODUCT AFTER CONSIDERING THE APPLICABILITY OF THIS PRODUCT.

4 TABLE 1

温度範囲 TEMPERATURE LIMIT	P/N 1717268-1	P/N 1717268-2
使用温度範囲 OPPERATING TEMPERATURE LIMIT	-40℃～105℃	-40℃～60℃
保管温度範囲 STORAGE TEMPERATURE LIMIT	-40℃～50℃	-40℃～50℃
作業温度範囲 WORKING TEMPERATURE LIMIT	5℃～50℃	5℃～50℃

色 COLOR	材料 MATERIAL	型番 P/N
黄 YELLOW	PVC(軟質) PVC(SOFT) UL94V-0	1717268-2
青 BLUE	PVC(軟質) PVC(SOFT) UL94V-0	1717268-1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - ALL RIGHTS RESERVED.

DIMENSIONS: 単位：粍 MM
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

DWN	T.HATANO	06MAY2003
CHK	N.YAMASAKI	06MAY2003
APVD	M.SHINDO	06MAY2003
PRODUCT SPEC 製品規格	—	
APPLICATION SPEC 取付適用規格	—	
WEIGHT		

MATERIAL 材料: SEE TABLE
FINISH 仕上: —

TE Connectivity

NAME 名称: INSULATION SLEEVE INJECTION TYPE FOR 250 SERIES FLAG POSITIVE LOCK EX REC.

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A4	00779	C-1717268	—

CUSTOMER DRAWING

SCALE 尺度	SHEET	OF	REV
2:1	1	1	P