


D-SUBMINIATURE CONNECTORS:
K66XHT Series
 High Temperature Right Angle PCB Mount

K66XHT Series Dimensions
 Dimensions in mm

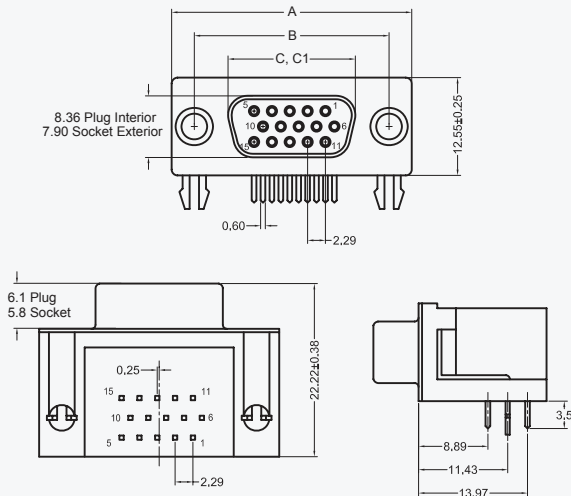

Shell Size	Dimensions (mm)					
	A	B	C	C1	D	E
15 (E)	1.213 ±.015 30.81 ±0.38	.984 ±.005 24.99 ±0.13	.643 ±.010 16.33 ±0.25	.666 ±.010 16.92 ±0.25	.090 ±.005 2.29 ±0.13	.010 ±.005 0.25 ±0.13
26 (A)	1.541 ±.015 39.14 ±0.38	1.312 ±.005 33.32 ±0.13	.971 ±.010 24.66 ±0.25	.994 ±.010 25.25 ±0.25	.090 ±.005 2.29 ±0.13	.020 ±.005 0.51 ±0.13
44 (B)	2.088 ±.015 53.04 ±0.38	1.852 ±.005 47.04 ±0.13	1.511 ±.010 38.38 ±0.25	1.534 ±.010 38.96 ±0.25	.090 ±.005 2.29 ±0.13	.020 ±.005 0.51 ±0.13
62 (C)	2.729 ±.015 69.32 ±0.38	2.500 ±.005 63.50 ±0.13	2.159 ±.010 54.84 ±0.25	2.182 ±.010 55.42 ±0.25	.095 ±.005 2.41 ±0.13	.023 ±.005 0.58 ±0.13

C = Exterior of Female Shell (S)
 C1 = Interior of Male Shell (P)

Generated Part Number

K66XHT-E15P-N

Part Number Builder

K66XHT	-	E15	P	N
Series		Shell Size Contact	Contact Type	Mounting Option

Series

K66XHT - Reflow Compatible Version

Shell Size-Contact Option

- ┌ - 15 Contacts
- ┌ - 26 Contacts
- ┌ - 44 Contacts

Contact Type

- P - Pin Contact (Plug)
- S - Socket Contact (Receptacle)

Mounting Option

- N - With Boardlocks and #4-40 UNC Threaded Inserts
- NJ - With Boardlocks and #4-40 Jackscrews Installed

Contact Kycon for VESA and Other Options