

FL MXT


Order No.: 2832331



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2832331>

Expansion, 8 Ethernet ports

Ethernet

| Commercial data | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 929107 |
| Note | Made-to-order |
| sales group | K000 |
| Pack | 1 pcs. |
| Customs tariff | 85176200 |
| Catalog page information | Page 187 (AX-2009) |

Product notes

WEEE/RoHS-compliant since:
01/16/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| Interfaces | |
|----------------------|---------------------------------------|
| Interface | Ethernet |
| Type of connection | 8 ports via FL IF (interface) modules |
| Transmission physics | Copper |
| Transmission speed | 10/100 MBit/s |

| | |
|----------------------|---|
| Signal LEDs | Data receive, link status |
| Interface | Ethernet FO |
| Type of connection | Via interface modules |
| Transmission physics | Multimode glass fiber |
| Transmission speed | 100 MBit/s (full duplex) |
| Transmission length | Up to 10000 m (For single mode glass fiber: 36,000 m) |

Function

| | |
|----------------------------------|---|
| Basic functions | Extension module for Modular Managed Switch |
| Status and diagnostic indicators | LEDs for media modules |

Supply voltage

| | |
|-----------------------------|--------------------|
| Typical current consumption | (via head station) |
|-----------------------------|--------------------|

General data

| | |
|--|----------------------------------|
| Weight | 550 g |
| Width | 127 mm |
| Height | 95 mm |
| Depth | 115 mm |
| Degree of protection | IP20 |
| Ambient temperature (operation) | 0 °C ... 55 °C (no condensation) |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Permissible humidity (operation) | 10 % ... 95 % (no condensation) |
| Permissible humidity (storage/transport) | 10 % ... 95 % (no condensation) |
| Housing material | PA 6.6 |
| Noise emission | EN 61000-6-3/-4 |
| Noise immunity | EN 61000-6-2:2005 |

Mechanical tests

| | |
|--------------|--|
| Type of test | Shock test in acc. with IEC 60068-2-27 |
| Test result | Operation: 25 g, 11 ms duration, semi-sinusoidal shock impulse |
| Type of test | Shock test in acc. with IEC 60068-2-27 |
| Test result | Storage/Transport: 50 g, 11 ms duration, semi-sinusoidal shock impulse |
| Type of test | Vibration resistance in acc. with IEC 60068-2-6 |
| Test result | Operation: 5g, 150 Hz, criterion A |
| Type of test | Free fall in acc. with IEC 60068-2-32 |
| Test result | 1 m |

| | |
|--------------|---|
| Type of test | Vibration resistance in acc. with IEC 60068-2-6 |
| Test result | Storage/transport: 5g, 150 Hz, criterion C |

Conformity with EMC directives

| | |
|---------------------------------|--|
| Developed in acc. with standard | IEC 61000-6.2 |
| Test standard | IEC 61000-4-2 (ESD) |
| Test result | Criterion B |
| Test standard | IEC 61000-4-3 (immunity to radiated interference) |
| Test result | Criterion A |
| Test standard | IEC 61000-4-4 (burst) |
| Test result | Criterion A |
| Test standard | IEC 61000-4-5 (surge) |
| Test result | Criterion A |
| Test standard | IEC 61000-4-6 (immunity to conducted interference) |
| Test result | Criterion A |
| Test standard | EN 55022 (emitted interference) |
| Test result | Class A |

Certificates / Approvals



Certification: ABS, CUL, UL
 Certification Ex: CUL-EX LIS, UL-EX LIS


Accessories

| Item | Designation | Description |
|----------------|-------------------|--|
| General | | |
| 2832425 | FL IF 2FX SC-D | FO media module for connecting 100Base-FX multimode glass fibers (1300 nm), connection direction downwards |
| 2832412 | FL IF 2FX SC-F | FO media module for connecting 100Base-FX multimode glass fibers (1300 nm), connection direction forwards |
| 2832205 | FL IF 2FX SM SC-D | FO interface module for connecting single mode (monomode) glass fibers (1300 nm) to the Factoryline Modular Managed Switch, output downwards |

| | | |
|---------|-------------------|--|
| 2884033 | FL IF 2FX ST-D | Interface module |
| 2832357 | FL IF 2TX VS-RJ-D | Media module with two twisted pair ports for the modular managed switch system |
| 2832344 | FL IF 2TX VS-RJ-F | Media module with two twisted-pair ports for the modular managed switch system, output towards the front |
| 2832483 | FL IF MEM 2TX-D | Memory module, 2 port twisted pair module for saving the switch configuration |
| 2832331 | FL MXT | Expansion, 8 Ethernet ports |

Diagrams/Drawings

Dimensioned drawing

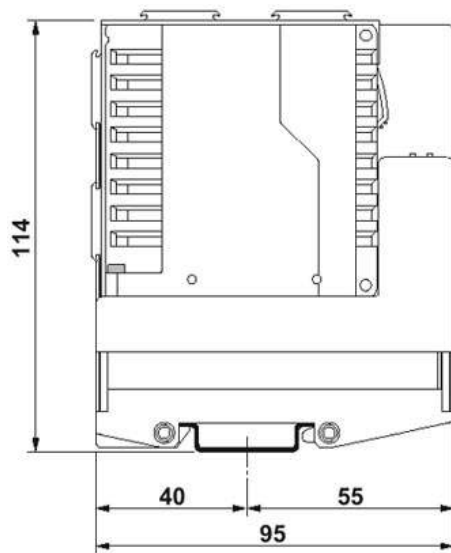

The illustration shows the extension module FL MXT with the head station FL SWITCH MM HS and the interface module fitted

FL MXT Order No.: 2832331

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2832331>

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;