
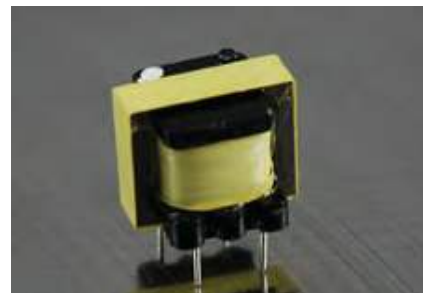



## AEE19-3460

## High Frequency Transformer

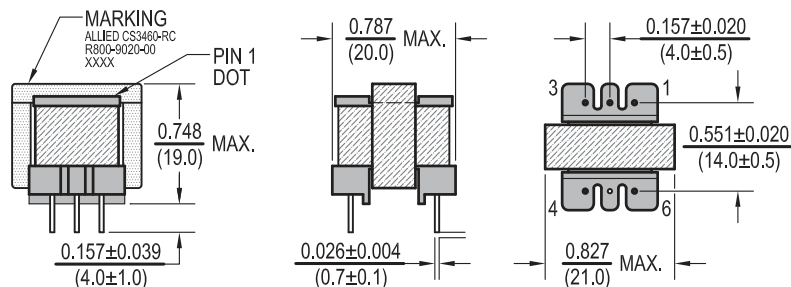

## ELECTRICAL SPECIFICATIONS:

1. INDUCTANCE: 1KHz/0.1V (HP-4284A)
  - 1 - 3: 10.0 K OHM  $\pm$  20%
  - 6 - 4: 10 K OHM (LOAD)
2. DCR: (AT 25°C CH-502A)
  - 1 - 3: 820 OHM  $\pm$  20%
  - 6 - 4: 1.08 K OHM  $\pm$  20%
3. HI-POT TEST:
  - PRI TO SEC : AC 1000V 1mA FOR 1 SEC
  - CORE TO COIL : AC 1000V 1mA FOR 1 SEC
4. INSULATION TEST:
  - COIL TO COIL & CORE : 100 mOHM MIN BY DC 500V
5. GAP : CORE CENTER GAP
  - PRI : SEC = 1:1
6. GAP : CORE NO GAP



## NOTE:

1. CORE FIX TAPE 2TS
2. PIN 5 CUT OFF
3. PIN 1 DOT

