


Ŧ	Q	<u>п</u>	m	D	0



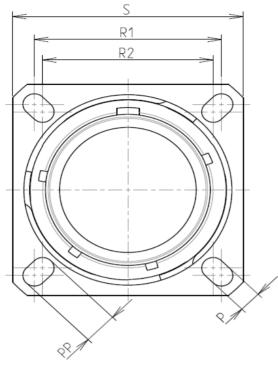



CHARACTERISTICS

4

_

ω

 \sim

_

_

-Shell Material	: Stainless Steel			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8 μm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	: -65°C to +200°C			

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g

T Q T	m	D	0		•	
	S R1 R2 C C C C C C C C C C C C C C C C C C		<image/> <image/>	AMPLE		4
Keyin CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	ng Shown as example Connector dimension Dim Nominal					
-Shell Material: Stainless Steel-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy	P 3.25±0.2 PP 4.93±0.2 R1 23.01 R2 20.62 S 28.6±0.3 V 20.83±0/-1.25		SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati	ch does not comply with the Parties or by a third party		
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles	W 2.1/2.5 Z 31.5 Max VV THREAD M18x1-6g		PN: 8D013S	Not Listed		2
-Delivered without Souriau contacts -Temperature Range : -65°C to +200°C -Salt Spray : 500 hours			First Release			_
		ISS DATE Designed By: TITLE	Latest modification - by Date: Stainless Ste	customer drawing el Receptacle 8D series	MOD N°	
BASIC SERIES: 8D 0 - 13 S 03 P SHELL TYPE : Square Flange Receptacle	A L Delivered W/O Contacts	SCALE -	General linear Tolerances: ±	NPRDS / PROJECT 859	roports: of	1
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	ORIENTATION : A CONTACT TYPE : PIN(500 Matings)	SUURIAU	WWW.SOURIAU.C	communicated without	luced or permission	_
PLATING : S = Nickel	CONTACT LAYOUT : 13-03	A3	SOURIAU 8D013S0		SHEET	

r	Ŧ	۵	п П	m	D	0	
		Contact Layout					Panel Cutou
4		03 ())) 3#16				SQUARE FLANGE RECEPTACLE (TYPE 0 REAR MOUNTING	
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47					m
ω						Ø ØA R Ø	4A 1
	–				[
						SOURIAU shall not be due to a use of the the Specifications issue (professional r	e Products wh ed by either of
N							Countr FR
						PN: 8	8D013S
					A 15-1	0-2016 First Release	
					ISS E Designed By:	ATE Latest modification - by Date:	/
					ТІТІ	e Sta	inless Ste
<u> </u>					SCALE NA		eneral linear Tolerances: ±
					SOUR	IAU WWW.SO	URIAU.C
					FORMAT A3		DURIAU D013S0
L	Н	G	F	E	D	С	

