

**Revision History****1024K x 8 BIT SUPER LOW POWER CMOS SRAM**

Revision	Details	Date
Rev 1.0	Initial Release	Nov 2020

## FEATURES

- Fast access time: 45/55ns
- Low power consumption:  
 Operating current: 12/11mA (Typ.)  
 Standby current: 2.5µA (Typ.)
- Single 2.7V ~ 3.6V power supply
- All inputs and outputs TTL compatible
- Fully static operation
- Tri-state output
- Data retention voltage: 1.5V (Min.)
- Package: 44-pin 400 mil TSOP II

## GENERAL DESCRIPTION

The AS6C8008B is an 8,388,608-bit low power CMOS static random access memory organized as 1,048,576 words by 8 bits. It is fabricated using very high performance, high reliability CMOS technology. Its standby current is stable within the range of operating temperature.


The AS6C8008B is well designed for very low power system applications, and particularly well suited for battery back-up nonvolatile memory application.

The AS6C8008B operates from a single power supply of 2.7V ~ 3.6V and all inputs and outputs are fully TTL compatible

## PRODUCT FAMILY

Product Family	Operating Temperature	V <sub>CC</sub> Range	Speed	Power Dissipation	
				Standby (I <sub>SB1</sub> , Typ.)	Operating (I <sub>CC</sub> , Typ.)
AS6C8008B	-40 ~ 85°C	2.7 ~ 3.6V	45ns	2.5µA	12mA
AS6C8008B	-40 ~ 85°C	2.7 ~ 3.6V	55ns	2.5µA	11mA


## FUNCTIONAL BLOCK DIAGRAM

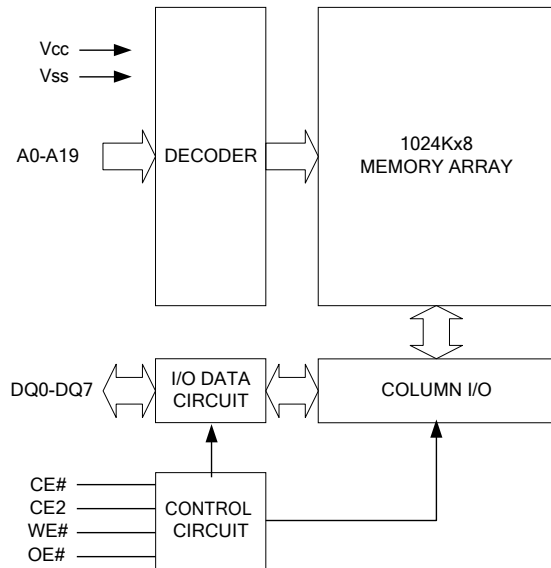

## PIN DESCRIPTION

SYMBOL	DESCRIPTION
A0 - A19	Address Inputs
DQ0 - DQ7	Data Inputs/Outputs
CE#, CE2	Chip Enable Inputs
WE#	Write Enable Input
OE#	Output Enable Input
V <sub>CC</sub>	Power Supply
V <sub>SS</sub>	Ground
NC	No Connection

## PIN CONFIGURATION

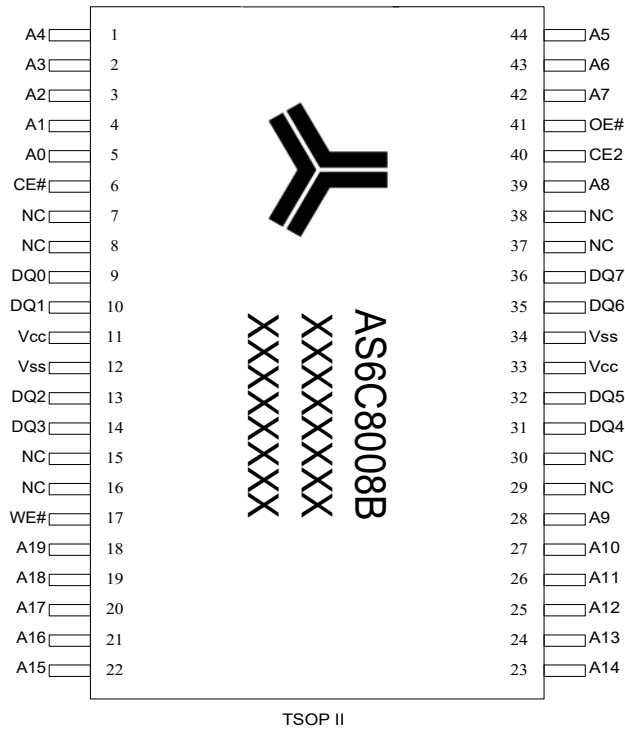

## ABSOLUTE MAXIMUM RATINGS\*

PARAMETER	SYMBOL	RATING	UNIT
Voltage on $V_{CC}$ relative to $V_{SS}$	$V_{T1}$	-0.5 to 4.6	V
Voltage on any other pin relative to $V_{SS}$	$V_{T2}$	-0.5 to $V_{CC}+0.5$	V
Operating Temperature	$T_A$	-40 to 85	°C
Storage Temperature	$T_{STG}$	-65 to 150	°C
Power Dissipation	$P_D$	1	W
DC Output Current	$I_{OUT}$	50	mA

\*Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect device reliability.

## TRUTH TABLE

MODE	CE#	CE2	OE#	WE#	I/O OPERATION	SUPPLY CURRENT
Standby	H	X	X	X	High-Z	$I_{SB1}$
	X	L	X	X	High-Z	$I_{SB1}$
Output Disable	L	H	H	H	High-Z	$I_{CC}, I_{CC1}$
Read	L	H	L	H	$D_{OUT}$	$I_{CC}, I_{CC1}$
Write	L	H	X	L	$D_{IN}$	$I_{CC}, I_{CC1}$

Note: H =  $V_{IH}$ , L =  $V_{IL}$ , X = Don't care.

## DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP. <sup>*4</sup>	MAX.	UNIT	
Supply Voltage	$V_{CC}$		2.7	3.0	3.6	V	
Input High Voltage	$V_{IH}^{*1}$		2.2	-	$V_{CC}+0.5$	V	
Input Low Voltage	$V_{IL}^{*2}$		- 0.2	-	0.6	V	
Input Leakage Current	$I_{LI}$	$V_{CC} \cong V_{IN} \cong V_{SS}$	- 1	-	1	$\mu A$	
Output Leakage Current	$I_{LO}$	$V_{CC} \cong V_{OUT} \cong V_{SS}$ Output Disabled	- 1	-	1	$\mu A$	
Output High Voltage	$V_{OH}$	$I_{OH} = -1mA$	2.2	2.7	-	V	
Output Low Voltage	$V_{OL}$	$I_{OL} = 2mA$	-	-	0.4	V	
Average Operating Power supply Current	$I_{CC}$	Cycle time = Min. $CE\# \leq 0.2V$ and $CE2 \geq V_{CC}-0.2V$ $I_{I/O} = 0mA$ Other pins at 0.2V or $V_{CC}-0.2V$	- 45	-	12	20	mA
			- 55	-	11	18	mA
	$I_{CC1}$	Cycle time = $1\mu s$ $CE\# \leq 0.2V$ and $CE2 \geq V_{CC}-0.2V$ $I_{I/O} = 0mA$ Other pins at 0.2V or $V_{CC}-0.2V$	-	3	5	mA	
Standby Power Supply Current	$I_{SB1}$	$CE\# \geq V_{CC} - 0.2V$ or $CE2 \leq 0.2V$ Other pins at 0.2V or $V_{CC} - 0.2V$	<sup>*5</sup> 40°C	-	2.5	5	$\mu A$
				-	2.5	20	$\mu A$

Notes:

- $V_{IH}(\max) = V_{CC} + 3.0V$  for pulse width less than 6ns.
  - $V_{IL}(\min) = V_{SS} - 3.0V$  for pulse width less than 6ns.
  - Over/Undershoot specifications are characterized, not 100% tested.
  - Typical values are included for reference only and are not guaranteed or tested.
- Typical values are measured at  $V_{CC} = V_{CC}(\text{TYP.})$  and  $T_A = 25^\circ C$
- This parameter is measured at  $V_{CC} = 3.0V$

## CAPACITANCE ( $T_A = 25^\circ C$ , $f = 1.0MHz$ )

PARAMETER	SYMBOL	MIN.	MAX	UNIT
Input Capacitance	$C_{IN}$	-	6	pF
Input/Output Capacitance	$C_{I/O}$	-	8	pF

Note : These parameters are guaranteed by device characterization, but not production tested.

## AC TEST CONDITIONS

Input Pulse Levels	0.2V to $V_{CC} - 0.2V$
Input Rise and Fall Times	3ns
Input and Output Timing Reference Levels	1.5V
Output Load	$C_L = 30pF + 1TTL$ , $I_{OH}/I_{OL} = -1mA/2mA$

## AC ELECTRICAL CHARACTERISTICS

### (1) READ CYCLE

PARAMETER	SYM.	AS6C8008B-45		AS6C8008B-55		UNIT
		MIN.	MAX.	MIN.	MAX.	
Read Cycle Time	$t_{RC}$	45	-	55	-	ns
Address Access Time	$t_{AA}$	-	45	-	55	ns
Chip Enable Access Time	$t_{ACE}$	-	45	-	55	ns
Output Enable Access Time	$t_{OE}$	-	25	-	30	ns
Chip Enable to Output in Low-Z	$t_{CLZ}^*$	10	-	10	-	ns
Output Enable to Output in Low-Z	$t_{OLZ}^*$	5	-	5	-	ns
Chip Disable to Output in High-Z	$t_{CHZ}^*$	-	15	-	20	ns
Output Disable to Output in High-Z	$t_{OHZ}^*$	-	15	-	20	ns
Output Hold from Address Change	$t_{OH}$	10	-	10	-	ns


### (2) WRITE CYCLE

PARAMETER	SYM.	AS6C8008B-45		AS6C8008B-55		UNIT
		MIN.	MAX.	MIN.	MAX.	
Write Cycle Time	$t_{WC}$	45	-	55	-	ns
Address Valid to End of Write	$t_{AW}$	40	-	50	-	ns
Chip Enable to End of Write	$t_{CW}$	40	-	50	-	ns
Address Set-up Time	$t_{AS}$	0	-	0	-	ns
Write Pulse Width	$t_{WP}$	35	-	45	-	ns
Write Recovery Time	$t_{WR}$	0	-	0	-	ns
Data to Write Time Overlap	$t_{DW}$	20	-	25	-	ns
Data Hold from End of Write Time	$t_{DH}$	0	-	0	-	ns
Output Active from End of Write	$t_{OW}^*$	5	-	5	-	ns
Write to Output in High-Z	$t_{WHZ}^*$	-	15	-	20	ns


\*These parameters are guaranteed by device characterization, but not production tested.

## TIMING WAVEFORMS

### READ CYCLE 1 (Address Controlled) (1,2)

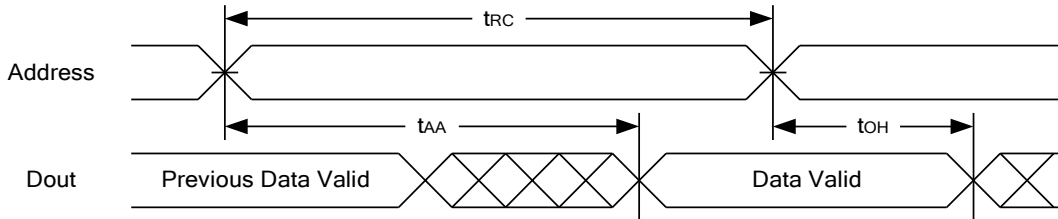


### READ CYCLE 2 (CE# and CE2 and OE# Controlled) (1,3,4,5)

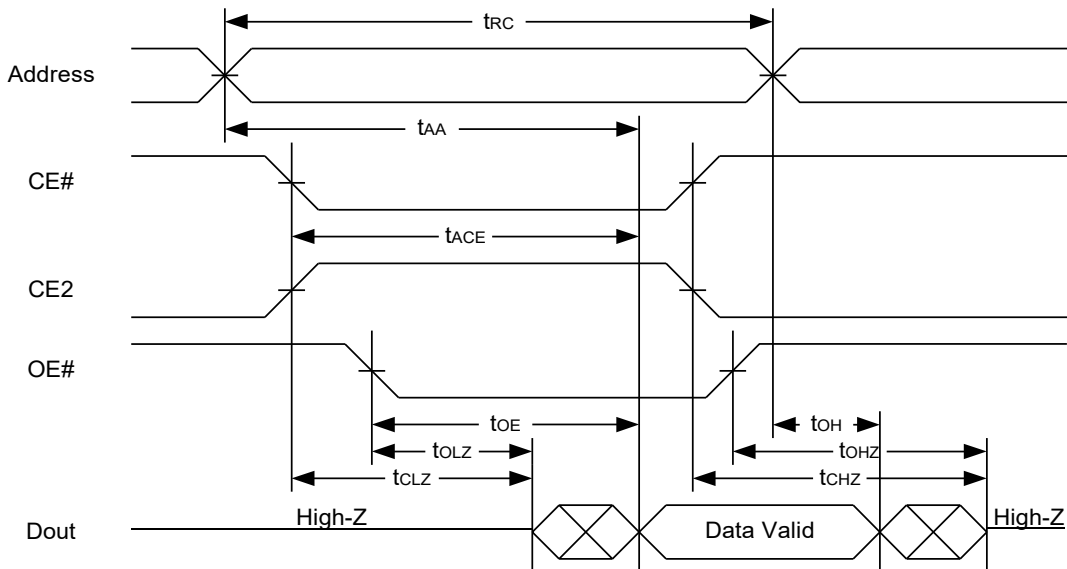


**Notes :**

1. WE# is high for read cycle.
2. Device is continuously selected OE# = low, CE# = low., CE2 = high.
3. Address must be valid prior to or coincident with CE# = low, CE2 = high; otherwise  $t_{AA}$  is the limiting parameter.
4.  $t_{CLZ}$ ,  $t_{OLZ}$ ,  $t_{CHZ}$  and  $t_{OHZ}$  are specified with  $C_L = 5\text{pF}$ . Transition is measured  $\pm 500\text{mV}$  from steady state.
5. At any given temperature and voltage condition,  $t_{CHZ}$  is less than  $t_{CLZ}$ ,  $t_{OHZ}$  is less than  $t_{OLZ}$ .

### WRITE CYCLE 1 (WE# Controlled) (1,2,4,5)

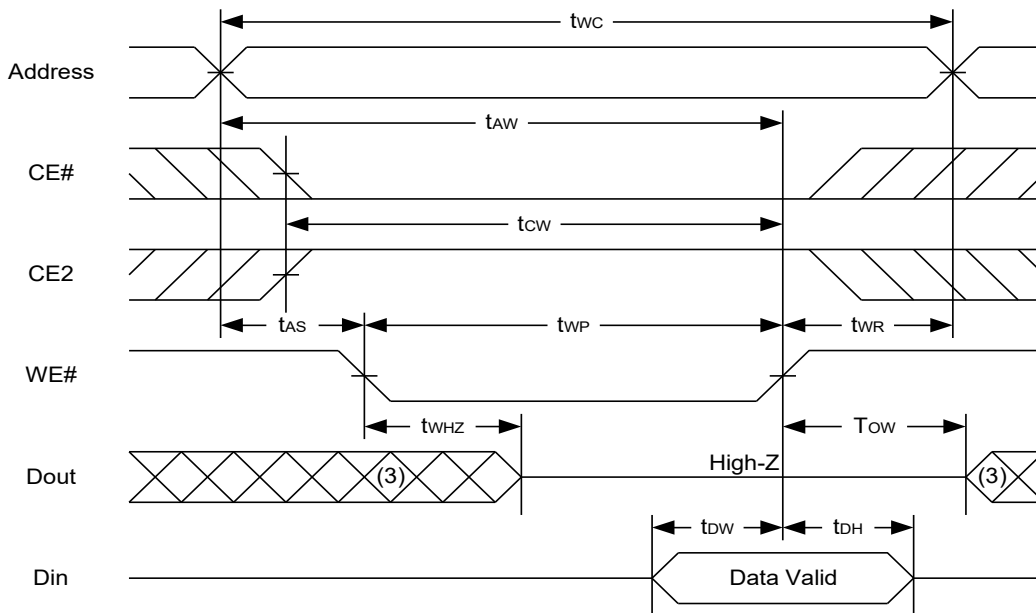

### WRITE CYCLE 2 (CE# and CE2 Controlled) (1,4,5)

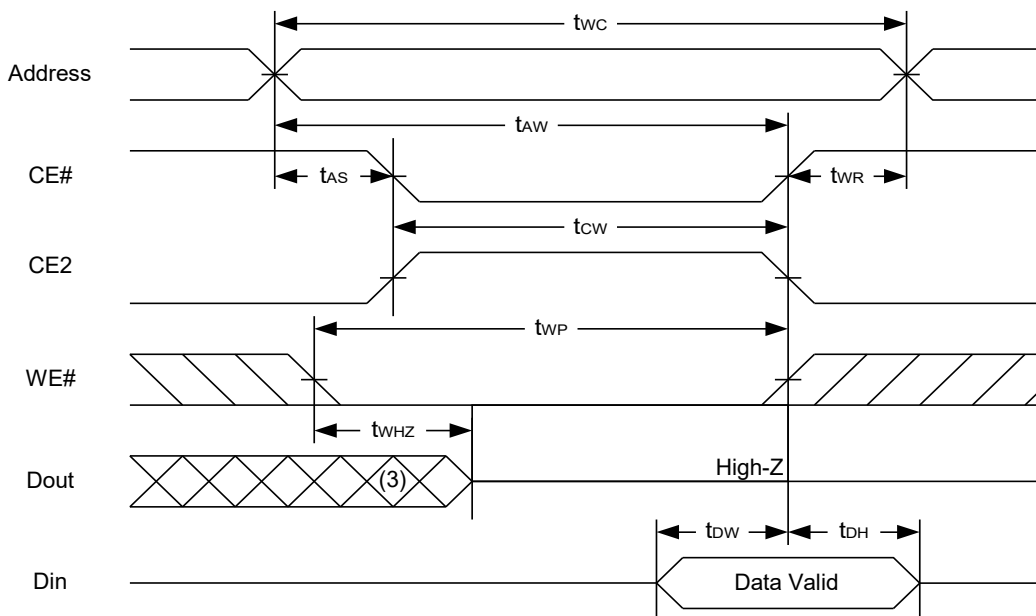

**Notes :**

1. A write occurs during the overlap of a low CE#, high CE2, low WE#.
2. During a WE# controlled write cycle with OE# low,  $t_{WP}$  must be greater than  $t_{WHZ} + t_{DW}$  to allow the drivers to turn off and data to be placed on the bus.
3. During this period, I/O pins are in the output state, and input signals must not be applied.
4. If the CE# low transition and CE2 high transition occurs simultaneously with or after WE# low transition, the outputs remain in a high impedance state.
5.  $t_{OW}$  and  $t_{WHZ}$  are specified with  $C_L = 5pF$ . Transition is measured  $\pm 500mV$  from steady state.




## DATA RETENTION CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
V <sub>CC</sub> for Data Retention	V <sub>DR</sub>	CE# ≥ V <sub>CC</sub> - 0.2V or CE2 ≤ 0.2V	1.5	-	3.6	V	
Data Retention Current	I <sub>DR</sub>	V <sub>CC</sub> = 1.5V CE# ≥ V <sub>CC</sub> - 0.2V or CE2 ≤ 0.2V Other pins at 0.2V or V <sub>CC</sub> - 0.2V	40°C	-	2	5	μA
				-	2	20	μA
Chip Disable to Data Retention Time	t <sub>CDR</sub>	See Data Retention Waveforms (below)	0	-	-	ns	
Recovery Time	t <sub>R</sub>		t <sub>RC</sub> *	-	-	ns	


t<sub>RC</sub>\* = Read Cycle Time

## DATA RETENTION WAVEFORM

**Low Vcc Data Retention Waveform (1)** (CE# controlled)

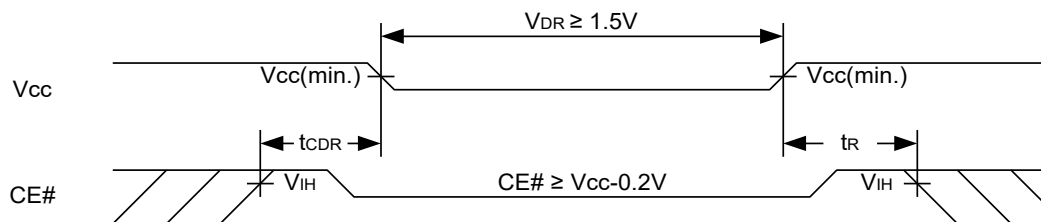


**Low Vcc Data Retention Waveform (2)** (CE2 controlled)

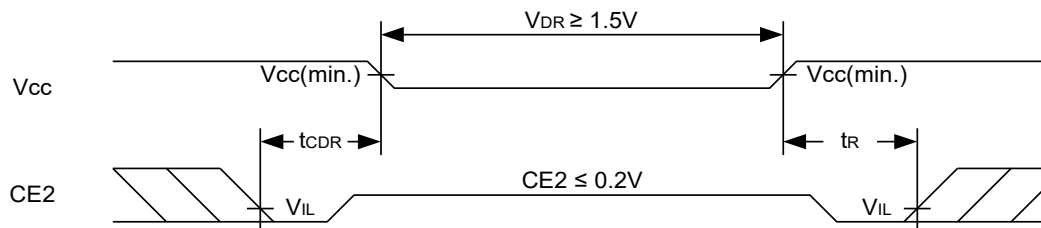

## PACKAGE OUTLINE DIMENSION

### 44-pin 400mil TSOP II Package Outline Dimension

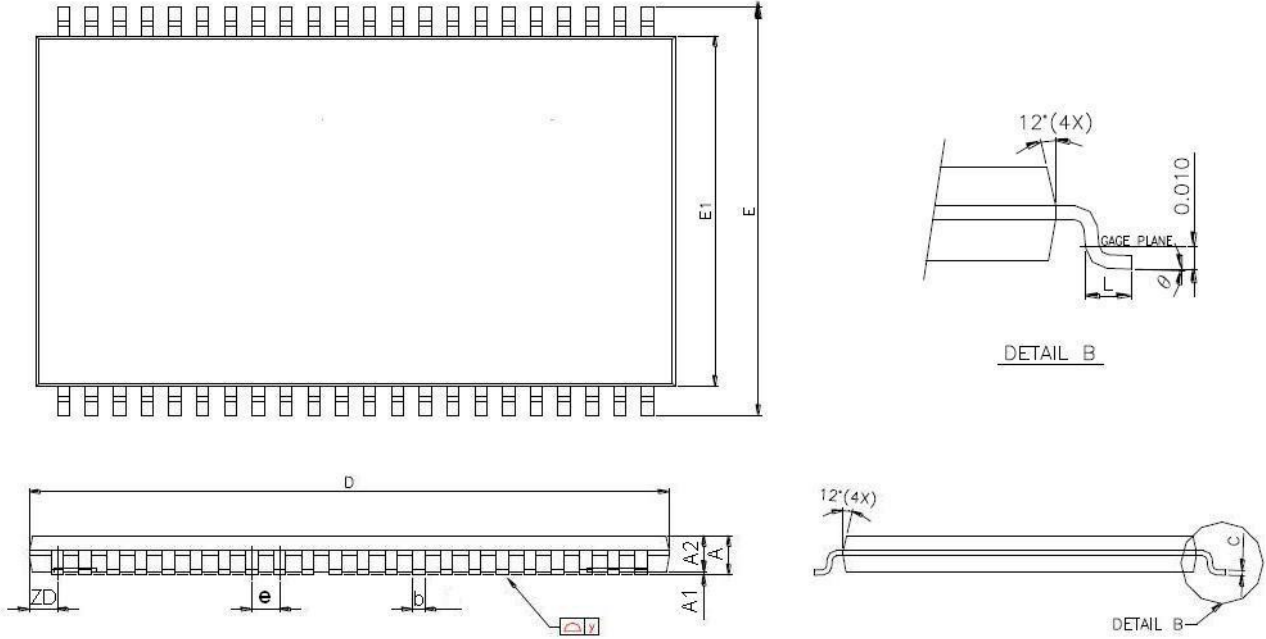

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN MILS		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	-	-	1.20	-	-	47.2
A1	0.05	0.10	0.15	2.0	3.9	5.9
A2	0.95	1.00	1.05	37.4	39.4	41.3
b	0.30	-	0.45	11.8	-	17.7
c	0.12	-	0.21	4.7	-	8.3
D	18.212	18.415	18.618	717	725	733
E	11.506	11.760	12.014	453	463	473
E1	9.957	10.160	10.363	392	400	408
e	-	0.800	-	-	31.5	-
L	0.40	0.50	0.60	15.7	19.7	23.6
ZD	-	0.805	-	-	31.7	-
y	-	-	0.076	-	-	3
Θ	0°	3°	6°	0°	3°	6°

## ORDERING INFORMATION

Alliance Part Number	Organization	VCC Range	Package	Operating Temp	Speed (ns)
AS6C8008B-45ZIN	1024K x 8	2.7 ~ 3.6V	44-pin 400 mil TSOP II	Industrial -40°C ~ 85°C	45
AS6C8008B-55ZIN	1024K x 8	2.7 ~ 3.6V	44-pin 400 mil TSOP II	Industrial -40°C ~ 85°C	55

## PART NUMBERING SYSTEM

AS6C	8008B	-45/55	Z	I	N	XX
<b>AS6C</b> = Low Power SRAM	Device Number <b>80</b> = 8Meg <b>08</b> = x8 bit <b>B</b> = B die version	Access Time <b>45</b> = 45ns <b>55</b> = 55ns	<b>Z</b> =TSOPII	<b>I</b> = Industrial Temp -40°C~ 85°C	<b>N</b> = Pb and Halogen Free	Packing Type <b>None</b> : Tray <b>TR</b> : Reel



Alliance Memory, Inc.  
12815 NE 124th Street Suite D  
Kirkland, WA 98034  
Tel: 425-898-4456  
Fax: 425-896-8628  
[www.alliancememory.com](http://www.alliancememory.com)

Copyright © Alliance Memory  
All Rights Reserved

© Copyright 2007 Alliance Memory, Inc. All rights reserved. Our three-point logo, our name and Intelliwatt are trademarks or registered trademarks of Alliance. All other brand and product names may be the trademarks of their respective companies.

Alliance reserves the right to make changes to this document and its products at any time without notice. Alliance assumes no responsibility for any errors that may appear in this document. The data contained herein represents Alliance's best data and/or estimates at the time of issuance.

Alliance reserves the right to change or correct this data at any time, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information in this product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide, any guarantee or warrant to any user or customer.

Alliance does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of Alliance products including liability or warranties related to fitness for a particular purpose, merchantability, or infringement of any intellectual property rights, except as express agreed to in Alliance's Terms and Conditions of Sale (which are available from Alliance).

All sales of Alliance products are made exclusively according to Alliance's Terms and Conditions of Sale. The purchase of products from Alliance does not convey a license under any patent rights, copyrights; mask works rights, trademarks, or any other intellectual property rights of Alliance or third parties.

Alliance does not authorize its products for use as critical components in life-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of Alliance products in such life-supporting systems implies that the manufacturer assumes all risk of such use and agrees to indemnify Alliance against all claims arising from such use.