


CUSTOMER DRAWING

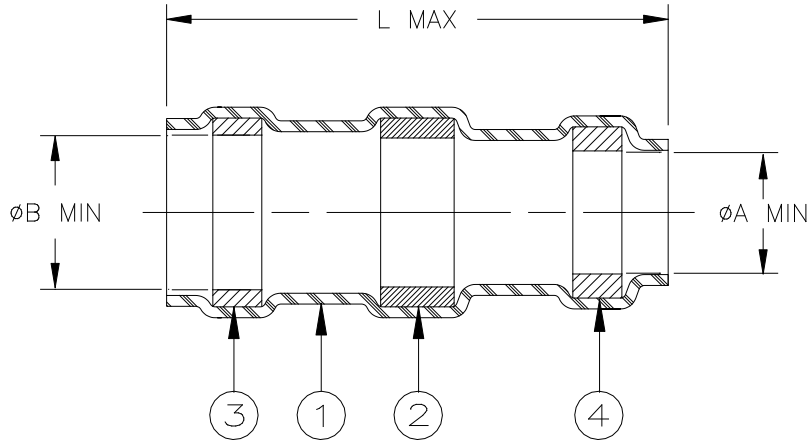

Product Name	Product Dimensions			Cable Dimensions			
	L max	Ø A min	Ø B min	Ø D max	Ø E min	J±0.5 (J±0.02)	M±0.5 (M±0.02)
D-104-31	29.75 (1.170)	10.80 (0.425)	11.65 (0.460)	11.43 (0.450)	5.70 (0.225)	8 (0.315)	9 (0.355)


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Sn63 per ANSI-J-STD-006.
FLUX: TYPE ROM1 per ANSI-J-STD-004.
- MELTABLE RING: Thermally stabilized thermoplastic. Color: blue.
- MELTABLE RING: Thermally stabilized thermoplastic. Color: natural.

APPLICATION

- This part is designed to provide an environment protected shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed, having nickel plated copper shields.
- Install using TE Connectivity approved convection or infrared tools in accordance with Raychem assembly procedure RCPS-100-70.
- Assemblies will meet requirements of Raychem specification RT-1404 and National Aerospace Standard NAS-1747.
- Temperature range: -55°C to +150°C.

For best results, prepare the cable as shown:



		Raychem THERMOFIT DEVICES	TITLE: SOLDERSLEEVE* SHIELD TERMINATOR		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.: D-104-31		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV : 5	DATE : 17-APR-2020	
DRAWN BY: M. FORONDA	DATE: 22-MAR-99	ECO: ECO-20-005247	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

*TE Connectivity, TE connectivity (logo), Raychem, THERMOFIT, SolderSleeve are trademarks