



SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	G±0.25
09	30.81	24.99	16.96	16.79	10.96	5.90
15	39.14	33.32	25.18	25.12	19.18	5.90
25	53.03	47.04	39.12	38.84	33.12	5.70
37	69.32	63.50	55.68	55.30	49.68	5.70

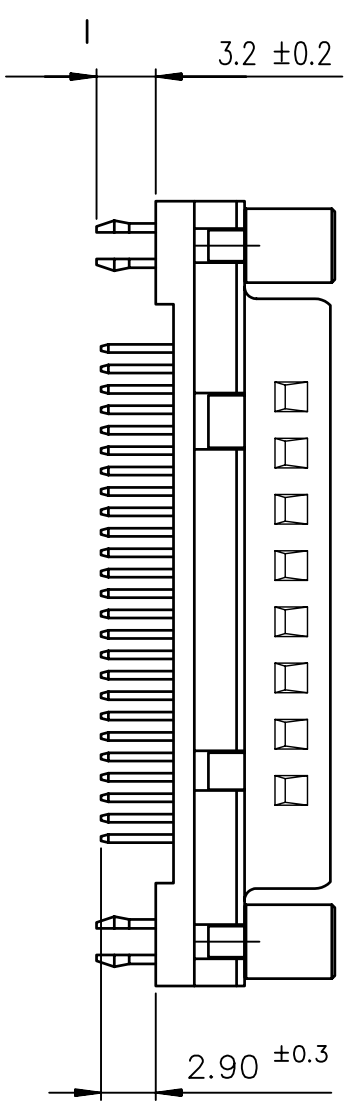

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

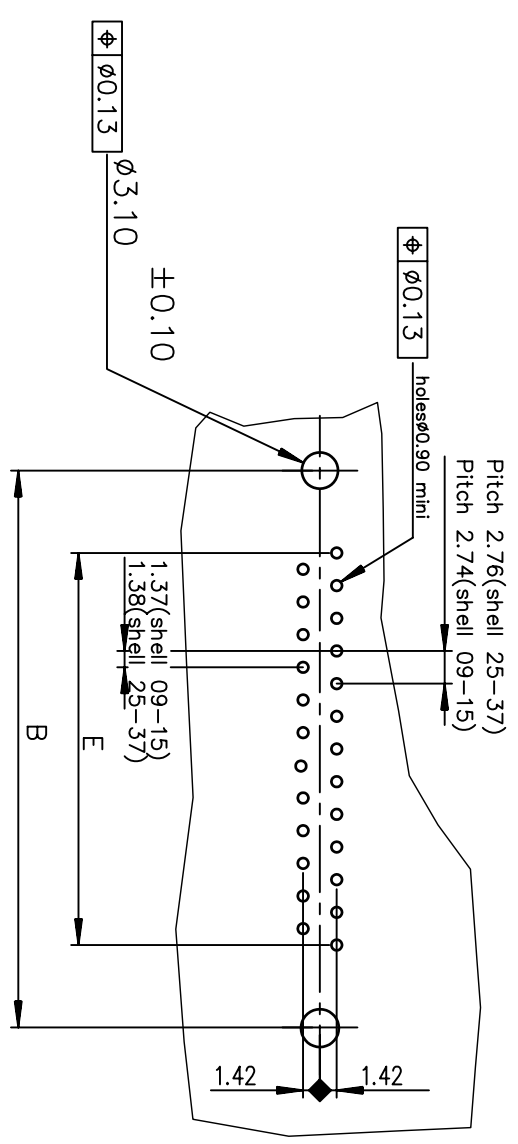

- 4 = Performance level PL3 ≥ 200 OPERATIONS
- 6 = Performance level PL1 ≥ 500 OPERATIONS
- 1 = SCREWLOCK Threaded M3
- V = SCREWLOCK Threaded UNC 4.40 sellers

SHELL	LEAD FREE PART NUMBER	TIN LEAD PART NUMBER	DESIGNATIONS
09	D09P24A*GI00LF	D09P24A*GI00	HEADER 9 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.
15	D15P24A*GI00LF	D15P24A*GI00	HEADER 15 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.
25	D25P24A*GI00LF	D25P24A*GI00	HEADER 25 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.
37	D37P24A*GI00LF	D37P24A*GI00	HEADER 37 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

rev	ecn no	dr	date
A	-	BAR	2003/04/16
B	LS05-001	MPE	2005/03/14
C	LS05-0056	LGO	2005/07/07
D	LS06-0097	LGO	2006/07/28
E	I09-0268	NG	2009-11-24
F	I10-0059	NG	2010-02-23

www.fciconnect.com

Dr JARRY 1995/08/11
Eng PESSON 1995/08/11
Chr NIRMAL GEORGE 2010-02-23
Appr SUDHIR VARMA 2010-02-23

surface ISO 1302
tolerance std ISO 406 ISO 1101
projection
Scale mm

European Views

Product family D-SUB
Spec ref -

FCI
e
HEADER DELTA D STD EUROPE
catalog no

C01-8646-0816
Rev. F

CUSTOMER sheet 1 of 1