
# 953697-1 - ACTIVE

### MQS

TE Internal #: 953697-1 Housing for Female Terminals, Wire-to-Wire, 3 Position, .1 in [2.54 mm] Centerline, Black, Wire & Cable, Signal, Cable Mount (Free-Hanging), MQS

#### View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > MQS, CONNECTOR HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: .63 mm [ .025 in ]

Connector System: Wire-to-Wire

Number of Positions: **3** 

Centerline (Pitch): 2.54 mm [.1 in]

All MQS, CONNECTOR HOUSING (571)

### Features

### Product Type Features

Connector Shape

Connector & Housing Type

Rectangular

Housing for Female Terminals



Connector System	Wire-to-Wire			
Sealable	No			
Hybrid Connector	No			
Primary Locking Feature	Integrated in Housing			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	3			
Number of Rows	1			
Electrical Characteristics				
Operating Voltage	24 VDC			
Nominal Voltage Architecture	24 V			
Body Features				
Cable Exit Angle	180°			
Primary Product Color	Black			

Housing for Female Terminals, Wire-to-Wire, 3 Position, .1 in [2.54 mm] Centerline, Black, Wire & Cable, Signal, Cable Mount (Free-Hanging), MQS



### **Contact Features**

Contact Size	.63mm
Contact Type	Receptacle
Mating Tab Width	.63 mm[.025 in]
Contact Current Rating (Max)	7.5 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Connector Height	17.6 mm[.693 in]
Product Width	8.6 mm[.339 in]
Product Length	13.9 mm[.547 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C[158 °F][167 °F] [176 °F][185 °F]
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Housing for Female Terminals, Wire-to-Wire, 3 Position, .1 in [2.54 mm] Centerline, Black, Wire & Cable, Signal, Cable Mount (Free-Hanging), MQS



### Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




Housing for Female Terminals, Wire-to-Wire, 3 Position, .1 in [2.54 mm] Centerline, Black, Wire & Cable, Signal, Cable Mount (Free-Hanging), MQS






## Also in the Series | MQS

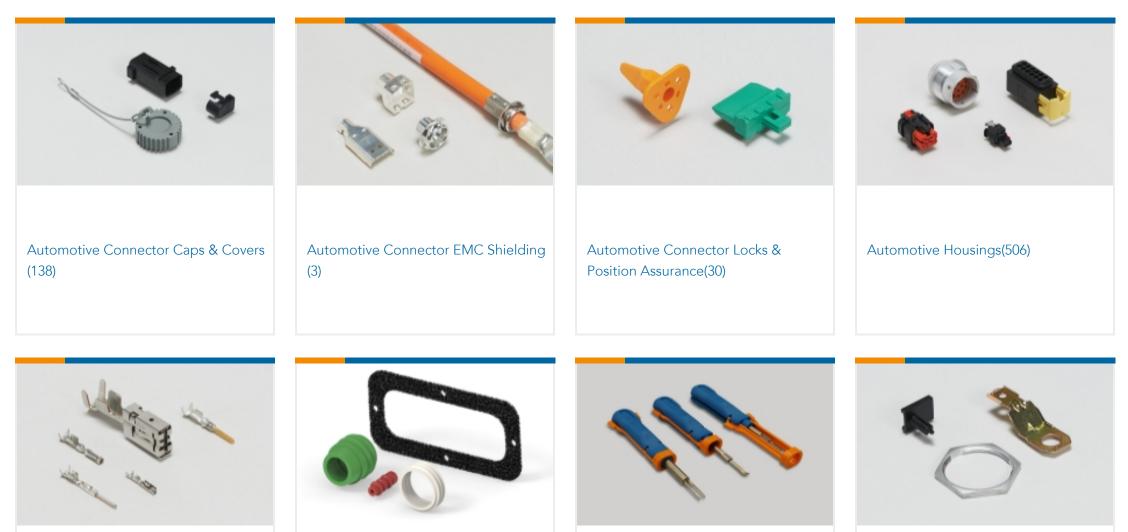

Automotive Terminals(104)	Connector Seals & Cavity Plugs(27)	Insertion & Extraction Tools(42)	Other Automotive Connector Accessories(14)



PCB Headers & Receptacles(214)

## Customers Also Bought



Housing for Female Terminals, Wire-to-Wire, 3 Position, .1 in [2.54 mm] Centerline, Black, Wire & Cable, Signal, Cable Mount (Free-Hanging), MQS





## Documents

### Product Drawings 3POS MQS REC

English

### **CAD** Files

3D PDF

English

**Customer View Model** 

ENG\_CVM\_953697-1\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_953697-1\_A.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_953697-1\_A.2d\_dxf.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Micro Quadlok Interconnection System (MQS)

English

Product Specifications Product Specification

French

Instruction Sheets Instruction Sheet (non U.S.)

English