


# International **IR** Rectifier

SCHOTTKY RECTIFIER

**1N6392**

60 Amp



TO-203AB (DO-5)

## Major Ratings and Characteristics


Characteristics	1N6392	Units
$I_{F(AV)}$ Rectangular waveform	60*	A
$V_{RWM}$	45*	V
$I_{FSM}$ @ 60Hz	1000*	A
$V_F$ @ 60 Apk, $T_J = 25^\circ\text{C}$	0.68*	V
$T_J$ range	-55 to 175*	$^\circ\text{C}$

\* JEDEC Registered Values

## Description/ Features

The 1N6392 Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to  $175^\circ\text{C}$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $175^\circ\text{C} T_J$  operation
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Hermetic packaging
- Military qualified versions also available

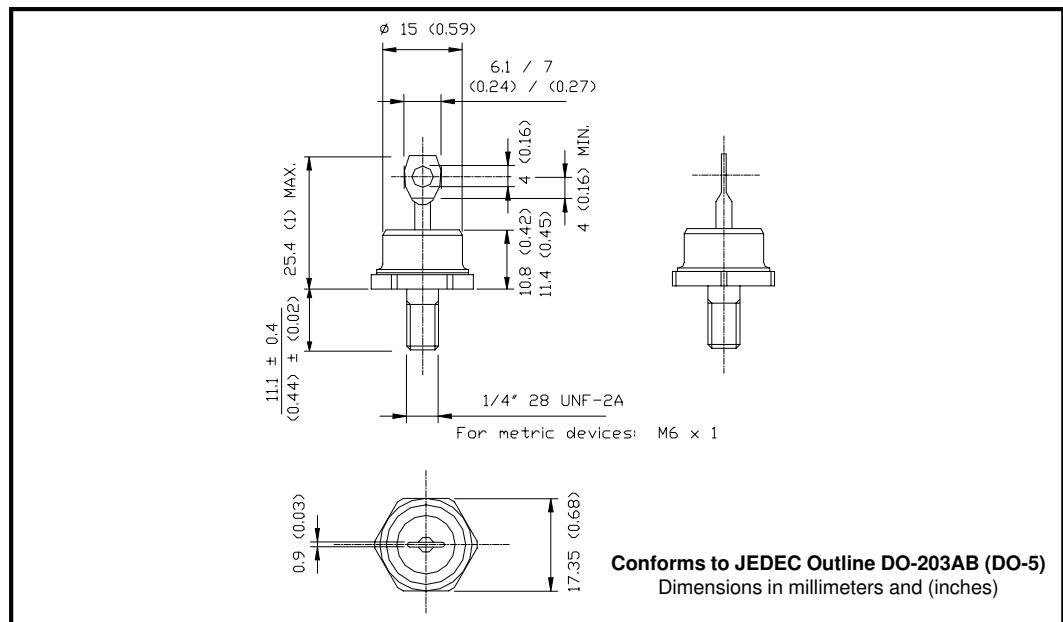

1N6392

Bulletin PD-2.080 rev. C 11/02

International  
 Rectifier

**Voltage Ratings**

Part number	1N6392	
$V_R$ Max. DC Reverse Voltage (V)		45*
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)		

**Absolute Maximum Ratings**

Parameters	1N6392	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current See Fig. 5	60*	A	50% duty cycle @ $T_C = 115^\circ\text{C}$ , rectangular wave form
	54*		50% duty cycle @ $T_C = 115^\circ\text{C}$ , sinusoidal wave form
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current See Fig. 7	9000	A	5μs Sine or 3μs Rect. pulse. Following any rated load condition and with rated $V_{RRM}$ applied
	1000*		60Hz half cycle sine wave or 5ms rectangular pulse
$E_{AS}$ Non-Repetitive Avalanche Energy	101	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 15$ Amps, $L = 0.9$ mH
$I_{AR}$ Repetitive Avalanche Current	15	A	Current decaying linearly to zero in 1 μsec Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical

**Electrical Specifications**

Parameters	1N6392	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (1) See Fig. 1	0.47*	V	@ 10A
	0.68*	V	
	0.82*	V	
	0.59*	V	@ 10A $T_J = -55^\circ\text{C}$
$I_{RM}$ Max. Reverse Leakage Current (1) See Fig. 2	20*	mA	$T_J = 25^\circ\text{C}$
	60*	mA	$T_J = 125^\circ\text{C}$
	600*	mA	$T_J = 175^\circ\text{C}$
$C_T$ Max. Junction Capacitance	3000	pF	$V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance	7.5	nH	Measured from top of terminal to mounting plane
$dv/dt$ Max. Voltage Rate of Change	10000	V/ μs	(Rated $V_R$ )

**Thermal-Mechanical Specifications**

(1) Pulse Width &lt; 300μs, Duty Cycle &lt; 2%

Parameters	1N6392	Units	Conditions
$T_J$ Max. Junction Temperature Range	-55 to 175*	°C	
$T_{stg}$ Max. Storage Temperature Range	-55 to 175*	°C	
$R_{thJC}$ Max. Thermal Resistance Junction to Case	1.0*	°C/W	DC operation See Fig. 4
$R_{thCS}$ Typical Thermal Resistance, Case to Heatsink	0.25*	°C/W	Mounting surface, smooth and greased
$R_{thCA}$ Max. Thermal Resistance, Case to Ambient	7.0*	°C/W	$R_{thCA}$ is the value for which device blocking stability with rated $V_R$ or $V_{RWM}$ applied assured, when $T_A = 25^\circ\text{C}$ and $T_C = 148^\circ\text{C}$ (DC) or $T_C = 163^\circ\text{C}$ (AC operation)
wt Approximate Weight	15.6 (0.55)	g (oz.)	
T Mounting Torque	Min.	2.26 (20)	N-m
	Max.	3.39 (30)	(lbf-in)
Case Style	DO-203AB(DO-5)		JEDEC

\* JEDEC Registered Values

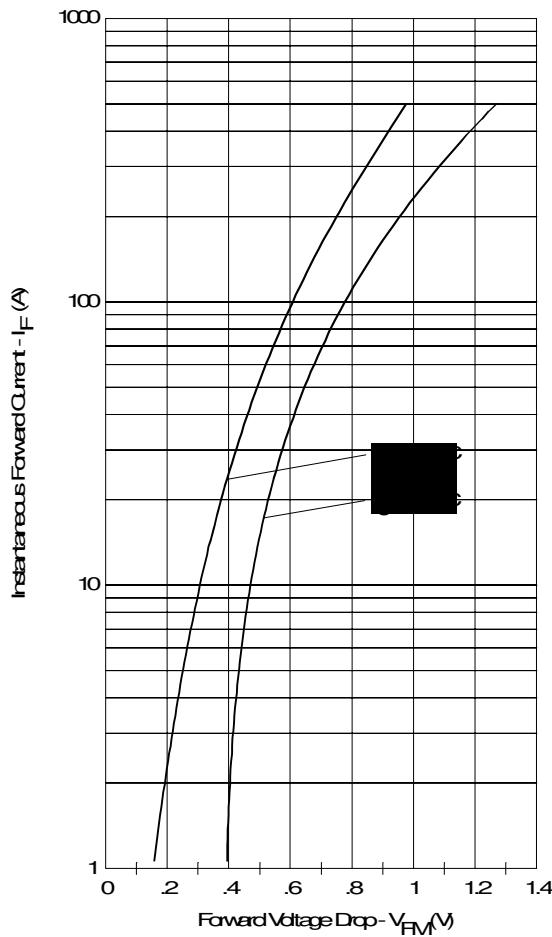


Fig. 1 - Maximum Forward Voltage Drop Characteristics

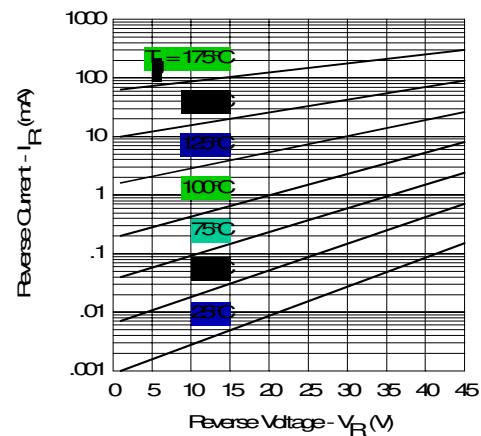


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

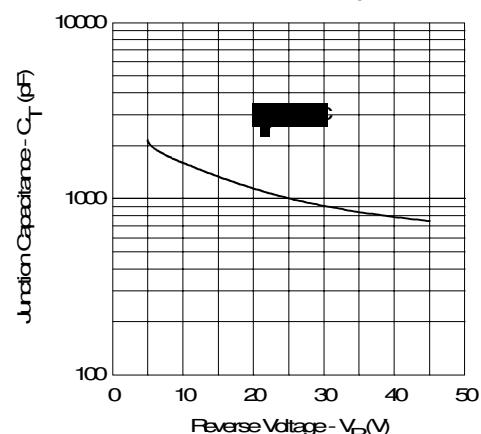


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

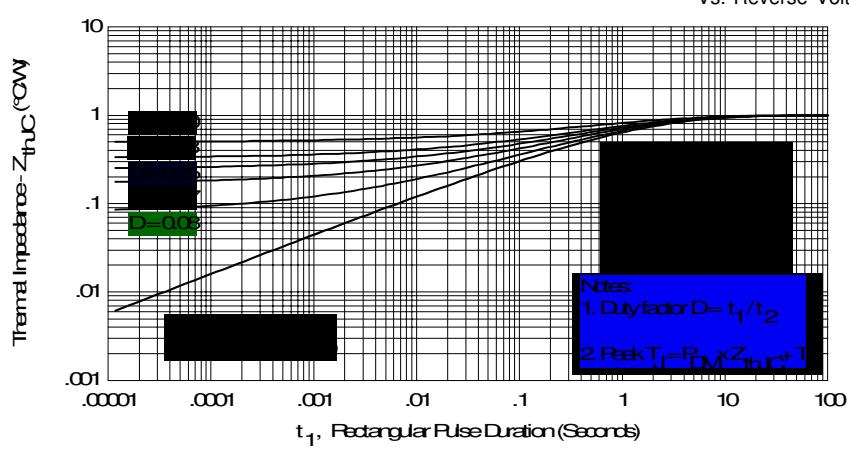


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

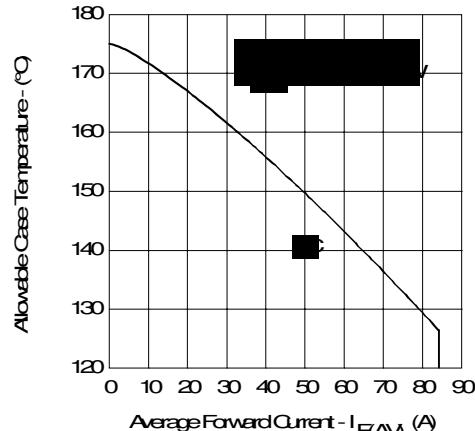


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

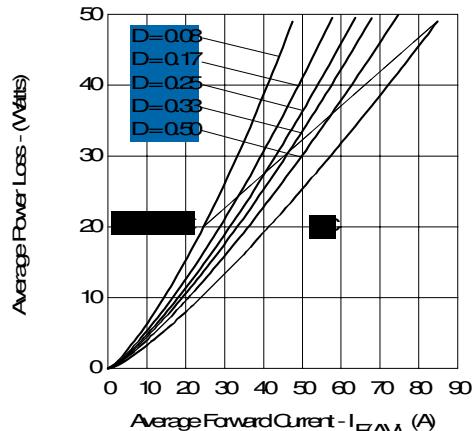


Fig. 6 - Forward Power Loss Characteristics

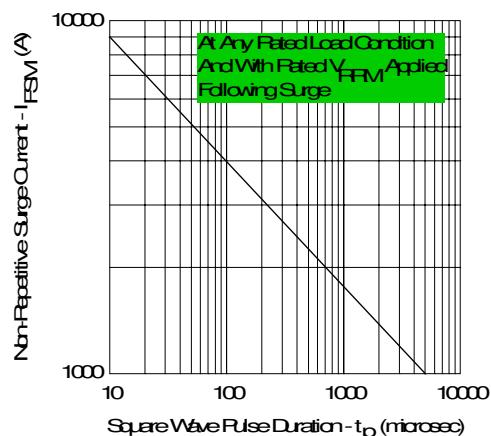


Fig. 7 - Maximum Non-Repetitive Surge Current

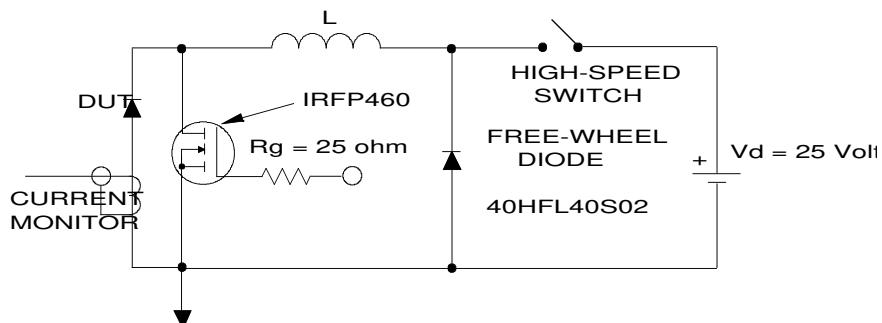


Fig. 8 - Unclamped Inductive Test Circuit

Data and specifications subject to change without notice.  
This product has been designed for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 11/02