


No. of Contacts	DIMENSIONS	
	A	B
24	10.00	12.00
28	12.00	14.00
32	14.00	16.00
36	16.00	18.00
40	18.00	20.00
44	20.00	22.00
48	22.00	24.00
52	24.00	26.00
56	26.00	28.00
60	28.00	30.00
64	30.00	32.00
68	32.00	34.00
72	34.00	36.00
76	36.00	38.00
80	38.00	40.00
84	40.00	42.00
88	42.00	44.00
92	44.00	46.00
96	46.00	48.00
100	48.00	50.00
104	50.00	52.00
108	52.00	54.00
112	54.00	56.00
116	56.00	58.00
120	58.00	60.00

**SPECIFICATIONS**  
 Current Rating: 1 Amp  
 Insulator Resistance: 5000 Mega Ohms min.  
 Dielectric Withstanding: 500 VAC  
 Operating Temperature: -40 Degrees C to +105 Degrees C  
 Contact Material: Brass or Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 © Standard: Nylon-6T  
 Contact Finish: Selective Plating, Gold/Tin

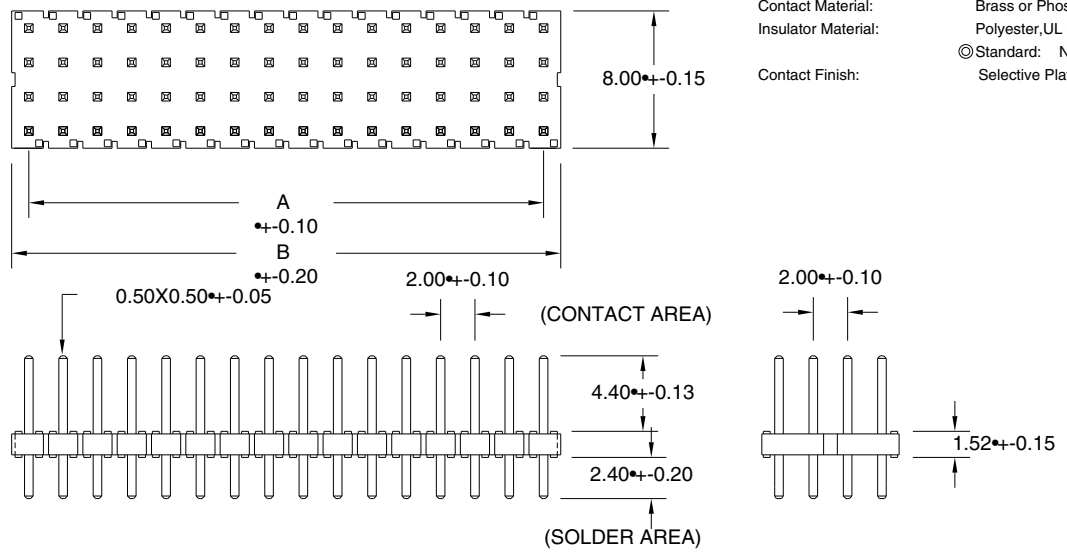

**SULLINS**  
 801 E. MISSION RD.  
 SAN MARCOS, CA 92069

GENERAL TOLERANCE		SCALE	3:1	DRAWN	DATE	DWG. NO.	T0019	TITLE	REV.
XX. ±	XXX. ±	UNIT	MM	CHECK	DATE	PARTS NO.	PRPNxx4RCCN		SHEET
X. ± 0.20	.XXX ±	SIZE	A4	APPROVE	DATE				
.X ± 0.10									
.XX ± 0.05									