


± I	Q	н г	m	0

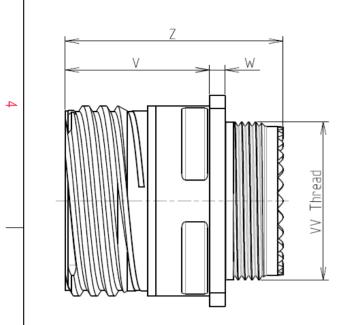

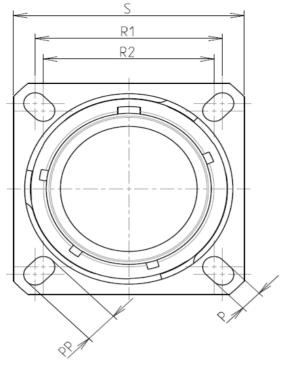



Keying Shown as exam

CHARACTERISTICS

ω

 \mathbf{N}

-Mass

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating : Thermoplastic -Insulator -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet : Gold over copper Alloy $0.8 \mu m$ minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C -Salt Spray : 48 hours

: 12.01 g ± 10%

8D 0

G

11

-

F

01

Ρ

F

В

VV T

т	D		0		ω		А	
								4
			LA	YOUT SHOWN AS E	XAMPLE			3
Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 20.62 R2 18.26 S 26.2±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max HREAD M15x1-6g PN: 8D011F01PB								
	A 14-1	LO-2016 F	irst Release					
		DATE	Latest modification	on - by				MOD N°
	Designed By:	gned By: Date: CUSTOMER DRAWING TITLE Aluminium Receptacle 8D series						
	SCALE NA	-	$\exists \bigoplus$	General linear Tolerances: ±		8	PROJECT 59	
ORIENTATION CONTACT TYPE : PIN(500 Matin		OURIAU This document is the proper SOURIAU WWW.SOURIAU.COM it must not be reproduce communicated without perr				rmission		
CONTACT LAYOUT : 11	L-01 FORMAT A3		SOURIAU DRG N° SHEET 8D011F01PB-C 1/2				SHEET 1/2	
E	D		С		B B		A	1/2
V								

		G	г П	m	D	0
		Contact Layout				Panel Cutout
4		01			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01]		₹7 -	
ω	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
2						(professional recommendati Country FR PN: 8D011F
					A 14-10-202 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_					TITLE SCALE NA	Aluminium General linear Tolerances: ±
					FORMAT A3	J WWW.SOURIAU.CO SOURIAU 8D011F0
	H	G	F	E	D	C

