


NOTES:

1. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µm HARD GOLD over min. 50µm NICKEL
4. METAL BRACKET: STEEL; min. 320µm TIN over 80µm NICKEL
5. THREADED LOCK: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
6. FIXING PLATE: PBT GF UL 94 V-0, BLACK
7. PCB-SNAP: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
PCB-HOLE: $\varnothing 3,1 \pm 0,1$ mm; PCB-THICKNESS: 1,6mm
8. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
9. CONNECTOR IS PART MARKED: 163A19329X CONEC ABC

Directive 2002/95/EC
„RoHS“
Compliant

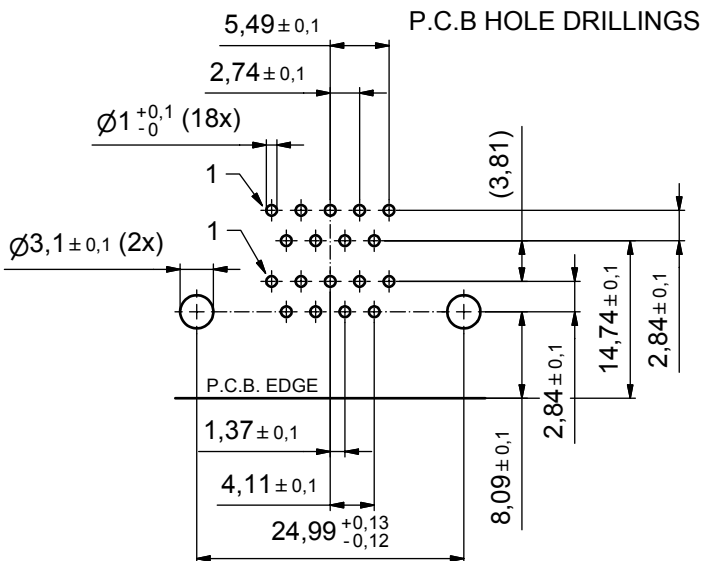

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND			
finish:	SEE NOTES		
tolerance			
	date	name	dim. in mm
	drawn 25.01.07	Lehmenkühler	
	appd. 25.01.07	Mickenbecker	
	norm	DIN 41652	
	d-old		
a	Origin		
rev.	description	date	name

scale: 2:1	
material: SEE NOTES	
title: D-SUB DUAL PORT 15.88mm 9pos. MALE / 9pos. MALE with threaded lock and snap	
dwg no: 16K1A1967	Inventor
DIN-A3	
sh: 1	
part no: 163A19329X	

