
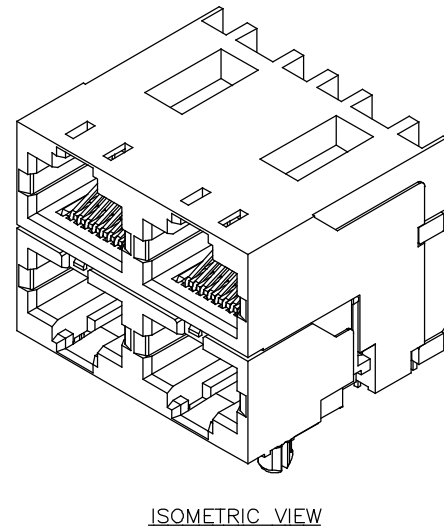
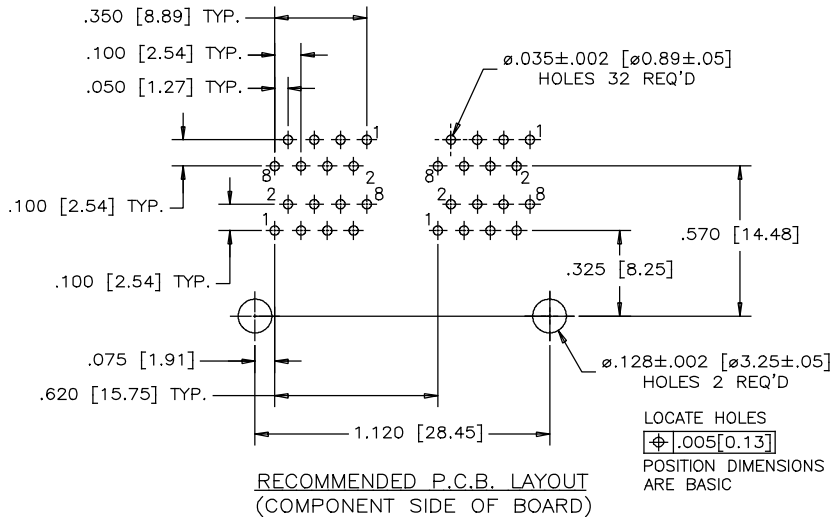
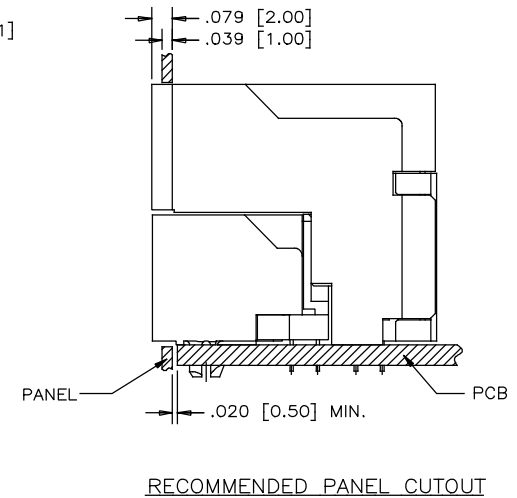
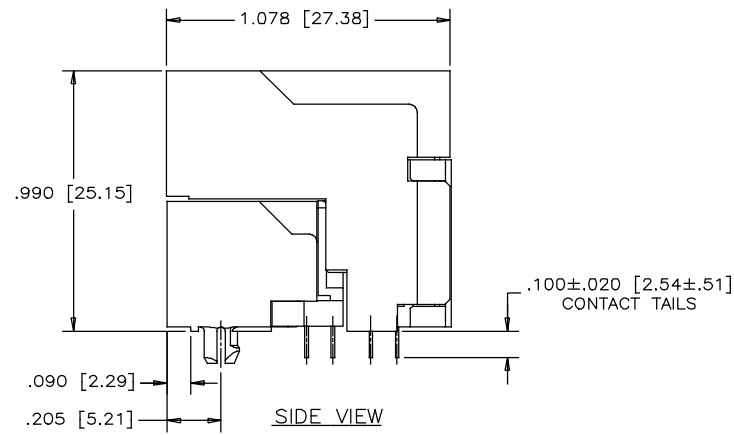


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	OCT29/19	L.CHAN

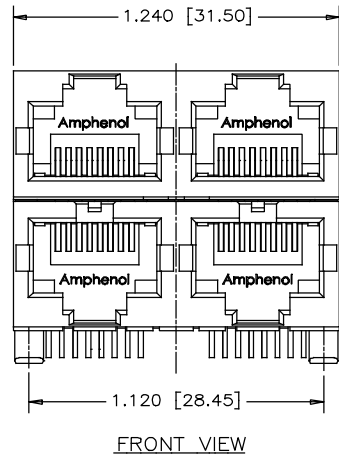

NOTES:

1. MATERIALS:

CONTACTS: PHOSPHOR BRONZE, SELECTIVE GOLD PLATING ON MATING SURFACES SEE PART NO. FOR THICKNESS. 50 MICROINCHES MIN. NICKEL OVERALL. 100 MICROINCHES MIN. MATTE TIN OR GOLD FLASH ON TAILS.


HOUSING: ENGINEERING PLASTIC, FLAMMABILITY RATING UL 94V-0, BLACK

2. RECOMMENDED SOLDERING TEMPERATURE:

WAVE SOLDERING PEAKED AT 260°C FOR 10 SEC MAXIMUM

AMPHENOL PART NO.: RJSAE-X080-04

GOLD PLATING OPTION:
D=6u" GOLD PLATING
G=15u" GOLD PLATING
J=30u" GOLD PLATING
5=50u" GOLD PLATING

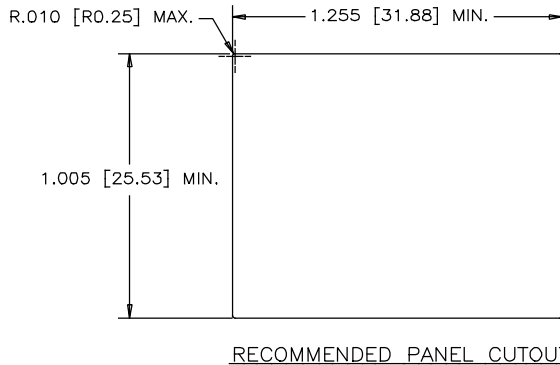

UNLESS SPECIFIED OTHERWISE	DRAWN	RONNIE.C	OCT29/19
PRIMARY UNITS INCHES	CHECKED	KELVIN.T	OCT29/19
SECONDARY MILLIMETERS	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES ±.015			
ANGULAR DEGREES ±1.5°	THIRD ANGLE PROJECTION		
	DO NOT SCALE DRAWING		

Amphenol Canada Corp. Commercial Products	
STACKABLE 2x2 PORT MODULAR JACK, 8 POSITION, 8 CONTACTS, WITHOUT LED, 0.100INCH CONTACT TAILS, UNSHIELDED - RoHS COMPLIANT	
DWG NO.	P-RJSAE-X080-04
CODE ID NO. 03554	DWG SIZE X SCALE 1:1 SHEET 1 OF 1