

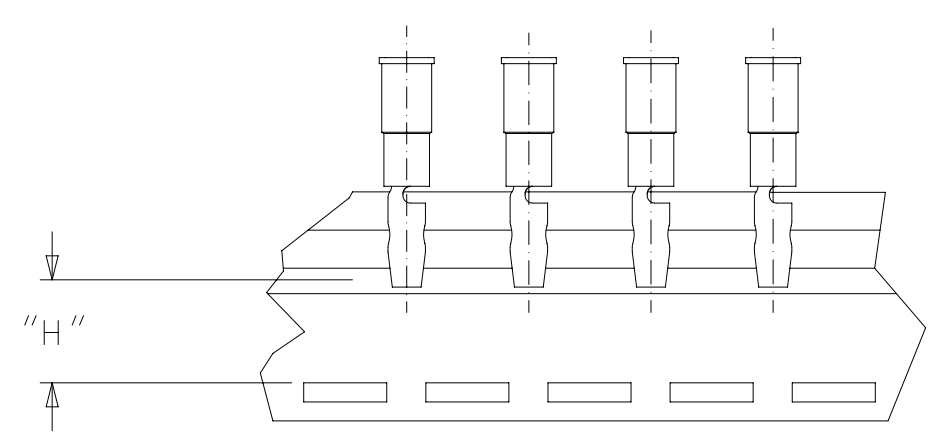


10		9		8		7	6	5	4	3	2	1
LOOSE PIECE		TAPE MOUNTED		WIRE RANGE AWG	INSULATION COLOR	I.D. MIN.	PLUG DIA.	MAX "L"	"MWID"	"H" ±.010/0.25		
MATERIAL NO.	ENG. NO.	MATERIAL NO.	ENG. NO.									
190350001	A-559	190350002	A-559T	18-22	RED	.056/1.42	.180/4.57	1.046/26.57	.140/3.56	.495/12.57		
190350003	A-569	190350004	A-569T	18-22	RED	.056/1.42	.156/3.96	.991/25.17 (C1)	.140/3.56	.555/14.10		
190350005	B-579	190350008	B-579T	14-16	BLUE	.084/2.13	.180/4.57	1.046/26.57	.170/4.32	.495/12.57		
190350009	B-589	190350012	B-589T	14-16	BLUE	.084/2.13	.156/3.96	.991/25.17 (C1)	.170/4.32	.555/14.10		

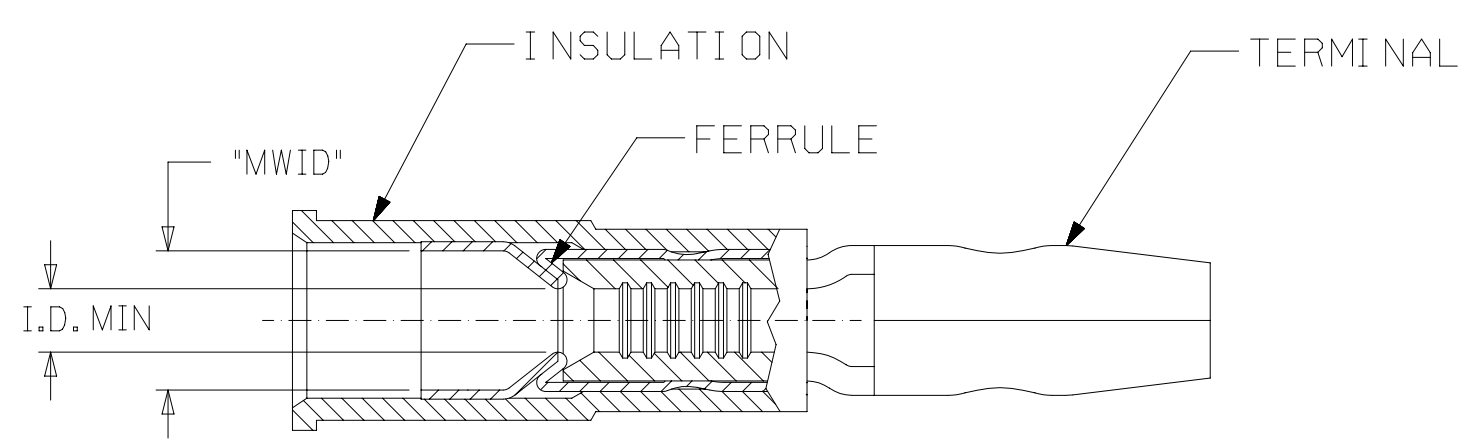

TAPE MOUNTING DETAIL

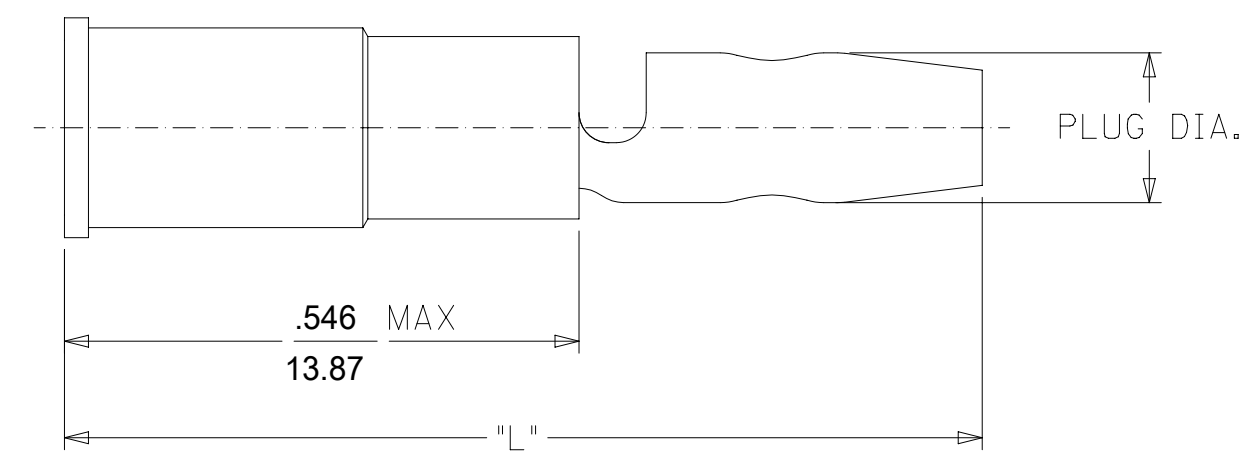

- NOTE(S):
1. TERMINAL: MATERIAL COPPER .032 (0.81)THK MAX
FINISH: ELECTRO-TIN
FERRULE: MATERIAL BRASS
FINISH: ELECTRO-TIN
INSULATION: NYLON
 2. MWID = MAXIMUM WIRE INSULATION DIAMETER.
 3. ASSEMBLY IS RoHS COMPLIANT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
FUNCTIONAL SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATE TO NX & MAX DIM "L" .991 WAS .986					
FA = 0		INCH/MM		1:1		molex MALE BULLET SNAP PLUG, MOLDED, AVIKRIMP PRODUCT CUSTOMER DRAWING EC NO: 642291 DRWN: DMYRICK 2020/07/23 CHK'D: JMACNEIL 2020/07/28 APPR: JMACNEIL 2020/07/28 INITIAL REVISION: DRWN: APPR:					
FE = 0		GENERAL TOLERANCES (UNLESS SPECIFIED)									
FP = 0		MM		INCH							
DIVISIONAL SYMBOLS		4 PLACES ±		±							
		3 PLACES ±		± 0.005							
		2 PLACES ±		± 0.13 ± 0.01							
		1 PLACE ±		± 0.25 ±							
		0 PLACES ±		±							
		ANGULAR TOL		± 0.5°							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER	
				B-SIZE		19035		SEE CHART		CUSTOMER	
								GENERAL MARKET		SHEET NUMBER	
								1 OF 1			