


5

4

3

2

1

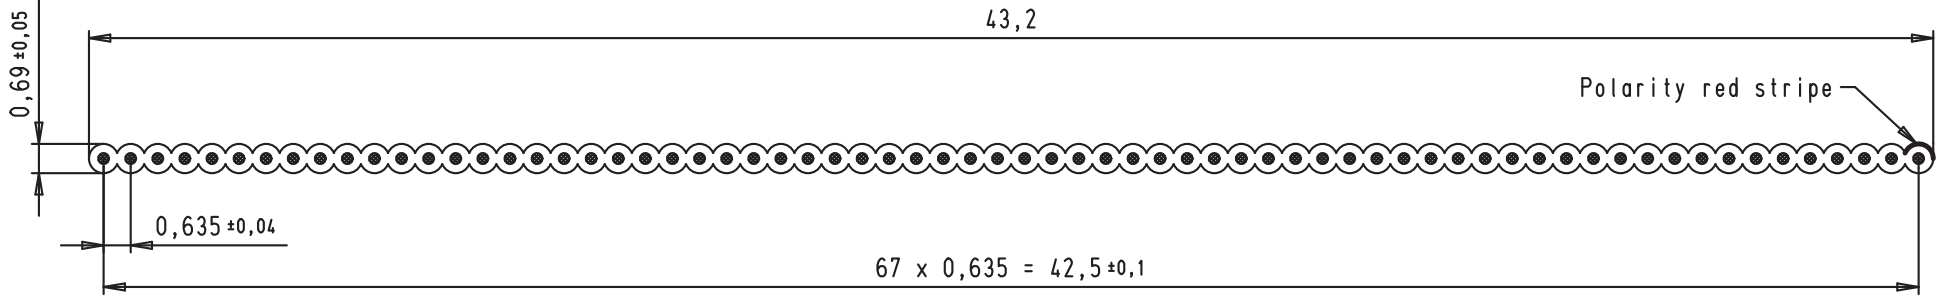

Wire _____ Cu tin plated
Gauge stranded _____ AWG 30 / 7 strands AWG 38
Voltage rating _____ 150 V
Capacitance _____ 83,2 pF/m (single end)
_____ 47,6 pF/m (differential)
Impedance _____ 67 Ω (single end)
_____ 110 Ω (differential)
Conductor resistance _____ 348 m Ω /m
Signal delay _____ 5,31 ns/m
Insulation material _____ PVC
Temperature rating _____ -30°C to +105°C

				Det.	Name		Flat cable Length per reel : 30,48 m 68 poles, UL 2678	Maßstab/ Scale 6:1		
				Detail.	31/05/07	PK				
				Insp.						
				Stand.						
						All Dim. in mm Orig. Size DIN A 4				
				34361	31/05/07	PK	HARTING EURL F-95972 Paris		TB 60 90 068 6008	Blatt/ Page 1 / 1
				Mod.	Det.	Name				

D

C

B

A