

NOTES:

Plunger: Brass, 20μ" MIN Au over, 50μ" MIN Ni over

Barrel : Brass, 3μ" ,MIN Au over, 50μ" MIN Ni over

Spring : Stainless Steel

Mechanical Characteristics:

Spring Force : 60g ± 20% at Working Length

Mechanical Life : 1,000,000 cycle


Electrical Characteristics:

Current Rating : 2A

Contact Resistance : 20 mΩ Max

Operating Temperature range : -55~125° C

Packing: PE Bag

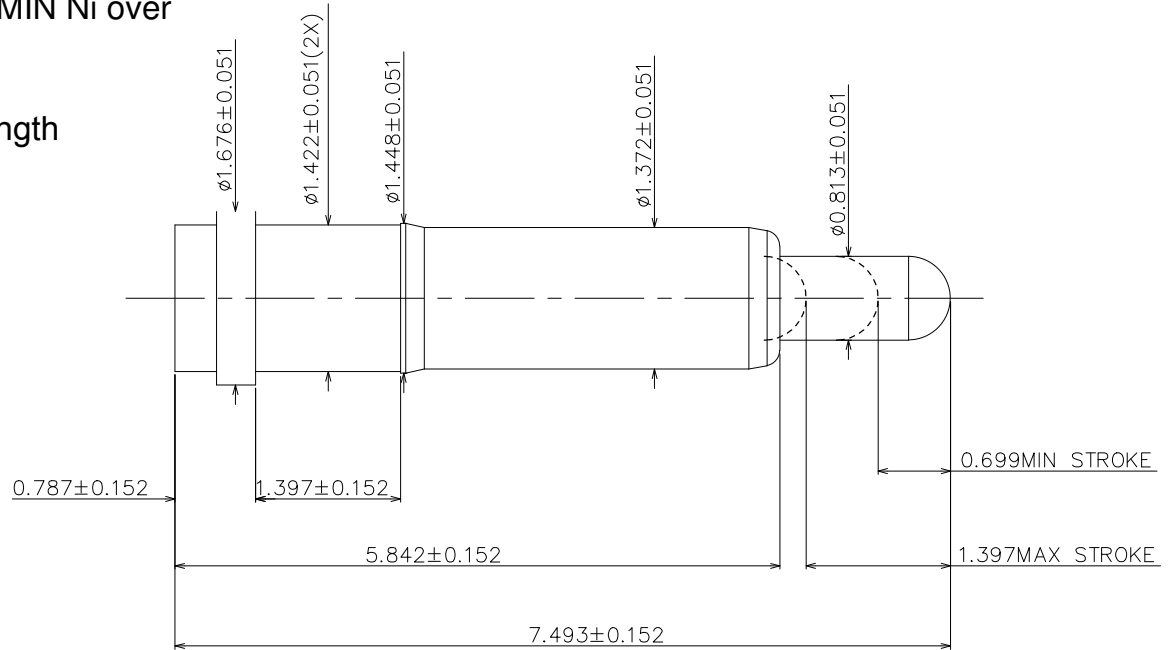

RoHS compliant

Unit: mm

Scale	Free					Date	Name	Customer-No.	
TOLERANCE					Drawn	28.03.2018	Tom	ASSMANN WSW-No. A-CSL-S-020-B5	
X.X	±0.20				Approved	28.03.2018	Winnie		
X.XX	±0.10								
X.XXX	±0.08								
DIM	TOL							Drawing-No.	
								ASS 7956 CO	rev00
Angle	±3°	ⓐ	Drawn	28.03.2018				Tom	Replace
Angle	TOL	Id.	Modification	Date	Name				