ARJE-0051



21.97 x 16.51 x 14.10mm (Pb) RoHS/RoHS II Compliant

FEATURES

- 10/100/1000Base-T compatibility
- Integrated yellow and green LEDs (only applicable to ARJE-0051 MASA/MBSA)
- Wide 0C to 70C operating temperature range
- Integrated magnetics
- Integrated shielding excellent EMI performance
- Integrated shielding with metal fingers (only applicable to ARJE-0051 MASA/MASB)

STANDARD SPECIFICATIONS


APPLICATIONS

- Internet of Things (IoT)
- Video IP cameras
- Machine-to-machine (M2M)
- Media converters
- Networking equipment
- Network interface cards (NIC)

Dout Number	Turns Ratio	EMI Fingers	LEDs	Inductance @100kHz, 0.1Vrms, 8mADC (min)	Insertion Loss (dB max)		Return Loss (dB min)	
Part Number $\pm 3\%$	± 3%		L/R		0.1-100 MHz	100-125 MHz	0.5-40 MHz	40-100 MHz
ARJE-0051-MASA	1CT:1CT	Yes	G/Y	350 uH	1.0	1.2	18.0	12-20Log(F/80)*
ARJE-0051-MASB	1CT:1CT	Yes	None	350 uH	1.0	1.2	18.0	12-20Log(F/80)*
ARJE-0051-MBSA	1CT:1CT	No	G/Y	350 uH	1.0	1.2	18.0	12-20Log(F/80)*
ARJE-0051-MBSB	1CT:1CT	No	None	350 uH	1.0	1.2	18.0	12-20Log(F/80)*

	Part Number	Crosstalk (dB min) 0.1-100 MHz	Common Mode Rejection (dB min) 0.1-100 MHz	Hipot (min)	
	ARJE-0051-MASA	33-20Log(F/50)*	32.0	2250 VDC	
	ARJE-0051-MASB	33-20Log(F/50)*	32.0	2250 VDC	
	ARJE-0051-MBSA	33-20Log(F/50)*	32.0	2250 VDC	
Γ	ARJE-0051-MBSB	33-20Log(F/50)*	32.0	2250 VDC	

PART NUMBER IDENTIFICATION

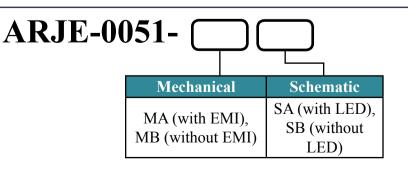



5101 Hidden Creek Lane Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sale please visit: www.abracon.com

REVISED: 09/26/2016


ABRACON IS ISO9001-2008 CERTIFIED

ARJE-0051




21.97 x 16.51 x 14.10mm (Pb) RoHS/RoHS II Compliant

MECHANICAL DIMENSIONS: mm (unless otherwise specific, all tolerances are ±0.01/0.25)

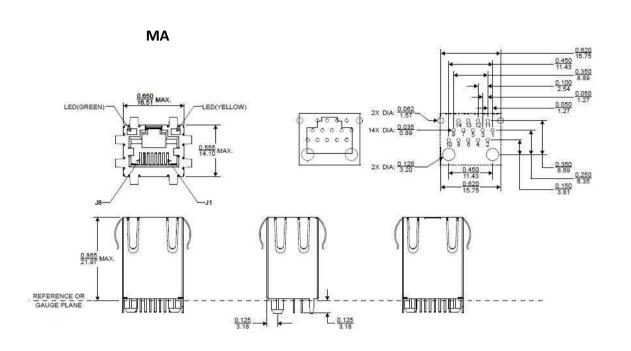



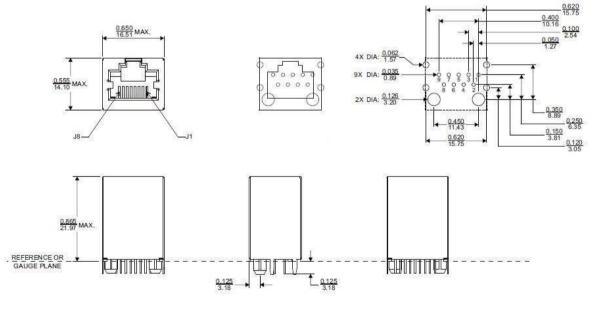



5101 Hidden Creek Lane Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sale please visit: www.abracon.com

REVISED: 09/26/2016


ABRACON IS ISO9001-2008 CERTIFIED

ARJE-0051



21.97 x 16.51 x 14.10mm (Pb) RoHS/RoHS II Compliant


SCHEMATIC

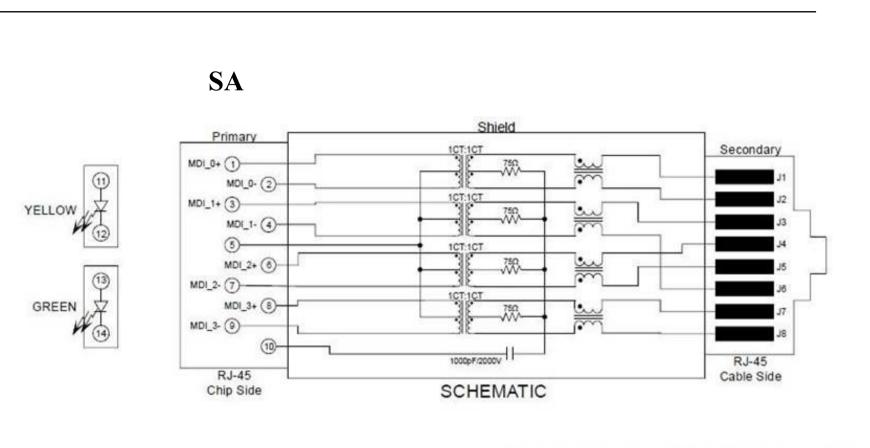

LED SPECIFICATION @20mA FORWARD CURRENT

Color	GREEN	YELLOW	
Wavelength	565nm Typ	590nm Typ	
Forward Voltage	2.2V Typ	2.1V Typ	

SB

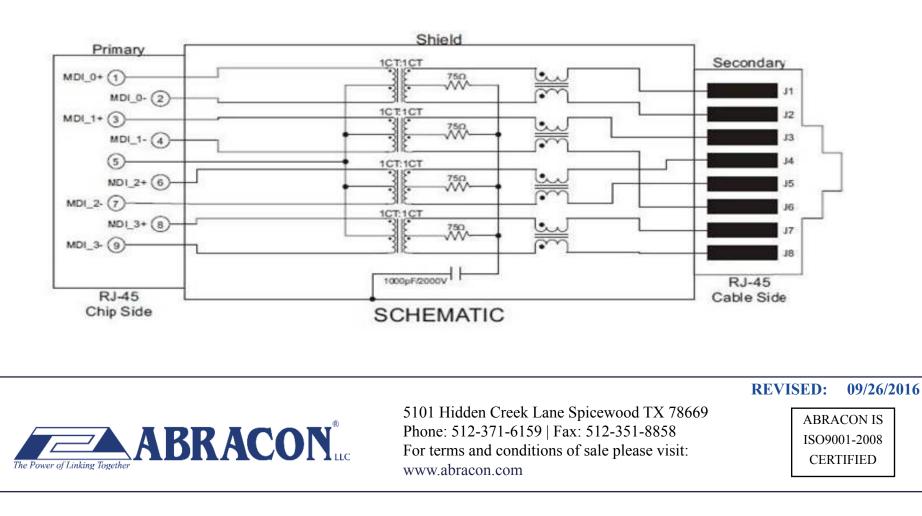


ARJE-0051



21.97 x 16.51 x 14.10mm **RoHS/RoHS II Compliant**

PACKAGING

T: (38 pcs/tray, 304 pcs/carton)

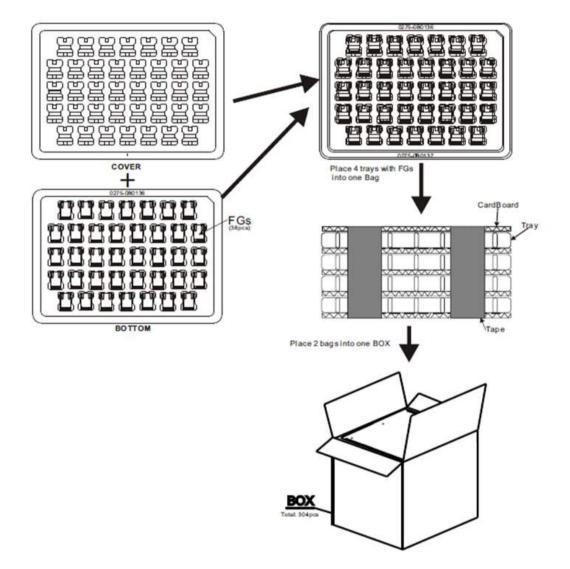

NOTES

- 1. The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- 2. ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- 3. In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- 4. When changing your production process, please notify ABRACON immediately.
- 5. ABRACON LLC's products are COTS Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life- dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON LLC is required. Please contact ABRACON LLC for more information.
- 6. All specifications and Marking will be subject to change without notice.



5101 Hidden Creek Lane Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sale please visit: www.abracon.com

REVISED: 09/26/2016

ABRACON IS ISO9001-2008 CERTIFIED